AUK CORP.

Photo Transistor

KDT-6315A

Description

The KDT-6315A is a high-sensitivity & surface mount type silicon phototransistor. It's ideal for various kinds of optical transistor such as touch panels for C/D, ATM, Car navigation system and even AV Instrument and various types of disk driver.

Features

- Compact and thin package
- SMD type
- Reflow soldering
- RoHS & High reliability package


Applications

- Touch screen for ATM
- Touch screen for Car navigation system
- Touch screen for FA equipment
- AV instrument
- Various types of disk driver

Absolute Maximum Ratings				[T _A = 25°C]	
Parameter	Symbol	Min.	Max.	Max.	
Collector-Emitter Voltage	V _{CEO}	-	35	V	
Emitter-Collector Voltage	V _{ECO}	-	6	V	
Collector Current	I _C	-	20	mA	
Collector Power Dissipation	P _C	-	75	mW	
Operating Temperature	Topr.	-20	85	°C	
Storage Temperature	Tstg.	-30	85	°C	
Soldering Temperature*1	Tsol	-	260	°C	
*1 · MAX 10e					

*1 : MAX 10s

The contents of this data sheet are subject to change without advance notice for the purpose of improvement. When using this product, would you please refer to the latest specifications.

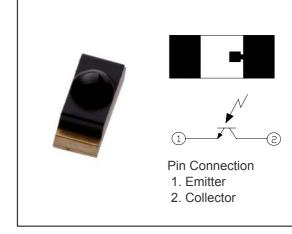





KDT-6315A


Electrical Characteristics					[T ₄	(= 25°C]
Parameter	Symbol	Conditions	Min.	Тур.	Max.	Unit
Dark Current	I _{CEO}	Ev=0, Vce=20V	-	1.0	100	nA
Collector Current	۱ _C	Ev=1000lx, VCE=5V	4.0	6.0	-	mA
Collector-Emitter Saturation Voltage	V _{CE(SAT)}	Ev=1000lx, Ic=0.8mA	-	0.15	0.4	V
Spectral Sensitivity	λ	-	700	-	1050	nm
Peak Sensitivity Wavelength	λ _P	-	-	880	-	nm
Collector-Emitter Breakdown Voltage	BVCEO	Ev=0, Ice=0.1mA	35	90	-	V
Emitter-Collector Breakdown Voltage	BVECO	Ev=0, IEC=0.01mA	6	7.5	-	V
Half Angle	Δθ	-	-	±15	-	deg

Ordering Information

Part Number	Packaging Type	Quantity
KDT-6315A	Tape and Reel	4,000

Package Outline Dimensions

(Unit : mm)

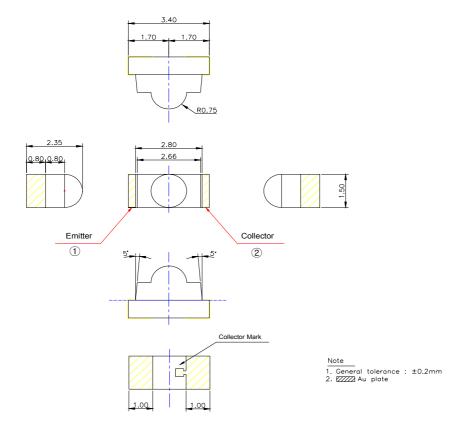

The contents of this data sheet are subject to change without advance notice for the purpose of improvement. When using this product, would you please refer to the latest specifications.

