





Chip Inductors – 0603LS (1608)

- Higher inductance values than other 0603 inductors
- Ferrite construction for high current handling
- Inductance values: 47 nH – 22 μ H; 5% and 2% tolerance

Typical L vs Frequency

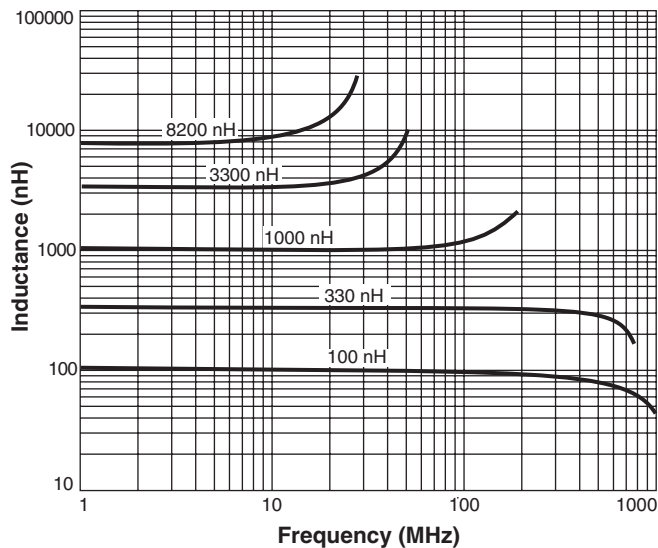

Typical Q vs Frequency

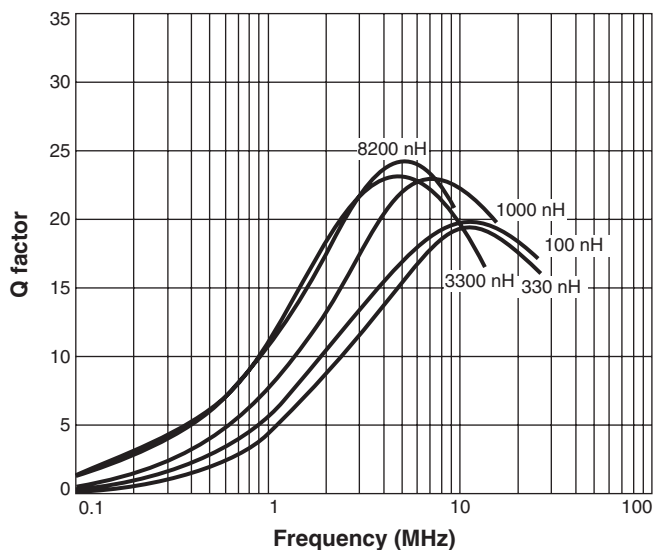

Designer's Kit C347 contains 10 each of all 5% values

Core material Ceramic/Ferrite

Environmental RoHS compliant, halogen free optional

Terminations RoHS compliant silver-palladium-platinum-glass frit. Other terminations available at additional cost.

Weight 4.8 – 6.2 mg

Ambient temperature -40°C to $+85^{\circ}\text{C}$ with Irms current, $+85^{\circ}\text{C}$ to $+100^{\circ}\text{C}$ with derated current

Storage temperature Component: -40°C to $+100^{\circ}\text{C}$.
Tape and reel packaging: -40°C to $+80^{\circ}\text{C}$

Resistance to soldering heat Max three 40 second reflows at $+260^{\circ}\text{C}$, parts cooled to room temperature between cycles

Temperature Coefficient of Inductance (TCL) $+50$ to $+150$ ppm/ $^{\circ}\text{C}$
Moisture Sensitivity Level (MSL) 1 (unlimited floor life at $<30^{\circ}\text{C}$ / 85% relative humidity)


Failures in Time (FIT) / Mean Time Between Failures (MTBF)

One per billion hours / one billion hours, calculated per Telcordia SR-332

Packaging 2000 per 7" reel. Plastic tape: 8 mm wide, 0.23 mm thick, 4 mm pocket spacing, 1.17 mm pocket depth

PCB washing Tested with pure water or alcohol only. For other solvents, see Doc787_PCB_Washing.pdf.

Irms Derating

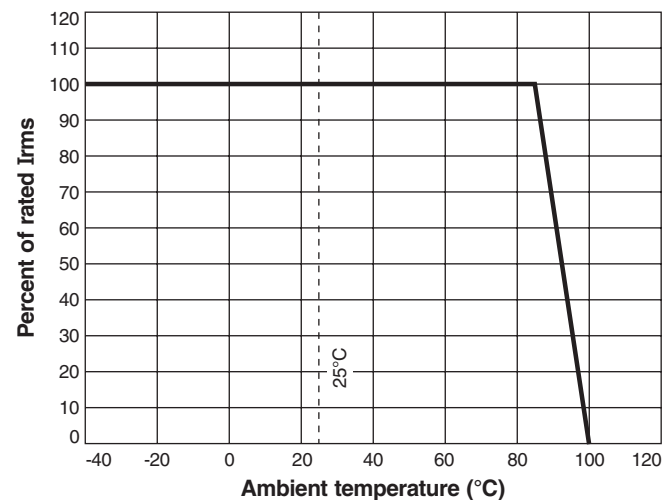



Chip Inductors – 0603LS Series

S-Parameter files

ON OUR WEB SITE

SPICE models

ON OUR WEB SITE

| Part number ¹ | Inductance ² (nH) | Percent tolerance | Q min ³ | SRF min ⁴ (MHz) | DCR max ⁵ (Ohms) | Irms ⁶ (A) | Color code | Overall width |
|--------------------------|---------------------------------|----------------------|--------------------|-------------------------------|--------------------------------|--------------------------|---------------|------------------|
| 0603LS-47NX_L_ | 47 @ 7.9 MHz | 5,2 | 12 @ 7.9 MHz | 1500 | 0.075 | 1.40 | Black | B1 |
| 0603LS-51NX_L_ | 51 @ 7.9 MHz | 5,2 | 12 @ 7.9 MHz | 1400 | 0.075 | 1.00 | Violet | B1 |
| 0603LS-72NX_L_ | 72 @ 7.9 MHz | 5,2 | 12 @ 7.9 MHz | 1400 | 0.12 | 1.40 | Brown | B1 |
| 0603LS-101X_L_ | 100 @ 7.9 MHz | 5,2 | 12 @ 7.9 MHz | 1150 | 0.13 | 1.40 | Red | B1 |
| 0603LS-121X_L_ | 120 @ 7.9 MHz | 5,2 | 12 @ 7.9 MHz | 1100 | 0.15 | 1.40 | Orange | B1 |
| 0603LS-151X_L_ | 150 @ 7.9 MHz | 5,2 | 15 @ 7.9 MHz | 1050 | 0.15 | 1.30 | Yellow | B1 |
| 0603LS-181X_L_ | 180 @ 7.9 MHz | 5,2 | 15 @ 7.9 MHz | 950 | 0.15 | 1.30 | Green | B1 |
| 0603LS-241X_L_ | 240 @ 7.9 MHz | 5,2 | 15 @ 7.9 MHz | 800 | 0.16 | 0.95 | Violet | B1 |
| 0603LS-271X_L_ | 270 @ 7.9 MHz | 5,2 | 15 @ 7.9 MHz | 775 | 0.30 | 0.71 | Gray | B1 |
| 0603LS-331X_L_ | 330 @ 7.9 MHz | 5,2 | 15 @ 7.9 MHz | 725 | 0.46 | 0.56 | White | B1 |
| 0603LS-391X_L_ | 390 @ 7.9 MHz | 5,2 | 15 @ 7.9 MHz | 620 | 0.51 | 0.50 | Black | B1 |
| 0603LS-471X_L_ | 470 @ 7.9 MHz | 5,2 | 15 @ 7.9 MHz | 540 | 0.62 | 0.42 | Brown | B1 |
| 0603LS-561X_L_ | 560 @ 7.9 MHz | 5,2 | 15 @ 7.9 MHz | 525 | 0.44 | 0.55 | Red | B1 |
| 0603LS-681X_L_ | 680 @ 7.9 MHz | 5,2 | 15 @ 7.9 MHz | 260 | 0.52 | 0.47 | Orange | B2 |
| 0603LS-781X_L_ | 780 @ 7.9 MHz | 5,2 | 15 @ 7.9 MHz | 460 | 0.83 | 0.39 | Yellow | B1 |
| 0603LS-821X_L_ | 820 @ 7.9 MHz | 5,2 | 15 @ 7.9 MHz | 410 | 0.69 | 0.40 | Green | B2 |
| 0603LS-102X_L_ | 1000 @ 7.9 MHz | 5,2 | 15 @ 7.9 MHz | 190 | 0.81 | 0.40 | Blue | B2 |
| 0603LS-122X_L_ | 1200 @ 7.9 MHz | 5,2 | 15 @ 7.9 MHz | 160 | 0.87 | 0.37 | Violet | B2 |
| 0603LS-152X_L_ | 1500 @ 7.9 MHz | 5,2 | 15 @ 7.9 MHz | 100 | 0.96 | 0.35 | Gray | B2 |
| 0603LS-182X_L_ | 1800 @ 7.9 MHz | 5,2 | 15 @ 7.9 MHz | 80 | 1.1 | 0.35 | White | B2 |
| 0603LS-222X_L_ | 2200 @ 7.9 MHz | 5,2 | 15 @ 7.9 MHz | 68 | 1.2 | 0.32 | Black | B2 |
| 0603LS-272X_L_ | 2700 @ 7.9 MHz | 5,2 | 15 @ 7.9 MHz | 60 | 1.5 | 0.28 | Brown | B2 |
| 0603LS-332X_L_ | 3300 @ 7.9 MHz | 5,2 | 15 @ 7.9 MHz | 42 | 1.5 | 0.28 | Red | B2 |
| 0603LS-392X_L_ | 3900 @ 7.9 MHz | 5,2 | 15 @ 7.9 MHz | 40 | 1.6 | 0.28 | Orange | B2 |
| 0603LS-472X_L_ | 4700 @ 7.9 MHz | 5,2 | 15 @ 7.9 MHz | 34 | 2.1 | 0.26 | Yellow | B2 |
| 0603LS-562X_L_ | 5600 @ 7.9 MHz | 5,2 | 15 @ 7.9 MHz | 32 | 2.6 | 0.24 | Green | B2 |
| 0603LS-682X_L_ | 6800 @ 7.9 MHz | 5,2 | 15 @ 7.9 MHz | 31 | 3.1 | 0.20 | Black | B2 |
| 0603LS-782X_L_ | 7800 @ 7.9 MHz | 5,2 | 15 @ 7.9 MHz | 28 | 3.5 | 0.20 | Blue | B2 |
| 0603LS-822X_L_ | 8200 @ 7.9 MHz | 5,2 | 15 @ 7.9 MHz | 26 | 3.6 | 0.19 | Violet | B2 |
| 0603LS-103X_L_ | 10,000 @ 2.5 MHz | 5,2 | 12 @ 2.5 MHz | 25 | 4.8 | 0.18 | Gray | B2 |
| 0603LS-153X_L_ | 15,000 @ 2.5 MHz | 5,2 | 20 @ 2.5 MHz | 23 | 7.1 | 0.17 | White | B2 |
| 0603LS-183X_L_ | 18,000 @ 2.5 MHz | 5,2 | 20 @ 2.5 MHz | 22 | 7.6 | 0.16 | Brown | B2 |
| 0603LS-223X_L_ | 22,000 @ 2.5 MHz | 5,2 | 22 @ 2.5 MHz | 19 | 8.81 | 0.13 | Black | B2 |

1. When ordering, specify **tolerance, termination and packaging** codes:

0603LS-822XJLC

Tolerance: G = 2% J = 5% (Table shows stock tolerances in bold.)


Termination: L = RoHS compliant silver-palladium-platinum-glass frit.

E = Halogen free component. RoHS compliant silver-palladium-platinum-glass frit terminations.
Special order: T = RoHS tin-silver-copper (95.5/4/0.5) or S = non-RoHS tin-lead (63/37).

Packaging: C = 7" machine-ready reel. EIA-481 embossed plastic tape (2000 parts per full reel).

B = Less than full reel. In tape, but not machine ready.
To have a leader and trailer added (\$25 charge), use code letter C instead.

- Inductance measured at 0.1 Vrms, using Coilcraft SMD-A fixture in Agilent/HP 4286A impedance analyzer with Coilcraft-provided correlation pieces.
 - Q measured on Agilent/HP 4395A with Agilent/HP 16193 test fixture.
 - SRF measured using Agilent/HP 8753D network analyzer with Coilcraft SMD-D test fixture.
 - DCR measured on Cambridge Technology Micro-ohmmeter.
 - Current that causes a 15°C temperature rise from 25°C ambient. Because of their open construction, these parts will not saturate.
 - Electrical specifications at 25°C.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

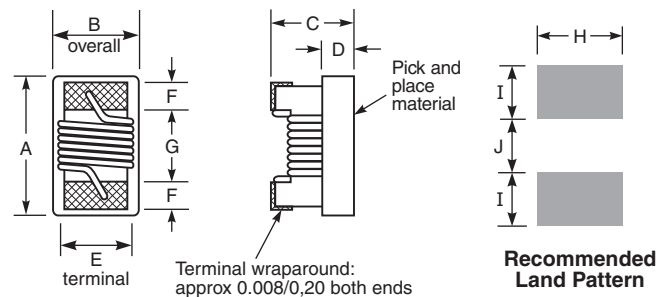

| A | B | C | D | E | F | G | H | I | J |
|-------|------|-------|-------|-------|-------|-------|-------|-------|-------|
| 0.071 | See | 0.044 | 0.015 | 0.030 | 0.013 | 0.034 | 0.040 | 0.025 | 0.025 |
| 1,80 | note | 1,12 | 0,38 | 0,76 | 0,33 | 0,86 | 1,02 | 0,64 | 0,64 |

Note: B1 = 0.040 ±0.004 in / 1,016 ±0,102 mm
B2 = 0.046 ±0.004 in / 1,169 ±0,102 mm

Height dimension (C) is before optional solder application. For maximum height dimension including solder, add 0.006 in / 0,152 mm.

Coilcraft
www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore +65-6484 8412 sales@coilcraft.com.sg

Document 264-2 Revised 01/18/12

© Coilcraft Inc. 2013

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.