
- Economical and reliable contacts are ideal for molded cases with self contained battery compartments
- "Solder tab" design for either wire lead or PC mounting
- Unique spring contacts adjust to variations in battery lengths
- Reliable spring contacts assure low contact resistance and a dependable connection
- Space saving, economical, excellent mechanical construction

Plate: .020 (.51) Steel, Nickel Plate Spring: Spring Steel, Nickel Plate




Refer to page 35 for Battery Contact Layout & Mounting Details



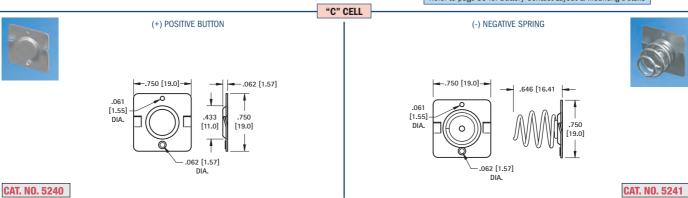


**DUAL CONTACT** 










.098 [2.5] DIA "D" CELL








CAT. NO. 5250

**DUAL CONTACT** 



CAT. NO. 5253 Left

CAT. NO. 5252 Right (Shown)

Tel (718) 956-8900 • Fax (718) 956-9040

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

**Keystone Electronics:** 

5240 5241 5242 5250 5251 5252 5253