
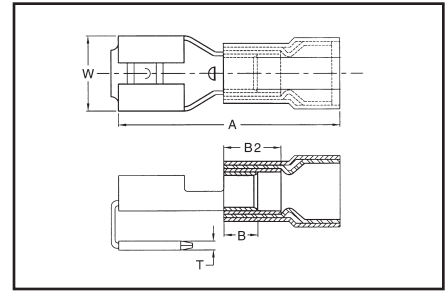


TYPES PGP, AND PGN FINGRIP™

MALE/FEMALE COMBINATION QUICK DISCONNECTS

B-38

MATERIAL: TIN-PLATED BRASS

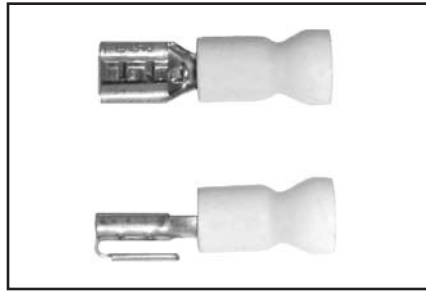

Features and Benefits

- Sleeved barrel.
- Combination connector.
 - ◇ Allows for more than one connection to a circuit.
- Funnel entry barrel opening.
 - ◇ Assures quick and easy wire insertion.
- Dimpled female socket detent.
 - ◇ Ensures firm grip.



VINYL COMBINATION DISCONNECT TERMINAL

600 VOLTS MAX. 105° C MAX.

STANDARD CATALOG NO.	STD. PKG. QTY.	WIRE RANGE	NEMA TAB SIZE	DIMENSIONS			BULK CATALOG NO.	BULK PKG. QTY.	INSTALLATION TOOL*
				A	B	W			
PGP1825X03D	100	18-22	.250 × .032	0.91	0.17	0.30	PGP1825X03B	1000	Y10D
PGP1425X03D	100	14-16	.250 × .032	0.91	0.17	0.30	PGP1425X03B	1000	

NYLON COMBINATION DISCONNECT TERMINAL

300 VOLTS MAX. 105° C MAX.

STANDARD CATALOG NO.	STD. PKG. QTY.	WIRE RANGE	NEMA TAB SIZE	DIMENSIONS			BULK CATALOG NO.	BULK PKG. QTY.	INSTALLATION TOOL*
				A	B	W			
PGN1825X03D	100	18-22	.250 × .032	0.90	0.17	0.30	PGN1825X03B	1000	Y10D
PGN1425X03D	100	14-16	.250 × .032	0.90	0.17	0.30	PGN1425X03B	1000	

* For UL listed applications consult BURNDY® factory.