

A

A

B

B

C

C

D

D

E

E

F




F

G

G

H

H

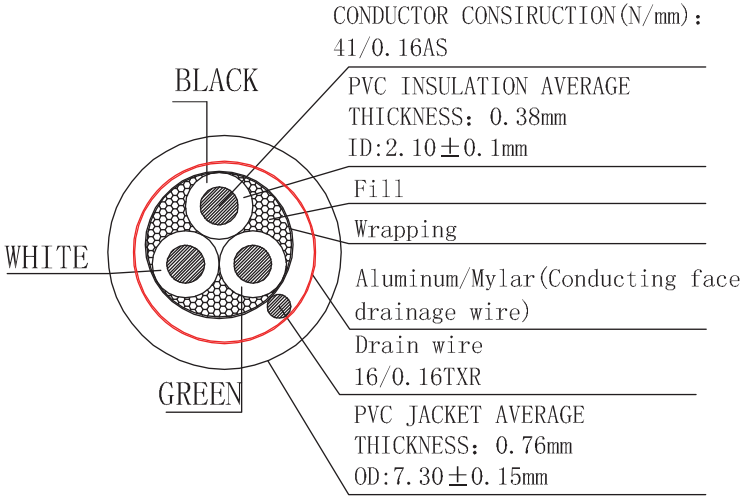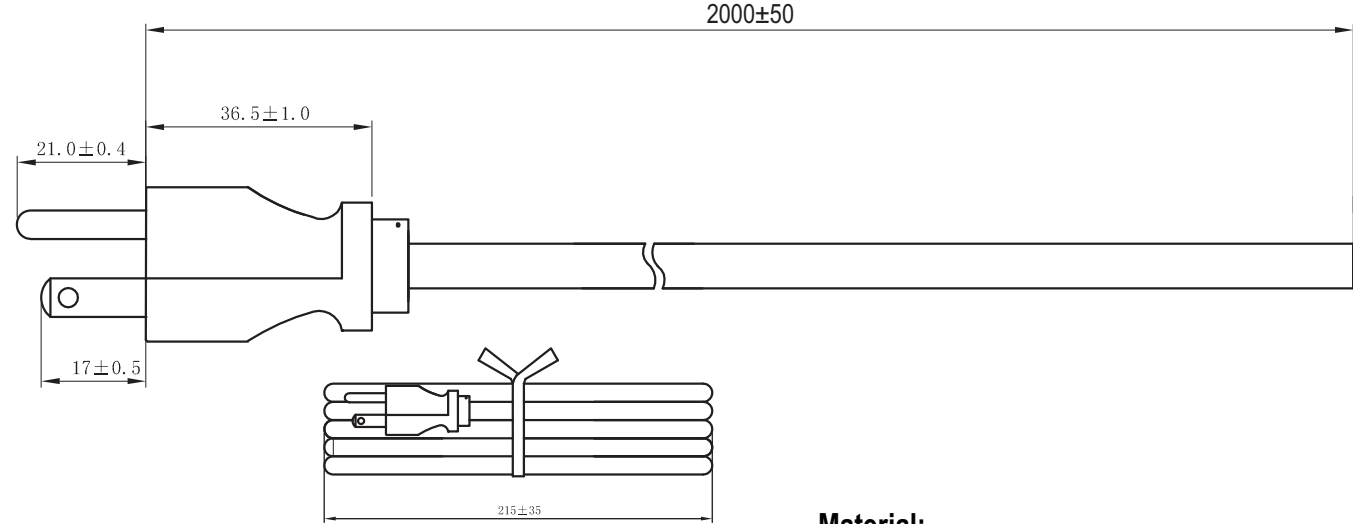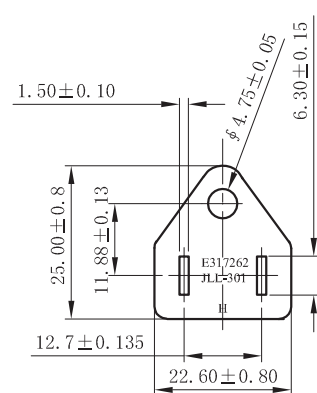

CONDUCTOR CONSTRUCTION (N/mm):
41/0.16AS

Material:

- E243711(UL) SVT 3 x 18AWG(0.824MM²)
VW-1 Shielded, 60°C 300V
- CSA 228191 SVT 3 x 18AWG(0.824MM²)
FT2 Shielded 60°C 300V -LF-
- Jacket Color: Black
- E- Green; L - Black; N - White

Electrical:

- 100% Open & Short Testing
- Insulation Resistance: 100MΩ (Min.)
- Voltage: 500V DC / 1 Min.

Unit: MM

Scale	1:1						Name
TOLERANCE					Drawn	12.27.11	Chappell
X.X	±0.40				Approved		
X.XX	±0.25						
X.XXX	±0.15						
Angle	±3°						
			Modification	Date	Name		



Item No.	AK500-OE-5-2-R	
Title	Power Cord - SVT/Open End, Shielded, 60°C, 18AWG, 2 Meters	
Drawing No.		rev00
Replace		Sheet