

6

5

4

3

2

1

MATERIAL AND FINISH:

Insulator: Impact resistance Polypropylene, black,
UL-94V-HB rated

PDSN-14A (wire leads): PVC, 26 AWG

Contact & terminals:





PDSN-14B: Brass, Nickel plated

PDSN-14C: Brass, Nickel plated


Spring: Spring Steel, Nickel plated imbedded in
Polypropylene

ENVIRONMENTAL:


Operating temperature: -5°C to +83°C

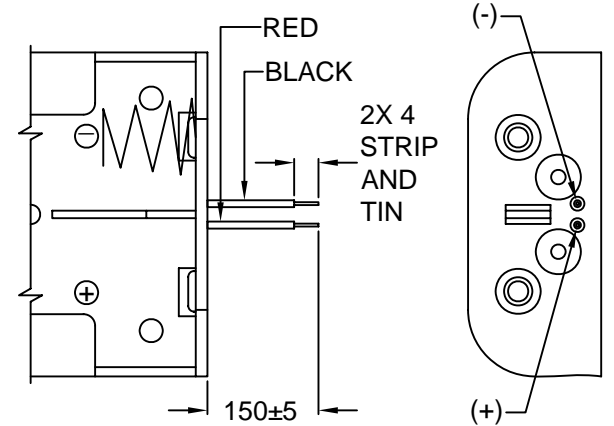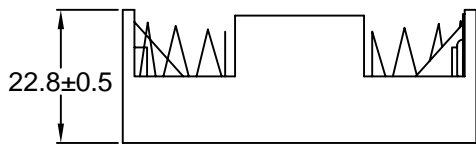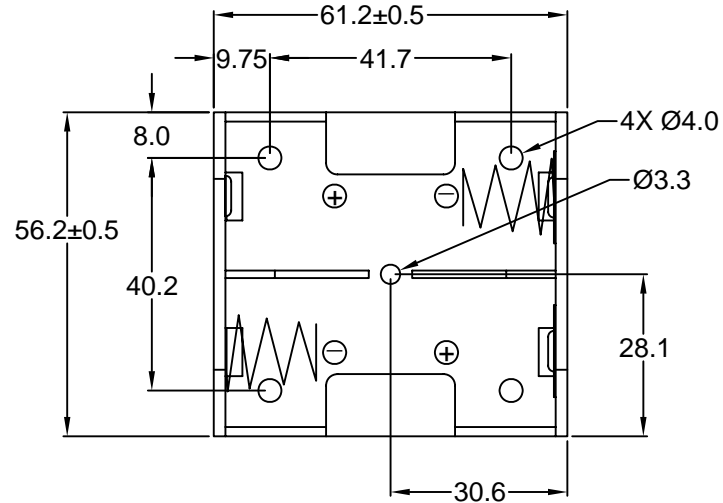

PDSN-14A WIRE LEADS

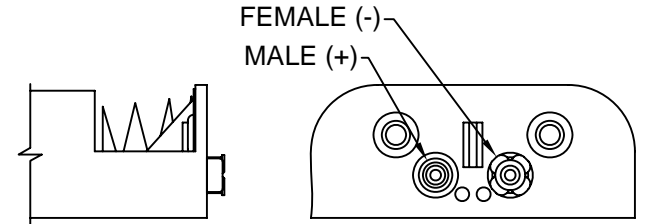

PDSN-14B SNAP TERMINAL

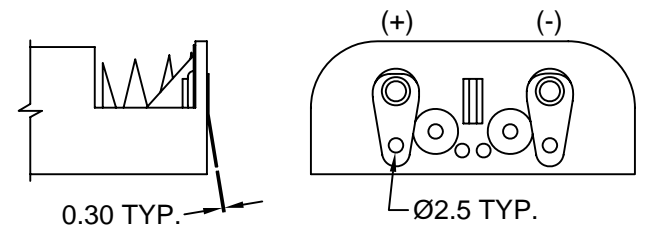

PDSN-14C SOLDER LUGS

| |
|-----------|
| REVISIONS |
| CHANGE |
| CHKG |
| CHK |
| APPR |
| REV |
| DATE |

| | | |
|-----------------------------------------|----|----------------|
| TOLERANCE UNLESS OTHERWISE SPECIFIED | | |
| X | ± | 1 |
| X.X | ± | 0.4 |
| X.XX | ± | 0.20 |
| DRAWN BY | GQ | DATE: 05/09/02 |
| CHECK BY | TD | DATE: 05/14/02 |
| APPR BY | PB | DATE: 05/14/02 |

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 2 CELL TYPE "C" BATTERY HOLDER

| | | |
|-----------------|---------|--------------------------------------------------------------------|
| PDSN-14X | | SHEET 1 of 1 |
| PART #: | SIZE: A | ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS |
| SCALE: NTS | REV: | |

6

5

4

3

2

1