


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

M39012/55B4012

REVISIONS	
ISSUE	CHANGES

5	CN 34221 D REDRAWN ME 03/23/95
6	CN 39891 C DCT 4/17/7

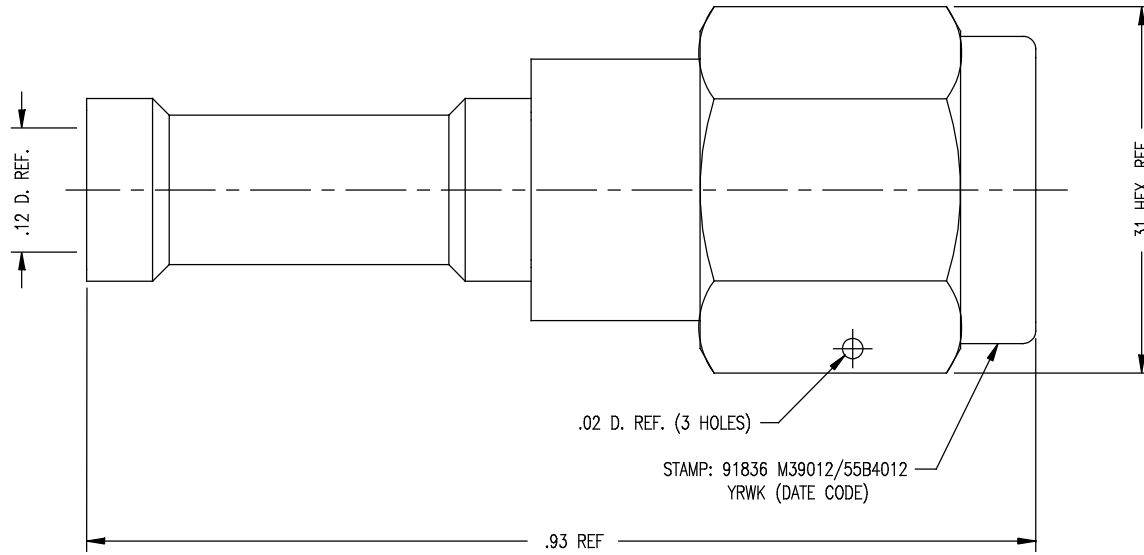

NOTES:

- FOR USE WITH M17/119-RG174 & M17/113-RG316 CABLE.
- FOR CABLING INSTRUCTIONS SEE CP-439.
- FOR CRIMPING USE DIE KTH-2081.
- INTERFACE PER MIL-STD-348, FIGURE 310-1.
- MARK PACKAGE: 875-13-18 XXXX (DATE CODE)
- MATERIALS:
INSULATOR: TEFLON, ASTM-D-4894
GASKET: SILICONE RUBBER, A-A-59588
CENTER CONTACT: BRASS, ASTM-B16
K-GRIP SLEEVE: COM. BRONZE, ASTM-B135
ALL OTHER METAL PARTS: BERYLLIUM COPPER, ASTM-B-196
- FINISHES:
ALL METAL PARTS: HARD GOLD PLATE, PER ASTM-B488
- ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
WORKING VOLTAGE: 500 VRMS
FREQUENCY RANGE: DC TO 12.4 GHz

SCALE	8:1
-------	-----

APPROX SURFACE AREA	
---------------------	--

875-13-18

USED ON	
---------	--

REF:	
------	--

PLUG, SMA

DRAWN	ME	DATE	03/23/95
-------	----	------	----------

DESIGN	MJB	DATE	03/24/95
--------	-----	------	----------

APPR.		DATE	
-------	--	------	--

GSD

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

M39012/55B4012