

### MLF1005G1R0JT000



Applications	Commercial Grade	
Feature	Shield Magnetic Shield Multilayer Ferrite Core	
Series   Type	MLF	
Status	Production	
Brand	TDK	

Size		
Length(L)	1.00mm ±0.05mm	
Width(W)	0.50mm ±0.05mm	
Thickness(T)	0.50mm ±0.05mm	
Recommended Land Pattern (A)	0.50mm Nom.	
Recommended Land Pattern (B)	0.40mm Nom.	
Recommended Land Pattern (C)	0.50mm Nom.	

Electrical Characteristics			
Inductance	1µH ±5% at 10MHz		
Rated Current (L Change) [Typ.]			
Rated Current (L Change) [Max.]			
Rated Current (Temperature Rise) [Typ.]			
Rated Current (Temperature Rise) [Max.]	40mA		
DC Resistance [Typ.]	450mΩ		
DC Resistance [Max.]	640mΩ		
Self Resonant Frequency [Min.]	120MHz		
Self Resonant Frequency [Typ.]	290MHz		
Q [Min.]	30		
Q [Typ.]	60		

Other			
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125°C		
Soldering Method	Reflow		
	Iron Soldering		
AEC-Q200	No		
Packing	Punched (Paper)Taping [180mm Reel]		
Package Quantity	10000pcs		
Weight	0.0012g		

Images are for reference only and show exemplary products.


! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.



#### MLF1005G1R0JT000



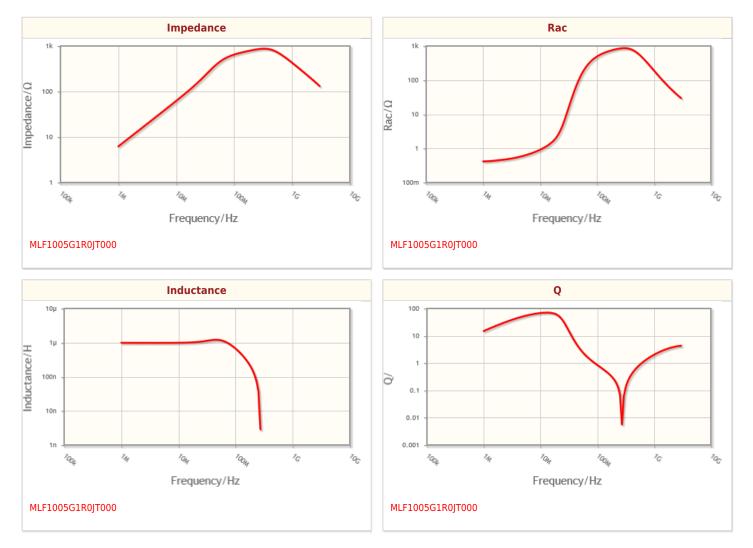

## Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.


! All specifications are subject to change without notice.



### MLF1005G1R0JT000



# Associated Images



! Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.