

4.0kV 1.0A HIGH VOLTAGE DIODES

BR04 is high reliability resin molded type high voltage diode in small size package which is sealed a multilayered mesa type silicon chip by epoxy resin.

Features

- High speed switching
- High Current
- High surge resistivity for CRT discharge
- High reliability design
- High Voltage


Applications

- X light Power supply
- Laser
- Voltage doubler circuit
- Microwave emission power

Maximum Ratings and Characteristics

- Absolute Maximum Ratings

Outline Drawings : mm

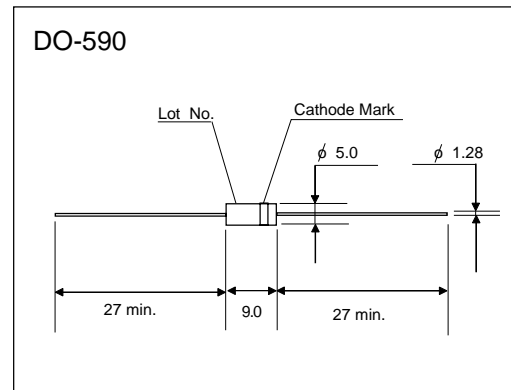

Cathode Mark

Type	Mark
BR04	

Items	Symbols	Condition	BR04	Units
Repetitive Peak Reverse Voltage	V_{RRM}		4.0	kV
Average Output Current	I_o	$T_a=25^{\circ}C$, Resistive Load	1.0	A _{peak}
Surge Current	I_{FSM}		20	A _{peak}
Junction Temperature	T_j		125	$^{\circ}C$
Allowable Operation Case Temperature	T_c		125	$^{\circ}C$
Storage Temperature	T_{stg}		-40 to +125	$^{\circ}C$

- Electrical Characteristics ($T_a=25^{\circ}C$ Unless otherwise specified)

Items	Symbols	Conditions	BR04	Units
Maximum Forward Voltage Drop	V_F	at $25^{\circ}C$, $I_F = I_{F(AV)}$	4.4	V
Maximum Reverse Current	I_{R1}	at $25^{\circ}C$, $V_R = V_{RRM}$	3.0	μA
	I_{R2}	at $100^{\circ}C$, $V_R = V_{RRM}$	30	μA
Maximum Reverse Recovery Time	T_{rr}	at $25^{\circ}C$	--	nS
Junction Capacitance	C_j	at $25^{\circ}C$, $V_R=0V$, $f=1MHz$	--	pF