


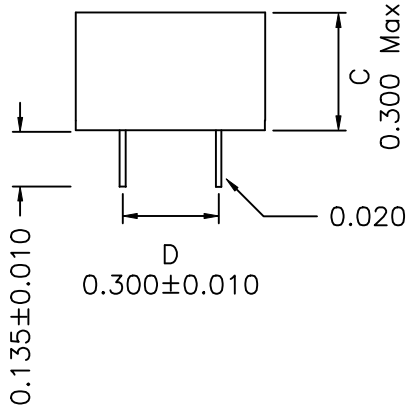


1. Mechanical Dimensions:



2. Schematic:



3. Electrical Specifications: @25°C

OCL: 256uH ±20% @10KHz 1.0V

Rated Current: 0.25Adc

DC Resistance: 2.20 Ohms Typ

E_{Top}: 33V-uS Max

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible

DOC. REV A/1

XFMRS Inc	Title: POTTED INDUCTOR		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	P/N: XF2566-HP	REV A
	DWN.	廖玉坤	Feb-7-03
	CHK.	李清儿	Feb-7-03
	APP.	BW	Feb-7-03