


36

3623

RAST 5 connectors, pitch 5.0 mm

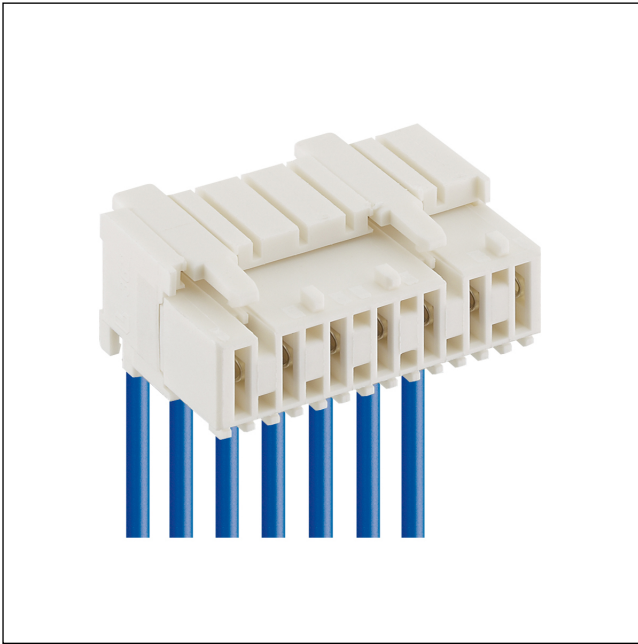

RAST 5 connector for indirect mating, insulation displacement technology (IDT), with exterior lock, consecutive placement without loss of pitch

Approvals:



- *a terminated connector
- *b cable departure 90° or 180°
- *c color keying option (FB) according to customer's specification
- *d K = keying
P = positioning
V = lock
- *e color marking blue at 3623 (M...)S01
- *f chaining of the component parts (state of delivery)

Associated products

Counterparts

☞ 3618	☞ 3618-1	☞ 3618-2
☞ 3618-3	☞ 361899	☞ 361899-1
☞ 361899-2	☞ 361899-3	☞ 3641
☞ 364197	☞ 3642	☞ 364299
☞ 3643	☞ 364399	☞ 3644
☞ 364499	☞ 3645	☞ 364599
☞ 3647	☞ 3648	☞ 3649
☞ 3671	☞ 367199	☞ 3672
☞ 367299	☞ 3673	☞ 367399
☞ 3674	☞ 367499	☞ 3676
☞ 3677	☞ 3678	☞ 3679
☞ 3680	☞ 3683	

Harnessing equipment

☞ HA3...e	☞ HA36e	☞ HA36e-CA
☞ HZ-M36	☞ HZ36-K	☞ KHP36
☞ VARICON 7000	☞ VARICON 7000-RD	

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)	Dimensions	
				A (mm)	B (mm)
3623 02	2	3600	3600	5	9.9
3623 03	3	2250	2250	10	14.9
3623 04	4	1800	1800	15	19.9
3623 05	5	1350	1350	20	24.9
3623 06	6	900	1800	25	29.9
3623 07	7	900	1800	30	34.9
3623 08	8	900	1800	35	39.9
3623 09	9	450	1800	40	44.9
3623 10	10	450	1800	45	49.9
3623 11	11	450	1800	50	54.9
3623 12	12	450	1800	55	59.9

Designation to be completed by further details (e.g. for keying, color or material options).

Packaging:

chained, in a cardboard box