

MLF1005G2R2JT000









Applications	Commercial Grade
	Shield Magnetic Shield
Feature	Multilayer Multilayer
	Ferrite Core Ferrite Core
Series Type	MLF
Status	Production
Brand	TDK



	Size	
Length(L)	1.00mm ±0.05mm	
Width(W)	0.50mm ±0.05mm	
Thickness(T)	0.50mm ±0.05mm	
Recommended Land Pattern (A)	0.50mm Nom.	
Recommended Land Pattern (B)	0.40mm Nom.	
Recommended Land Pattern (C)	0.50mm Nom.	

Electrical Characteristics			
Inductance	2.2μH ±5% at 10MHz		
Rated Current (L Change) [Typ.]			
Rated Current (L Change) [Max.]			
Rated Current (Temperature Rise) [Typ.]			
Rated Current (Temperature Rise) [Max.]	30mA		
DC Resistance [Typ.]	990mΩ		
DC Resistance [Max.]	1.3Ω		
Self Resonant Frequency [Min.]	80MHz		
Self Resonant Frequency [Typ.]	150MHz		
Q [Min.]	30		
Q [Typ.]	60		

Other			
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125°C		
Coldaring Mathad	Reflow		
Soldering Method	Iron Soldering		
AEC-Q200	No		
Packing	Punched (Paper)Taping [180mm Reel]		
Package Quantity	10000pcs		
Weight	0.0012g		

[!] Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.



MLF1005G2R2JT000













Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

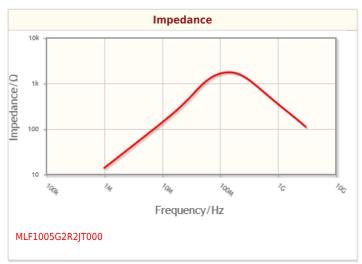

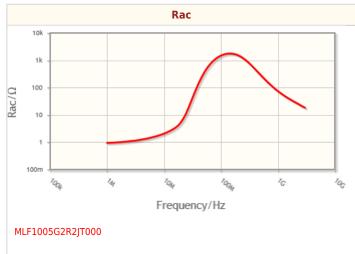

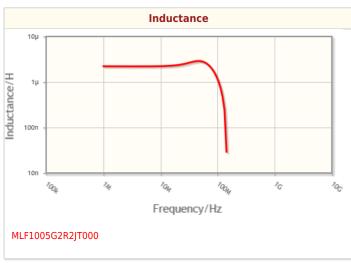

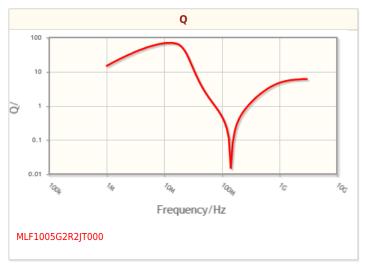

 $^{!\ \}mbox{Images}$ are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.



MLF1005G2R2JT000










Associated Images



[!] Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.