

**AWT6135** 


PCS/CDMA 3.4V/28dBm Linear Power Amplifier Module PRELIMINARY DATA SHEET - Rev 1.1

#### **FEATURES**

- InGaP HBT Technology
- High Efficiency: 40%
- Low Quiescent Current: 48 mA
- Low Leakage Current in Shutdown Mode: <1 μA</li>
- V<sub>REF</sub> = +2.8 V (+2.7 V min over temp)
- Optimized for a 50 Ω System
- Low Profile Miniature Surface Mount Package:
   1.56mm Max
- CDMA 1XRTT Compliant
- CDMA 1xEV-DO Compliant

#### **APPLICATIONS**

- PCS CDMA Wireless Handsets
- Dual Band CDMA Wireless Handsets



#### PRODUCT DESCRIPTION

The AWT6135 meets the increasing demands for higher efficiency and linearity in CDMA 1XRTT handsets. The PA module is optimized for V<sub>REF</sub> = +2.8 V, a requirement for compatibility with the Qualcomm® 6000 chipset. The device is manufactured on an advanced InGaP HBT MMIC technology offering state-of-the-art reliability, temperature stability, and

ruggedness. Selectable bias modes that optimize efficiency for different output power levels, and a shutdown mode with low leakage current, increase handset talk and standby time. The self-contained 4mm x 4mm surface mount package incorporates matching networks optimized for output power, efficiency, and linearity in a 50  $\Omega$  system.




Figure 1: Block Diagram




Figure 2: Pinout (X-ray Top View)

**Table 1: Pin Description** 

PIN	NAME	DESCRIPTION
1	Vcc	Supply Voltage
2	RFℕ	RF Input
3	GND	Ground
4	V <sub>MODE</sub>	Mode Control Voltage
5	V <sub>REF</sub>	Reference Voltage
6	GND	Ground
7	GND	Ground
8	RFout	RF Output
9	GND	Ground
10	Vcc	Supply Voltage

# **ELECTRICAL CHARACTERISTICS**

**Table 2: Absolute Minimum and Maximum Ratings** 

PARAMETER	MIN	MAX	UNIT
Supply Voltage (Vcc)	0	+5	V
Mode Control Voltage (V <sub>MODE</sub> )	0	+3.5	٧
Reference Voltage (VREF)	0	+3.5	V
RF Input Power (P <sub>N</sub> )	-	+10	dBm
Storage Temperature (Tstg)	-40	+150	°C

Stresses in excess of the absolute ratings may cause permanent damage. Functional operation is not implied under these conditions. Exposure to absolute ratings for extended periods of time may adversely affect reliability.

**Table 3: Operating Ranges** 

PARAMETER	MIN	TYP	MAX	UNIT	COMMENTS
Operating Frequency (f)	1850	1	1910	MHz	
Supply Voltage (Vcc)	+3.2	+3.4	+4.2	٧	
Reference Voltage (VREF)	+2.7 0	+2.8	+2.9 +0.5	V	PA "on" PA "shut down"
Mode Control Voltage (VMODE)	+2.5 0	+2.8	+3.1 +0.5	V	Low Bias Mode High Bias Mode
RF Output Power (Pout)	+27.5(1)	+28.0	-	dBm	
Case Temperature (Tc)	-30	-	+85	°C	

The device may be operated safely over these conditions; however, parametric performance is guaranteed only over the conditions defined in the electrical specifications.

#### Notes:

(1) For operation at  $T_c = +85$  °C and  $V_{cc} = +3.2$  V,  $P_{OUT}$  is derated by 0.5 dB.



# Table 4: Electrical Specifications (Tc = +25 °C, Vcc = +3.4 V, VREF = +2.8 V, 50 $\Omega$ system)

PARAMETER	MIN	TYP	MAX	UNIT	COMMENTS
Gain	25 22	27 25	30 27	dB	Pout = +28 dBm, V <sub>MODE</sub> = 0 V Pout = +16 dBm, V <sub>MODE</sub> = +2.8 V
Adjacent Channel Power (1) at ±1.25 kHz offset Primary Channel BW = 1.23 MHz Adjacent Channel BW = 30 kHz	1 1	-49 -51	-47 -47	dBc	Pout = +28 dBm, V <sub>MODE</sub> = 0 V Pout = +16 dBm, V <sub>MODE</sub> = +2.8 V
Adjacent Channel Power (1) at ±2.25 MHz offset Primary Channel BW = 1.23 MHz Adjacent Channel BW = 30 kHz		-60 -70	-57 -57	dBc	Pout = +28 dBm, VMODE = 0 V Pout = +16 dBm, VMODE = +2.8 V
Power-Added Efficiency (1)	37 8	39.5 9	- -	%	Pout = +28 dBm, V <sub>MODE</sub> = 0 V Pout = +16 dBm, V <sub>MODE</sub> = +2.8 V
Quiescent Current (Icq)	1	48	60	mA	V <sub>MODE</sub> = +2.8 V
Reference Current	1	3.5	5	mA	through V <sub>REF</sub> pin
Mode Control Current	1	0.3	0.5	mA	through V <sub>MODE</sub> pin, V <sub>MODE</sub> = +2.8 V
Leakage Current	-	<1	5	μΑ	$V_{\text{CC}} = +4.2 \text{ V},  V_{\text{REF}} = 0 \text{ V}$ $V_{\text{MODE}} = 0 \text{ V}$
Noise in Receive Band 1930 MHz to 1990 MHz	-	-137 -140	-135 -138	dBm/Hz	Pout = +28 dBm, V <sub>MODE</sub> = 0 V, Pout = +16 dBm, V <sub>MODE</sub> = +2.8 V
Harmonics 2fo 3fo, 4fo		-40 -55	-30 -30	dBc	
Input Impedance	-	-	2:1	VSWR	
Spurious Output Level 65 dBc Out-of-band load VS Applies over all volta		Pour ≤ +28 dBm In-band load VSWR < 8:1 Out-of-band load VSWR < 8:1 Applies over all voltage and temperature operating ranges			
Load mismatch stress with no permanent degradation or failure	8:1	-	-	VSWR	Vcc = +5.0 V, P <sub>IN</sub> = +5 dBm Applies over full operating temperature range

Notes:

(1) ACPR and PAE limits apply to middle frequency only.



#### APPLICATION INFORMATION

To ensure proper performance, refer to all related Application Notes on the ANADIGICS web site: http://www.anadigics.com

#### **Shutdown Mode**


The power amplifier may be placed in a shutdown mode by applying logic low levels (see Operating Ranges table) to both the V<sub>REF</sub> and V<sub>MODE</sub> voltages.

#### **Bias Modes**

The power amplifier may be placed in either a Low Bias mode or a High Bias mode by applying the appropriate logic level (see Operating Ranges table) to the  $V_{\text{MODE}}$  voltage. The Bias Control table lists the recommended modes of operation for various applications.


Table 5: Bias Control

APPLICATION	Pout LEVELS	BIAS MODE	V <sub>REF</sub>	V <sub>MODE</sub>
CDMA - low power	≤+16dBm	Low	+2.8 V	+2.8 V
CDMA - high power	>+16 dBm	High	+2.8 V	0 V
Shutdown	-	Shutdown	0 V	0 V

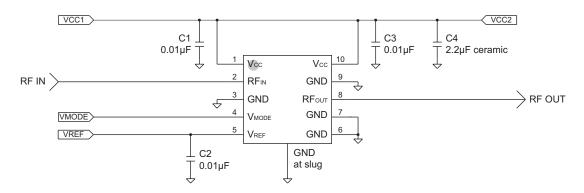

**Figure 3: Application Circuit Schematic** 

#### **PACKAGE OUTLINE**

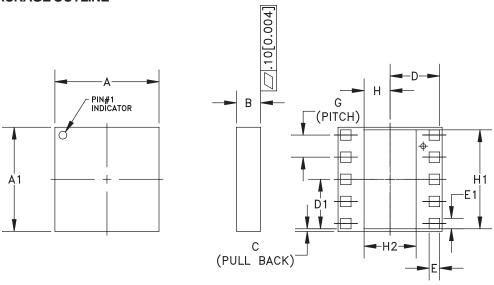

SYMBOL	MI	LLIMETER	RS		NOTE		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.	
Α	3.88	4.00	4.12	0.152	0.157	0.162	-
A1	3.88	4.00	4.12	0.152	0.157	0.162	-
В	1.26	1.41	1.56	0.049	0.055	0.061	-
С	_	0.10	-	_	0.004	_	-
D	_	1.90	-	_	0.075	-	-
D1	_	1.90	-	-	0.075	ı	-
Ε	0.35	0.40	0.45	0.013	0.015	0.017	-
E1	0.35	0.40	0.45	0.013	0.015	0.017	-
G	0.85 BSC			0	.033 BS	С	-
Η	_	1.00	-	_	0.039	-	-
H1	-	3.80	-	-	0.149	-	-
H2	_	2.00	-	_	0.078	_	-

#### NOTES:

- 1. CONTROLLING DIMENSIONS: MILLIMETERS
  2. UNLESS SPECIFIED TOLERANCE=±0.076[0.003].

Figure 4: M7 Package Outline - 10 Pin 4mm x 4mm Surface Mount Module



## NOTES:

1. ANADIGICS LOGO SIZE: X=0.040±0.010 Y=0.048±0.010

2. PART # AWT6135

3. YEAR AND WORK WEEK: YYWW: YY = YEAR, WW = WORK WEEK

4. LOT - WAFER I.D.: LLLLL - SS = WAFER/LOT I.D.5. PIN 1 INDICATOR: MOLD NOTCH -or- INK DOT

6. BOM # BBB


7. COUNTRY CODE: CCCCCC

ELITE

TYPE : SIZE : AS LARGE AS POSSIBLE LASER MARKED

Figure 5: Branding Specification

# **COMPONENT PACKAGING**

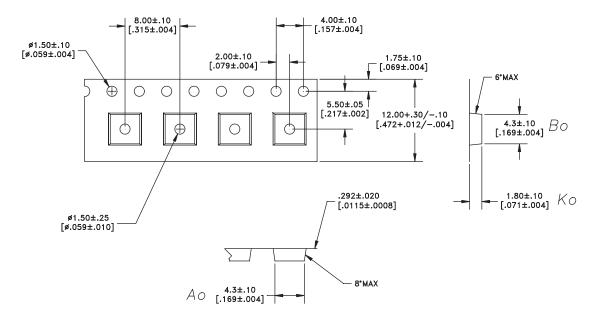

DIMENSIONS ARE IN MILLIMETERS [INCHES]
STANDARD TOLERANCES

Figure 6: Tape & Reel Packaging

Table 6: Tape & Reel Dimensions

PACKAGE TYPE	TAPE WIDTH	APE WIDTH POCKET PITCH		MAX REEL DIA
4mm X 4mm	4mm X 4mm 12mm		2500	13"

#### ORDERING INFORMATION

ORDER NUMBER	NUMBER TEMPERATURE RANGE D		DER NUMBER   '   '		COMPONENT PACKAGING
AWT6135M7P8	-30 °C to +110 °C	10 Pin 4mm x 4mm Surface Mount Module	Tape and Reel, 2500 pieces per Reel		



# ANADIGICS, Inc.

141 Mount Bethel Road Warren, New Jersey 07059, U.S.A.

Tel: +1 (908) 668-5000 Fax: +1 (908) 668-5132

URL: http://www.anadigics.com E-mail: Mktg@anadigics.com

### **IMPORTANT NOTICE**

ANADIGICS, Inc. reserves the right to make changes to its products or to discontinue any product at any time without notice. The product specifications contained in Advanced Product Information sheets and Preliminary Data Sheets are subject to change prior to a product's formal introduction. Information in Data Sheets have been carefully checked and are assumed to be reliable; however, ANADIGICS assumes no responsibilities for inaccuracies. ANADIGICS strongly urges customers to verify that the information they are using is current before placing orders.

#### WARNING

ANADIGICS products are not intended for use in life support appliances, devices or systems. Use of an ANADIGICS product in any such application without written consent is prohibited.

