

SERVIS Cat5 Extender series


Cat5 Extender Unit - NC14003-B713



Fujitsu Components' Cat5 Extender DA enables the user to operate the computer, its console (keyboard, mouse, and monitor), and audio port at intervals, up to a distance of 200m. This unit also comes with a RGB color quality adjustment circuit.

■ FEATURES

- Operate computer and console/audio remotely, up to 200m at XGA.
- Remote control system uses popular Cat5E UTP cable to provide the bandwidth for high quality video and audio.
- Supports high display resolution: XGA, SXGA, and UXGA.
- Superior display: RGB color quality adjustment circuits are installed within unit.
- The unit supports various input device interfaces for computer : PS/2, USB, and SUN I/O
- The unit supports 2 input device interfaces for console : PS/2 and SUN I/O
- It is possible to control multiple servers remotely, with the combination of Fujitsu's KVM series.
- Superior Stereo Sound Control:
 - Stereo audio is digitized to achieve clear sound transmission
 - Audio bandwidth up to 20KHz
 - 16-bit digital audio converter provides CD quality sound remotely using 44.1KHz sampling rate

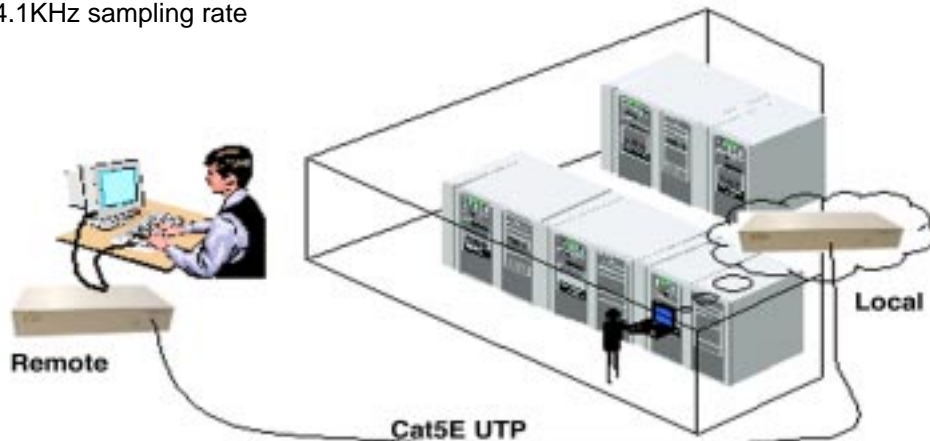

Cat5 Extender

■ SPECIFICATIONS

Model		Servis™ Cat5 Extender DA		
Part Number		NC14004-B713 *		
Unit		Local Extender (Transmitter)	Remote Extender (Receiver)	
LED Display	Power (green)	1	1	
Console		Keyboard	PS/2 interface: Mini-Din 6pin, Female x1 Sun I/O interface: Mini-Din 8-pin, Female x1	
		Mouse	PS/2 interface: Mini-Din 6pin, Female x1	
		Audio	Stereo mini Jack: Audio Line out x1 Stereo mini Jack: Audio Line out x1 *	
Server / PC port	Interface for Server/PC side	Keyboard Interface	PS/2, USB, Sun-USB, Sun I/O	-
		Mouse Interface	PS/2, USB, Sun-USB, Sun I/O	-
		Monitor	Analog RGB	-
		Audio	Audio line out	-
	Connector for Unit side	Keyboard/Mouse/Monitor	Mini D-SUB 15 Pin female	-
		Audio	Stereo mini Jack: Audio Line out x1	-
Monitor	Resolution, refresh rate		1600 x 1200 (max.), 75Hz	
	Signal supported		Separate Sync	
Connection between Transmitter and Receiver Units	Data Transmission		Fujitsu Components Limited unique data transmission	
	Console Port		RJ45 (Cat5) 8 Line x1	
	Audio Port		RJ45 (Cat5) 8 Line x1	
	Cable		Cat5E UTP cable	
	Distance (by monitor resolution)	UXGA:1600 x 1200	30-50m	
		SGXA: 1280 x 1024	30-150m	
XGA: 1024x 768		30-200m		
Power Supply / Power Consumption		5VDC / 0.7A (DC) max.	5VDC / 0.8A (DC) max.	
Operating Environment Temperature/Humidity		0 to 40° C, 10 to 80RH (must be free of condensation)		
Storage Temperature		-20 to 60° C		
Composition		Painted (ivory) metal case		
Size (W x D x H)		220 x 120 x 42 mm	220 x 127 x 42 mm	
Included accessories		2 Adapters x (AC power cable not included, must be purchased separately for specific country support) 1 User manual / 4 Masking stickers / 4 Rubber feet / 2 Cable clamp / 1 Adjustment stylus / 2 Ferrite core		
Agency Approval		C-UL, FCC Class A, CE		

*Please contact our sales office for special model with XLR connectors.

Cat5 Extender

Note: Terminology in documentation may vary slightly as below:

Local Extender/ Extender-T = Transmitter


Remote Extender / Extender-R = Receiver

■ OPTIONAL ACCESSORIES


Item	Part Number	Remark	
Optional AC power cables	NC14004-B077	US Version	
Optional Interface cables	PS/2	NC14000-B002/ NC14000-B602	1.8m cable
		NC14000-B003/ NC14000-B603	3.0m cable
		NC14000-B005/ NC14000-B605	5.0m cable
	USB cable (effective both USB: PC /Sun)	NC14000-B102	1.8m cable
		NC14000-B103	3.0m cable
		NC14000-B105	5.0m cable
	IBM x330, x335 series	NC14000-B502	1.0m cable
		NC14000-B503	3.0m cable
Cat5E UTP cables	Optional Cat5 Extender remote cables	NC14000-B703	Cat5E UTP cable 30m
		NC14000-B705	Cat5E UTP cable 50m
		NC14000-B710	Cat5E UTP cable 100m
		NC14000-B715	Cat5E UTP cable 150m
		NC14000-B720	Cat5E UTP cable 200m
Optional Audio cable	NC14004-B722	1.8m stereo audio mini-jack	
Optional Rack Mount Panel	NC14004-B323	Cat5 Extender Mount Kit	

Cat5 Extender

■ EXAMPLES FOR CONNECTION

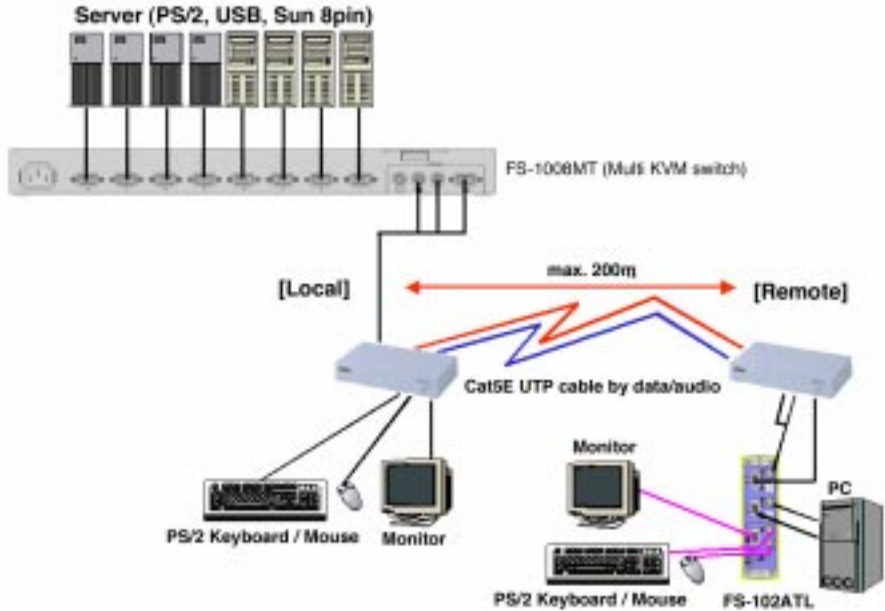

■ EXAMPLES FOR APPLICATION

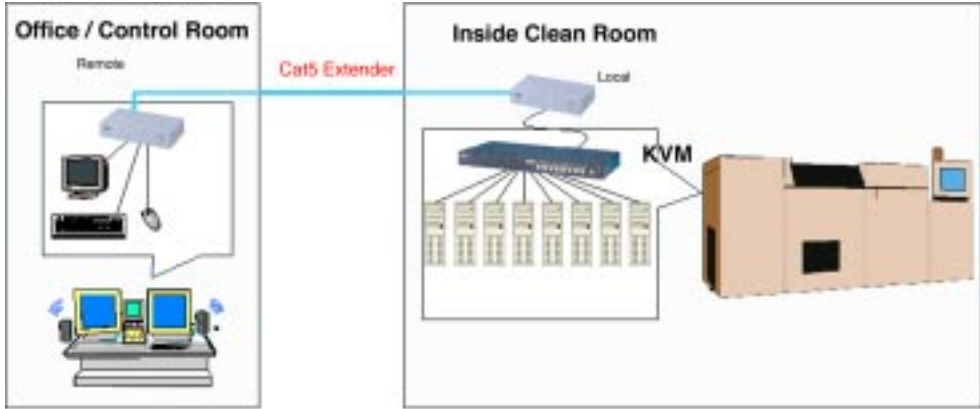

<p>Fujitsu Components International Headquarter Offices</p>	<p>Japan Fujitsu Component Limited Gotanda-Chuo Building 3-5, Higashigotanda 2-chome, Shinagawa-ku Tokyo 141, Japan Tel: (81-3) 5449-7010 Fax: (81-3) 5449-2626 Email: promothq@ft.ed.fujitsu.com Web: www.fcl.fujitsu.com</p>	<p>Europe Fujitsu Components Europe B.V. Diamantlaan 25 2132 WV Hoofddorp Netherlands Tel: (31-23) 5560910 Fax: (31-23) 5560950 Email: info@fceu.fujitsu.com Web: www.fceu.fujitsu.com</p>
	<p>North and South America Fujitsu Components America, Inc. 250 E. Caribbean Drive Sunnyvale, CA 94089 U.S.A. Tel: (1-408) 745-4900 Fax: (1-408) 745-4970 Email: marcom@fcai.fujitsu.com Web: www.fcai.fujitsu.com</p>	<p>Asia Pacific Fujitsu Components Asia Ltd. 102E Pasir Panjang Road #04-01 Citilink Warehouse Complex Singapore 118529 Tel: (65) 6375-8560 Fax: (65) 6273-3021 Email: fcal@fcal.fujitsu.com www.fcal.fujitsu.com</p>