



# Cascadable Amplifier 10 to 500 MHz

PA512 / SPA512

V1

#### **Features**

- HIGH POWER OUTPUT: +27.5 dBm (TYP.)
- HIGH THIRD ORDER I.P.: +39 DBm (TYP.)
- MODERTE NOISE FIGURE: 5.2 dB (TYP.)
- GaAs FET AMPLIFIER


#### **Description**

The PA512 0.5 watt RF power amplifier is a discrete hybrid design, which uses thin film manufacturing processes for accurate performance and high reliability. This 2 stage GaAs FET transistor design uses a feedback loop for flat broadband performance. An active DC biasing network insures temperature-stable performance. MIL-STD-883 environmental screening is available.

#### **Ordering Information**

Part Number	Package
PA512	TO-8
MAAM-007502-SPA512	Surface Mount
MAAM-007502-CPA512	SMA Connectorized

#### **Product Image**



## Electrical Specifications: $Z_0 = 50\Omega$ , $V_{CC} = +15 V_{DC}$

Developeday	Units	Typical	Guaranteed	
Parameter		25°C	0° to 50°C	-54° to +85°C*
Frequency	MHz	10-700	10-500	10-500
Small Signal Gain (min)	dB	18.0	16.0	15.0
Gain Flatness (max)	dB	±0.3	±0.7	±1.0
Reverse Isolation	dB	24		
Noise Figure (max)	dB	5.2	6.0	6.5
Power Output @ 1 dB comp. (min)	dBm	27.5	26.0	25.5
IP3	dBm	+33		
IP2	dBm	+45		
Second Order Harmonic IP	dBm	+50		
VSWR Input / Output (max)		1.4:1 / 2.0:1	1.8:1 / 2.2:1	2.0:1 / 2.3:1
DC Current @ 15 Volts (max)	mA	200	210	220

### **Absolute Maximum Ratings**

Parameter	Absolute Maximum			
Storage Temperature	-62°C to +150°C			
Case Temperature	+85°C			
DC Voltage	+17 V			
Continuous Input Power	+17 dBm			
Short Term Input power (1 minute max.)	100 mW			
Peak Power (3 µsec max.)	0.5 W			
"S" Series Burn-In Temperature (case)	+85°C			

### Thermal Data: $V_{CC} = +15 V_{DC}$

Parameter	Rating
Thermal Resistance $\theta_{jc}$	°C/W
Transistor Power Dissipation P <sub>d</sub>	W
Junction Temperature Rise Above Case T <sub>jc</sub>	°C

<sup>\*</sup> Over temperature performance limits for part number CPA512, guaranteed from 0°C to +50°C only.

information.

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or

<sup>•</sup> North America Tel: 800.366.2266 / Fax: 978.366.2266

<sup>•</sup> Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300

Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298







## **Cascadable Amplifier** 10 to 500 MHz

PA512 / SPA512


#### Typical Performance Curves at +25°C

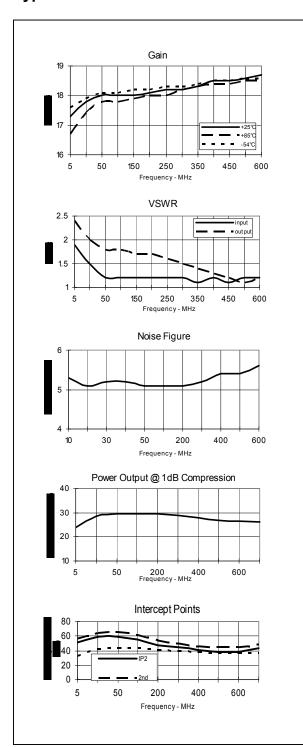


## Outline Drawing: TO-8 \*

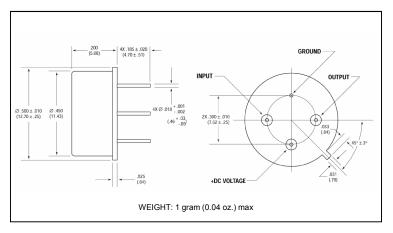

### Outline Drawing: Surface Mount

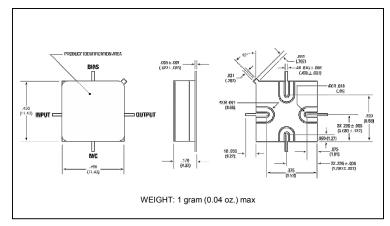

## Outline Drawing: SMA Connectorized \*

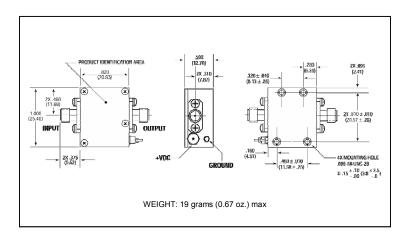

- \* Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.
  - North America Tel: 800.366.2266 / Fax: 978.366.2266 • Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300

  - Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298