ALPHA & OMEGA SEMICONDUCTOR, LTD

# AO8846

## Common-Drain Dual N-Channel Enhancement Mode Field Effect Transistor

### General Description

The AO8846 uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge. It is ESD protected. This device is suitable for use as a uni-directional or bi-directional load switch, facilitated by its common-drain configuration. *Standard Product AO8846 is Pb-free (meets ROHS & Sony 259 specifications).*

### Features

$V_{DS}$ = 20V
$I_D$ = 7.0A ($V_{GS}$ = 4.5V)
$R_{DS(ON)}$ < 20mΩ ($V_{GS}$ = 4.5V)
$R_{DS(ON)}$ < 20mΩ ($V_{GS}$ = 4.0V)
$R_{DS(ON)}$ < 21mΩ ($V_{GS}$ = 3.1V)
$R_{DS(ON)}$ < 22mΩ ($V_{GS}$ = 2.5V)
$R_{DS(ON)}$ < 27mΩ ($V_{GS}$ = 1.8V)

**TSSOP-8**
**Top View**







**Absolute Maximum Ratings $T_A$=25°C unless otherwise noted**

| Parameter | | Symbol | 10 Sec | Steady State | Units |
|---|---|---|---|---|---|
| Drain-Source Voltage | | $V_{DS}$ | 20 | | V |
| Gate-Source Voltage | | $V_{GS}$ | ±8 | | V |
| Continuous Drain Current [A] | $T_A$=25°C | $I_D$ | 7 | 5.7 | A |
| | $T_A$=70°C | | 5.7 | 4.8 | |
| Pulsed Drain Current [B] | | $I_{DM}$ | 25 | | |
| Power Dissipation [A] | $T_A$=25°C | $P_D$ | 1.5 | 1.0 | W |
| | $T_A$=70°C | | 1.0 | 0.7 | |
| Junction and Storage Temperature Range | | $T_J$, $T_{STG}$ | -55 to 150 | | °C |

**Thermal Characteristics**

| Parameter | | Symbol | Typ | Max | Units |
|---|---|---|---|---|---|
| Maximum Junction-to-Ambient [A] | t ≤ 10s | $R_{\theta JA}$ | 64 | 83 | °C/W |
| Maximum Junction-to-Ambient [A] | Steady State | | 89 | 120 | °C/W |
| Maximum Junction-to-Lead [C] | Steady State | $R_{\theta JL}$ | 53 | 70 | °C/W |

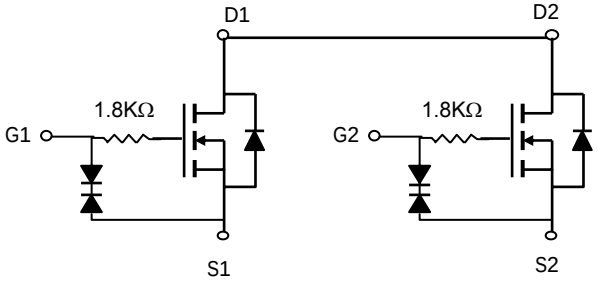**Electrical Characteristics ($T_J$=25°C unless otherwise noted)**

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|---|---|---|---|---|---|---|
| **STATIC PARAMETERS** | | | | | | |
| $BV_{DSS}$ | Drain-Source Breakdown Voltage | $I_D$ = 250µA, $V_{GS}$ = 0V | 20 | | | V |
| $I_{DSS}$ | Zero Gate Voltage Drain Current | $V_{DS}$ = 20V, $V_{GS}$ = 0V | | | 1 | µA |
| | | $T_J$ = 55°C | | | 5 | |
| $I_{GSS}$ | Gate-Body leakage current | $V_{DS}$ = 0V, $V_{GS}$ = ±8V | | | ±10 | µA |
| $V_{GS(th)}$ | Gate Threshold Voltage | $V_{DS}$ = $V_{GS}$ $I_D$ = 250µA | 0.5 | 0.7 | 1 | V |
| $I_{D(ON)}$ | On state drain current | $V_{GS}$ = 4.5V, $V_{DS}$ = 5V | 25 | | | A |
| $R_{DS(ON)}$ | Static Drain-Source On-Resistance | $V_{GS}$ = 4.5V, $I_D$ = 7.0A | 12 | 16 | 20 | mΩ |
| | | $T_J$=125°C | 16 | 22 | 28 | |
| | | $V_{GS}$ = 4.0V, $I_D$ = 7.0A | 12 | 16.2 | 20 | |
| | | $V_{GS}$ = 3.1V, $I_D$ = 6.5A | 13 | 17 | 21 | |
| | | $V_{GS}$ = 2.5V, $I_D$ = 6.5A | 14 | 18 | 22 | |
| | | $V_{GS}$ = 1.8V, $I_D$ = 6.0A | 15 | 21 | 27 | |
| $g_{FS}$ | Forward Transconductance | $V_{DS}$ = 4.5V, $I_D$ = 7.0A | | 34 | | S |
| $V_{SD}$ | Diode Forward Voltage | $I_S$ = 1A,$V_{GS}$ = 0V | | 0.62 | 1 | V |
| $I_S$ | Maximum Body-Diode Continuous Current | | | | 1.5 | A |
| **DYNAMIC PARAMETERS** | | | | | | |
| $C_{iss}$ | Input Capacitance | $V_{GS}$=0V, $V_{DS}$=10V, f=1MHz | | 1295 | 1650 | pF |
| $C_{oss}$ | Output Capacitance | | | 160 | | pF |
| $C_{rss}$ | Reverse Transfer Capacitance | | | 87 | | pF |
| $R_g$ | Gate resistance | $V_{GS}$=0V, $V_{DS}$=0V, f=1MHz | | 1.8 | | kΩ |
| **SWITCHING PARAMETERS** | | | | | | |
| $Q_g$ | Total Gate Charge | $V_{GS}$= 4.5V, $V_{DS}$= 10V, $I_D$= 7A | | 10 | 13 | nC |
| $Q_{gs}$ | Gate Source Charge | | | 4.2 | | nC |
| $Q_{gd}$ | Gate Drain Charge | | | 2.6 | | nC |
| $t_{D(on)}$ | Turn-On DelayTime | $V_{GS}$=4.5V, $V_{DS}$=10V, $R_L$=1.4Ω, $R_{GEN}$=3Ω | | 6.4 | | ns |
| $t_r$ | Turn-On Rise Time | | | 12.4 | | ns |
| $t_{D(off)}$ | Turn-Off DelayTime | | | 42 | | ns |
| $t_f$ | Turn-Off Fall Time | | | 15 | | ns |
| $t_{rr}$ | Body Diode Reverse Recovery Time | $I_F$=7A, dI/dt=100A/µs, $V_{GS}$=-9V | | 31 | 41 | ns |
| $Q_{rr}$ | Body Diode Reverse Recovery Charge | $I_F$=7A, dI/dt=100A/µs, $V_{GS}$=-9V | | 6.8 | | nC |

A: The value of $R_{\theta JA}$ is measured with the device mounted on 1in $^2$ FR-4 board with 2oz. Copper, in a still air environment with $T_A$ = 25°C. The value in any given application depends on the user's specific board design. The current rating is based on the t ≤ 10s thermal resistance rating.

B: Repetitive rating, pulse width limited by junction temperature.

C. The $R_{\theta JA}$ is the sum of the thermal impedence from junction to lead $R_{\theta JL}$ and lead to ambient.

D. The static characteristics in Figures 1 to 6 are obtained using < 300µs pulses, duty cycle 0.5% max.

E. These tests are performed with the device mounted on 1 in $^2$ FR-4 board with 2oz. Copper, in a still air environment with $T_A$=25°C. The SOA curve provides a single pulse rating.

Rev0 August 2007

## TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

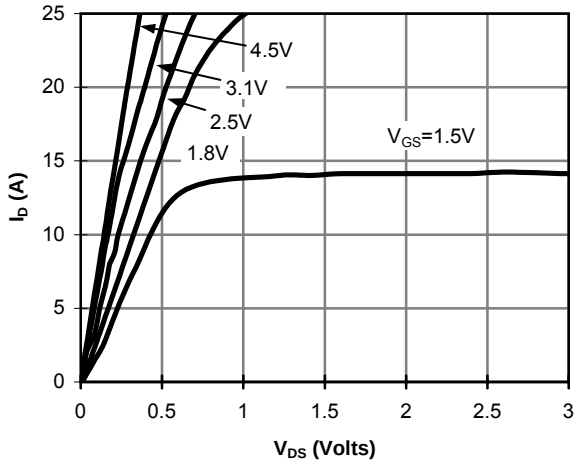


**Figure 1: On-Region Characteristics**

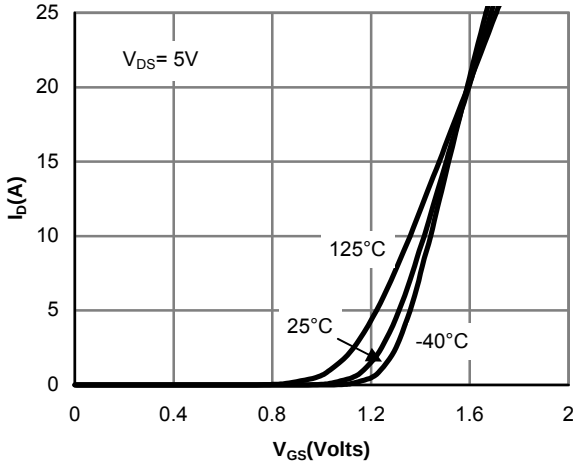


**Figure 2: Transfer Characteristics**

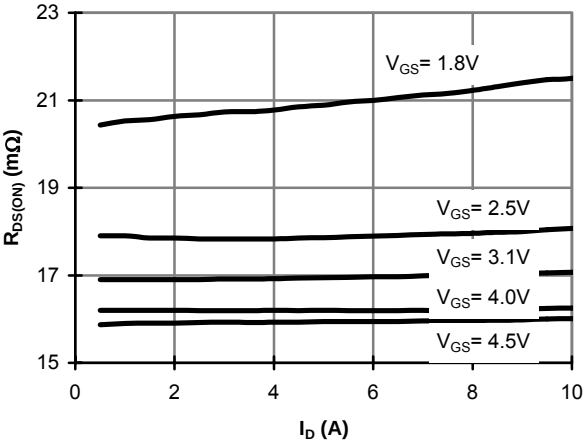


**Figure 3: On-Resistance vs. Drain Current and Gate Voltage**

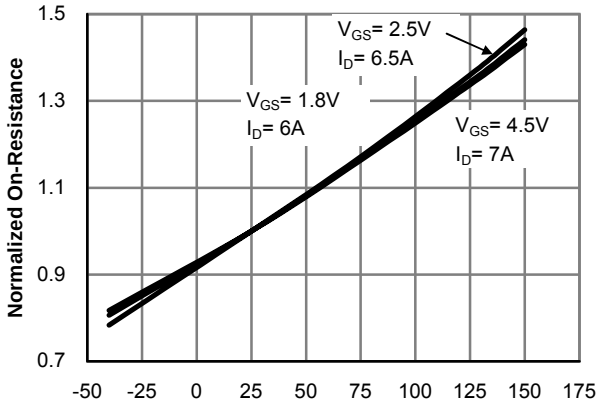


**Figure 4: On-Resistance vs. Junction Temperature**

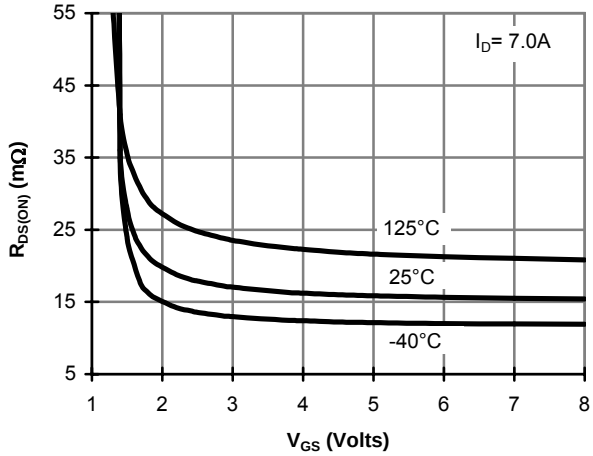


**Figure 5: On-Resistance vs. Gate-Source Voltage**

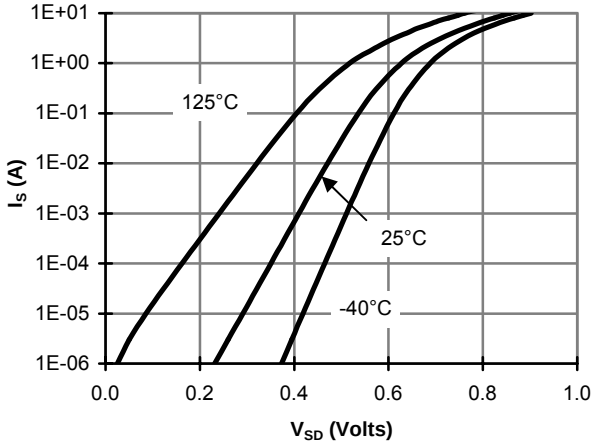


**Figure 6: Body-Diode Characteristics**

## TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

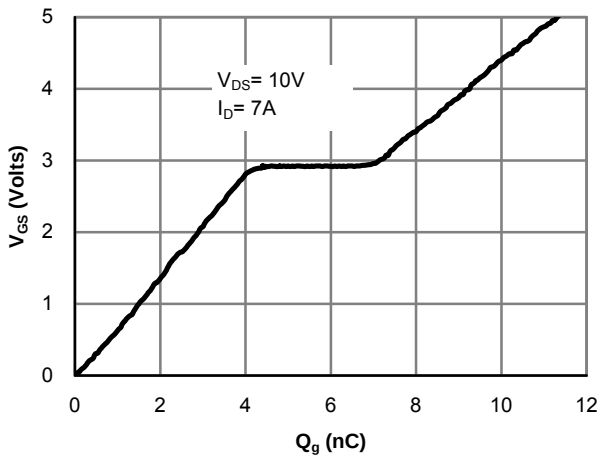


**Figure 7: Gate-Charge Characteristics**

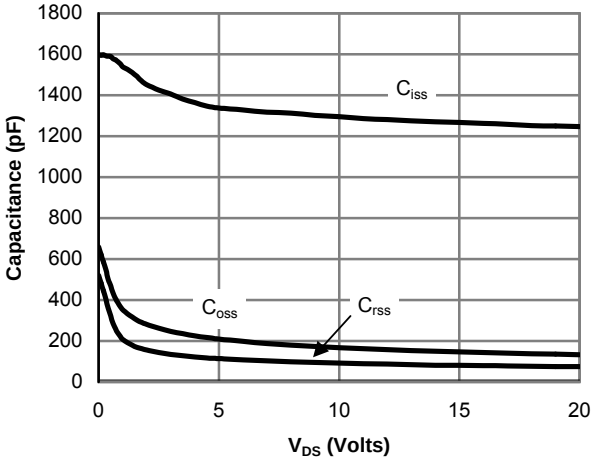


**Figure 8: Capacitance Characteristics**

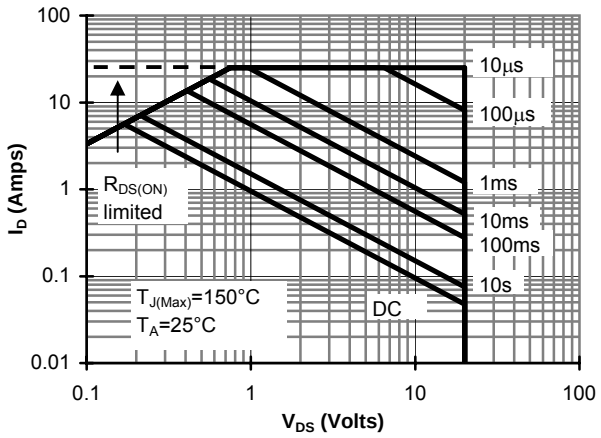


**Figure 9: Maximum Forward Biased Safe Operating Area (Note E)**

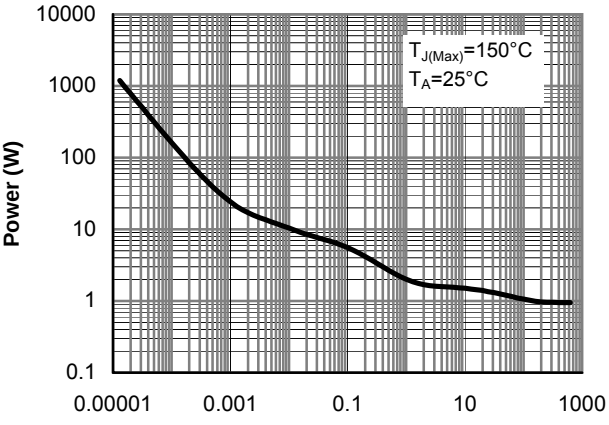


**Figure 10: Single Pulse Power Rating Junction-to-Ambient (Note E)**

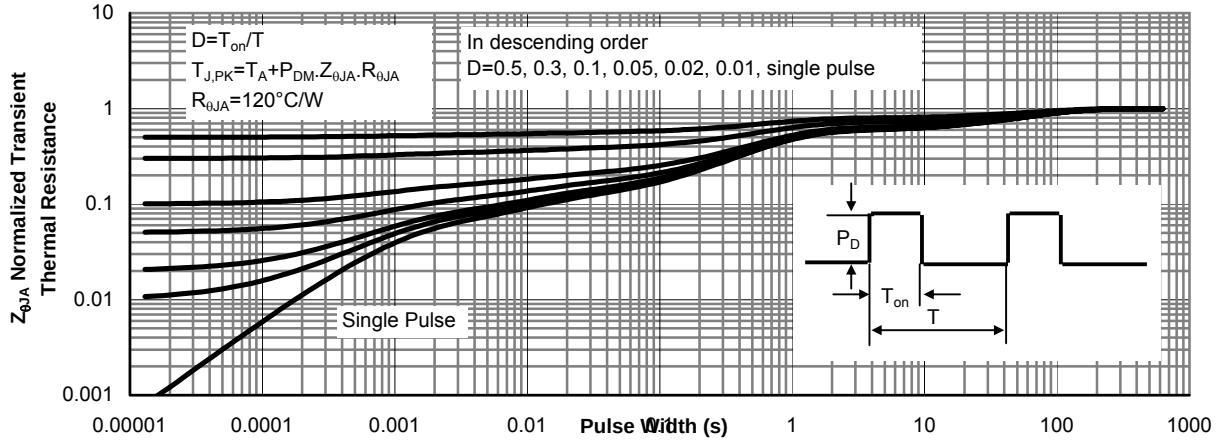


**Figure 11: Normalized Maximum Transient Thermal Impedance(Note E)**