

AQ297

3°C Accurate with Hysteresis Adjustable Thermostat SOT23-5 Package

Product Specification

Revision 1.1

October 08, 2006

General Description

The device AQ297 is an adjustable accurate lowpower solid-state thermostat. The temperature trip point can be set with one external resistor from 50°C to 150°C with an accuracy of 3 degrees. The thermal hysteresis is internally programmed to guarantee stability at the transition point.

The device AQ297 is used to protect systems from overheating above the normal rating of components like capacitors, batteries, or any other temperature sensitive component. The device AQ297 is also used in battery management systems to stop the battery charge when the battery temperature is outside of the safe temperature range.

The output OT is an open drain output that can sink up to 50mA when the threshold temperature is reached. The minimum voltage of operation is 2.2 V.


Applications

- Battery Chargers
- Electronic System protection
- Fan Control
- Microprocessor Thermal Management
- HVAC Systems


Features

- +/-3 degrees Celsius accuracy
- Adjustable temperature trip point
- Open-drain output capable of 50mA
- Internally programmed thermal hysteresis
- Low input voltage and current
- Excellent power supply noise rejection
- Offered in very small SOT23-5 package.
- RoHS Compliant

Block Diagram

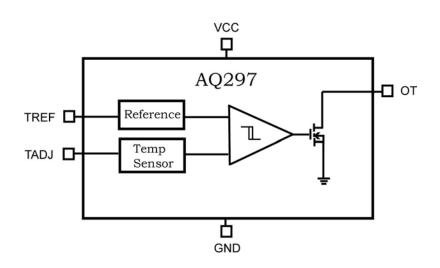

Pin Configuration



Pin Descriptions

Pin num	Pin Name	Function		
1	TREF	Reference connects to temperature adjust resistor		
2	GND	Ground		
3	TADJ	Adjust pin, connects to temperature adjust resistor		
4	VCC	V supply. Must be greater than 2.2V for normal operation.		
5	ОТ	Normally Open Drain, V_{DSS} when thermal threshold is reached.		

Ordering Information

Device	Operating Tj	Initial Tthresh	Adjusted Tthresh	Tol.	PKG Type	Wrap	Ordering Number
AQ297	-55°C ≤ 150°C	120°C	50-150°C	± 3°C	SOT-23-5	T&R	AQ297GY-M5-AJ-TR
AQ297	-55°C ≤ 150°C	120°C	50-150°C	± 3°C	SOT-23-5	T&R	AQ297GY-M5-AJ-TRL

Note: The TRL parts are Lead Free and RoHS compliant.

Absolute Maximum Ratings

Stress greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These stress ratings only, and functional operation of the device at these or any conditions beyond those indicated under recommended Operating Conditions is not implied. Exposure to "Absolute Maximum Rating" for extended periods may affect device reliability. Use of standard ESD handling precautions is required.

Parameter	Value	Units
Vcc Voltage	18	V
VOT Voltage	18	V
IOT Current	80	mA
ITREF Current	10	mA
ITADJ Current	10	mA
Operating Junction Temperature	155	°C
Lead Temperature (soldering 10 seconds)	260	°C
Storage Temperature Range	-65 to +150	°C

Electrical Specifications


Electrical characteristics are guaranteed over the full temperature range -55°C <Tj<150°C unless otherwise stated. Ambient temperature must be de-rated based upon power dissipation and package thermal characteristics. Unless otherwise specified: VCC = 5V, TREF and TADJ = no connect, Tj =25°C

Symbol	Parameter	Conditions	Min	Тур	Мах	Units
lvcc	Input Current			80	120	μA
Ivcc	Input Current	Tj > trip temperature		1.5	2.0	mA
Vcc	Input Voltage		2.2		16	V
Vот	Output V _{DSS}	IC = 10mA Tj > trip temperature		0.15	0.25	V
Іот	Output leakage current	VCC = 16V		0.2	0.4	μA
Οττ	Over temp Threshold	Unadjusted	117	120	123	°C
Тот	Over temp accuracy	Adjusted	-3		3	°C
Нот	Hysteresis			5		°C

Notes:

Typical Application


The device AQ297 is very simple to use. It is recommended to place the AQ297 in close proximity of the device whose temperature is to be sensed. The device AQ297 has an open drain output which is capable of sinking up to 50mA when the sensed temperature exceeds the trip point. The temperature trip point can be set by the addition of an external resistor RSET between the TREF and the TADJ pins as depicted in FIG.1 below.

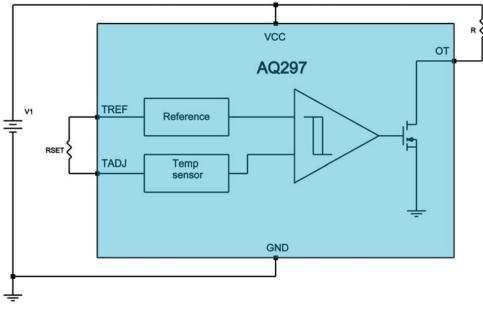




It is assumed that the temperature coefficient of the external resistor be close to zero as it commonly is. Higher accuracy resistors guarantee higher accuracy temperature trip point.

The resistor RSET value should be selected according to the table below to determine the desired temperature trip point. The table in particular shows the desired resistor value for the temperature range between 50°C and 80°C. If no external resistor is selected the temperature trip point will be 120°C.

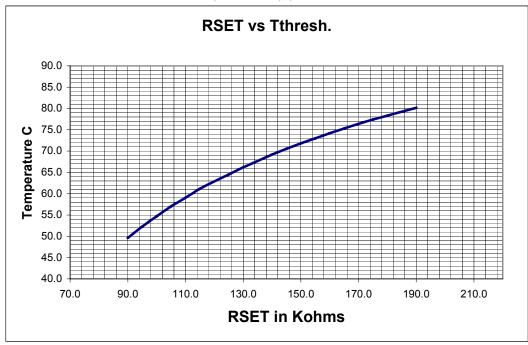

Package Dimensions SOT23-3, SOT23-4, SOT23-5, SOT23-6

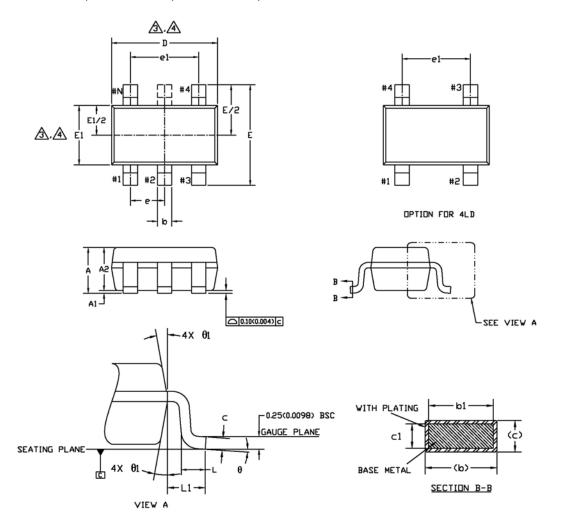

SY MBD	COMMON							
	DIMENSI	ONS MILLI	METER	DIMENSIONS INCH				
Ľ	MIN.	NDM.	MAX.	MIN.	NDM.	MAX.		
Α	1.20	1.30	1.40	0.047	0.051	0.055		
A1	0.05	-	0.15	0.002	-	0.006		
A2	0.90	1.15	1.30	0.035	0.045	0.051		
b	0.35	-	0.50	0.013	-	0.020		
b1	0.35	0.40	0.45	0.013	0.015	0.017		
С	0.08	-	0.22	0.003	-	0.008		
c1	0.08	0.13	0.20	0.003	0.005	0.007		
D	2.90 BSC			0.114 BSC				
Ε	2.80 BSC			0.110 BSC				
E1	1.60 BSC			0.062 BSC				
6	0.95 BSC			0.037 BSC				
e1	1.90 BSC			0.074 BSC				
L	0.35	0.45	0.55	0.013	0.017	0.021		
L1	0.60 REF.			0.023 REF.				
θ	0*	4•	8*	0*	4•	8*		
0 1	10* TYP			10* TYP				

NDTE :

- Dimensioning and tolerancing per ASME Y 14.5 M 1994. Dimensions are in millimeters.Converted inch dimension 1. 2.
- Dimensions are in millimeters.Converted inch dimension are not necessarily exact. Dimension D does not include mold flash, protrusions or gate burrs. Mold flash, protrusion or gate burrs shall not exceed 0.15 mm per side. Dimension El does not include interlead flash or protrusion. Interlead flash or protrusion shall not exceed 0.15 mm per side. Top package may be smaller than the bottom package Dimension D and El are deternine at the outermost extremes of the plastic body exclusive of mold flash oate burrs and interlead flash. A
- gate burrs and interlead flash. Terminal numbers are shown for reference only. Die is facing up for molding. Die is facing down for 5. trim/form.

.

Contact Information

Acutechnology Semiconductor Inc.TEL: (408) 259-23003487 McKee Rd. Suite 52FAX: (408) 259-9160San Jose CA , USA 95127website: www.acutechnology.com

Disclaimer

The information furnished by Acutechnology in this data sheet is believed to be accurate and reliable. However, Acutechnology assumes no responsibility for its use. Acutechnology reserves the right to change circuitry and specifications at any time without notification to the customer.

Life Support Policy

Acutechnology Products are not designed or authorized for use as components in life support devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user.