


**Power** 

## Model RFP-250250-6Z50-2

# Surface Mount Terminations

16 Watts, 50  $\Omega$ 



#### **Features**

- DC 3.0 GHz
- 16 Watts
- BeO Ceramic
- Non-Nichrome Resistive Element
- Low VSWR
- 100% Tested

#### **General Specifications**

Resistive Element: Thick film

Substrate: Beryllium oxide ceramic

**Terminals:** Thick film silver


#### **Electrical Specifications**

Resistance Value:50 ohms,  $\pm 2\%$ Frequency Range:DC - 3.0 GHzPower:16 WattsV.S.W.R.:1.25:1

**Notes:** Tolerance is  $\pm .010$ , unless otherwise specified. Operating temperature is  $-55^{\circ}$ C to  $+125^{\circ}$ C (see chart). Designed to meet or exceed applicable portions of MIL-E-5400. All dimensions are in inches.

Specifications subject to change without notice.

#### **Outline Drawing**

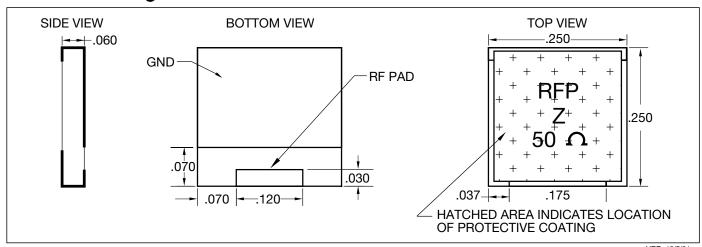

VER. 12/5/01



Available on Tape and Reel for Pick and Place Manufacturing.

Sales Desk USA: Voice: (800) 544-2414 Fax: (315) 432-9121 Sales Desk Europe: Voice: (+44) 23 92 232392 Fax: (+44) 23 92 251369


Anaren
What'll we think of next?


### Model RFP-250250-6Z50-2






#### **Typical Performance**

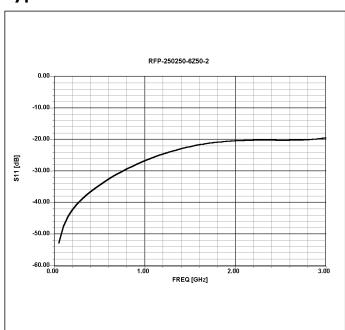


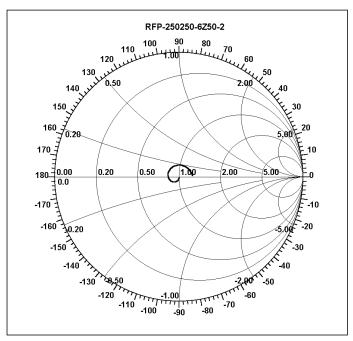

#### **Power Derating**

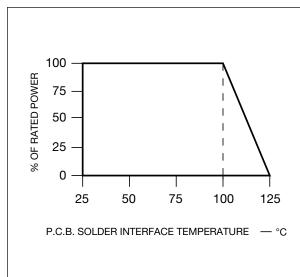

### **Suggested Mounting Procedures**

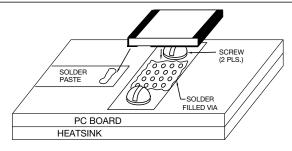

- 1. Solder part in place using 60/40 type solder with controlled temperature iron (700°F).
- 2. Drill thermal vias through PCB and fill with solder, such as 60/40 type.
- To ensure good thermal connectivity to heat sink, drill and tap heatsink and mount PCB board to heat sink using screws.

Available on Tape and Reel for Pick and Place Manufacturing.





Sales Desk USA: Voice: (800) 544-2414 Fax: (315) 432-9121

Sales Desk Europe: Voice: (+44) 23 92 232392 Fax: (+44) 23 92 251369