SPECIFICATIONS FOR NICHIA CHIP TYPE WHITE LED $\mathsf{MODEL}: NSSW064T$

NICHIA CORPORATION

 $(T_{0}-25^{\circ}C)$

1.SPECIFICATIONS

) Absolute Maximum Ratings (
Item	Symbol	Absolute Maximum Rating	Unit		
Forward Current	IF	35	mA		
Pulse Forward Current	IFP	100	mA		
Allowable Reverse Current	Ir	85	mA		
Power Dissipation	Pd	133	mW		
Operating Temperature	Topr	-40 ~ +110	°C		
Storage Temperature	Tstg	-40 ~ +110	°C		
Dice Temperature	Tj	125	°C		
Soldering Temperature	Tsld	Reflow Soldering : 260°C	for 10sec.		
		Hand Soldering : 350°C	for 3sec.		

IFP Conditions : Pulse Width ≤ 10 msec. and Duty $\leq 1/10$

(2) Thermal Characteristics

2) Thermal Characte	(Ta=25°C)		
Item	Symbol	Тур.	Unit
TT () (Rja	300	°C/W
Heat resistance	Rjs	120	°C/W

* Rja = Heat resistance from Dice to Ambient temperature (Ta)

Rjs = Heat resistance from Dice to Solder temperature of Cathode Side (Ts)

* Using Nichia standard circuit board FR4, t=1.6mm, Copper foil, t=35µm

(3) Initial Electrical/Optical Characteristics

(Ta=25°C) Item Symbol Condition Typ. Max. Unit Forward Voltage V_{F} IF=30[mA](3.4)3.8 V Luminous Intensity Iv IF=30[mA](2600)_ mcd Luminous Intensity Iv IF=20[mA] (1900)_ mcd IF=30[mA] 0.31 * _ _ Х _ Chromaticity Coordinate _ IF=30[mA]0.32 _ y _

* Please refer to CIE 1931 chromaticity diagram.

(4) Ranking					Γ)	Ca=25°C)
	Item		Symbol	Condition	Min.	Max.	Unit
		Rank X	Iv	IF=30[mA]	2880	4000	mcd
	Luminous Intensity	Rank W	Iv	IF=30[mA]	2000	2880	mcd
		Rank V	Iv	IF=30[mA]	1440	2000	mcd

* Luminous Intensity Measurement allowance is $\pm 10\%$.

Color Ranks

	Rank a0				
Х	0.280	0.264	0.283	0.296	
у	0.248	0.267	0.305	0.276	

$(IF=30mA,Ta=25^{\circ}C)$

	Rank b1					
х	0.287	0.283	0.330	0.330		
У	0.295	0.305	0.360	0.339		

	Rank b2				
Х	0.296	0.287	0.330	0.330	
у	0.276	0.295	0.339	0.318	

	Rank c0				
Х	0.330	0.330	0.361	0.356	
у	0.318	0.360	0.385	0.351	

* Color Coordinates Measurement allowance is ± 0.01 .

Basically, a shipment shall consist of the LEDs of a combination of the above ranks.
 The percentage of each rank in the shipment shall be determined by Nichia.

2. INITIAL OPTICAL/ELECTRICAL CHARACTERISTICS Please refer to figure's page.

3.OUTLINE DIMENSIONS AND MATERIALS

Please refer to figure's page.

Material as follows ;

Package	:	Heat-Resistant Polymer		
Encapsulating Resin	:	Silicone Resin (with Diffused + Phosphor)		
Electrodes	:	Ag Plating Copper Alloy		

4.PACKAGING

 \cdot The LEDs are packed in cardboard boxes after taping.

Please refer to figure's page.

The label on the minimum packing unit shows ; Part Number, Lot Number, Ranking, Quantity

- \cdot In order to protect the LEDs from mechanical shock, we pack them in cardboard boxes for transportation.
- \cdot The LEDs may be damaged if the boxes are dropped or receive a strong impact against them, so precautions must be taken to prevent any damage.
- \cdot The boxes are not water resistant and therefore must be kept away from water and moisture.
- \cdot When the LEDs are transported, we recommend that you use the same packing method as Nichia.

5.LOT NUMBER

The first six digits number shows lot number.

The lot number is composed of the following characters;

 $\bigcirc \Box \times \times \times \times - \bigtriangleup$

O - Year (6 for 2006, 7 for 2007)

 $\hfill\square$ - Month (1 for Jan., 9 for Sep., A for Oct., B for Nov.)

 $\times \times \times \times$ - Nichia's Product Number

- \triangle Ranking by Color Coordinates
- Ranking by Luminous Intensity

6.RELIABILITY

(1) TEST ITEMS AND RESULTS

	Standard			Number of
Test Item	Test Method	Test Conditions	Note	Damaged
Resistance to Soldering Heat (Reflow Soldering)	JEITA ED-4701 300 301	Tsld=260°C, 10sec. (Pre treatment 30°C,70%,168hrs.)	2 times	0/22
Solderability (Reflow Soldering)	JEITA ED-4701 300 303	Tsld= $215 \pm 5^{\circ}$ C, 3sec. (using flux, Lead Solder)	1 time over 95%	0/22
Thermal Shock	JEITA ED-4701 300 307	-40°C ~ 110°C 1min. (10sec.) 1min. (Pre treatment 30°C,70%,168hrs.)	100 cycles	0/100
Temperature Cycle	JEITA ED-4701 100 105	-40°C ~ 25°C ~ 110°C ~ 25°C 30min. 5min. 30min. 5min.	100 cycles	0/100
Moisture Resistance Cyclic	JEITA ED-4701 200 203	25°C ~ 65°C ~ -10°C 90%RH 24hrs./1cycle	10 cycles	0/100
High Temperature Storage	JEITA ED-4701 200 201	Ta=110°C	1000 hrs.	0/100
Temperature Humidity Storage	JEITA ED-4701 100 103	Ta=60°C, RH=90%	1000 hrs.	0/100
Low Temperature Storage	JEITA ED-4701 200 202	Ta=-40°C	1000 hrs.	0/100
Steady State Operating Life **		Ta=25°C, IF=35mA	1000 hrs.	0/100
Steady State Operating Life of High Temperature * *		Ta=85°C, IF=30mA	1000 hrs.	0/100
Steady State Operating Life of High Humidity Heat **		60°C, RH=90%, IF=30mA	1000 hrs.	0/100
Steady State Operating Life of Low Temperature **		Ta=-40°C, IF=30mA	1000 hrs.	0/100
Permanence of Marking	JEITA ED-4701 500 501	Solvent : Isopropyl Alcohol Solvent Temperature : 20 ~ 25°C Dipping Time : 5 min.	1 time	0/22
Vibration	JEITA ED-4701 400 403	$100 \sim 2000 \sim 100$ Hz Sweep 4min. 200m/s ² 3directions, 4cycles	48min.	0/10
Drop		75cm	3 times	0/10
Electrostatic Discharge	JEITA ED-4701 300 304	R=1.5kΩ, C=100pF Test Voltage=2kV	3 times Negative/Positive	0/22

(2) CRITERIA FOR JUDGING DAMAGE

			Criteria for	Judgement
Item	Symbol	Test Conditions	Min.	Max.
Forward Voltage	VF	IF=30mA	-	U.S.L.*)× 1.1
Luminous Intensity Condition 1	Iv	IF=30mA	L.S.L.**)× 0.7	-
Luminous Intensity Condition 2 **	Iv	IF=30mA	L.S.L.**)× 0.5	-

*) U.S.L. : Upper Standard Level **) L.S.L. : Lower Standard Level

***** These test items are judged by the criteria of Luminous Intensity Condition 2.

7.CAUTIONS

The LEDs are devices which are materialized by combining Blue LEDs and special phosphors. Consequently, the color of the LEDs is changed a little by an operating current. Care should be taken after due consideration when using LEDs.

(1) Moisture Proof Package

• When moisture is absorbed into the SMT package it may vaporize and expand during soldering. There is a possibility that this can cause exfoliation of the contacts and damage to the optical characteristics of the LEDs. For this reason, the moisture proof package is used to keep moisture to a minimum in the package.

• The moisture proof package is made of an aluminum moisture proof bag. A package of a moisture absorbent material (silica gel) is inserted into the aluminum moisture proof bag. The silica gel changes its color from blue to pink as it absorbs moisture.

(2) Storage

· Storage Conditions

Before opening the package :

The LEDs should be kept at 30°C or less and 90%RH or less. The LEDs should be used within a year. When storing the LEDs, moisture proof packaging with absorbent material (silica gel) is recommended.

After opening the package :

The LEDs should be kept at 30°C or less and 70% RH or less. The LEDs should be soldered within 168 hours (7days) after opening the package. If unused LEDs remain, they should be stored in moisture proof packages, such as sealed containers with packages of moisture absorbent material (silica gel). It is also recommended to return the LEDs to the original moisture proof bag again.

• If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : more than 24 hours at $65 \pm 5^{\circ}C$

- Nichia LED electrodes and leadframes are silver plated copper alloy. The silver surface may be affected by environments which contain corrosive substances. Please avoid conditions which may cause the LED to corrode, tarnish or discolor. This corrosion or discoloration might lower solderability or might affect on optical characteristics.
- Please avoid rapid transitions in ambient temperature, especially in high humidity environments where condensation can occur.
- (3) Heat Generation
- Thermal design of the end product is of paramount importance. Please consider the heat generation of the LED when making the system design. The coefficient of temperature increase per input electric power is affected by the thermal resistance of the circuit board and density of LED placement on the board, as well as other components. It is necessary to avoid intense heat generation and operate within the maximum ratings given in this specification.
- · The operating current should be decided after considering the ambient maximum temperature of LEDs.

(4) Soldering Conditions


The LEDs can be soldered in place using the reflow soldering method. Nichia cannot make a guarantee on the LEDs after they have been assembled using the dip soldering method.
Recommended soldering conditions


Reflow Soldering			Hand S	oldering
	Lead Solder	Lead-free Solder		
Pre-heat	120 ~ 150°C	180 ~ 200°C	Temperature	350°C Max.
Pre-heat time	120 sec. Max.	120 sec. Max.	Soldering time	3 sec. Max.
Peak	240°C Max.	260°C Max.		(one time only)
temperature	10 10	10 14		
Soldering time	10 sec. Max.	10 sec. Max.		
Condition	refer to	refer to		
	Temperature	Temperature		
	- profile ①.	- profile ②.		
		(N ₂ reflow is		
		recommended.)		

* Although the recommended soldering conditions are specified in the above table, reflow or hand soldering at the lowest possible temperature is desirable for the LEDs.

* A rapid-rate process is not recommended for cooling the LEDs down from the peak temperature. [Temperature-profile (Surface of circuit board)]

Use the conditions shown to the under figure.

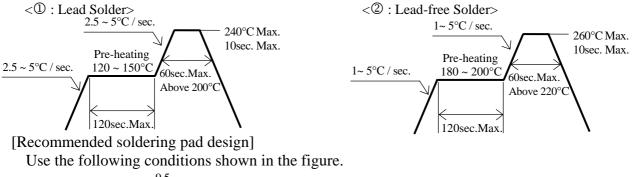



• Occasionally there is a brightness decrease caused by the influence of heat or ambient atmosphere during air reflow. It is recommended that the User use the nitrogen reflow method.

- The encapsulated material of the LEDs is silicone. Therefore the LEDs have a soft surface on the top of package. The pressure to the top surface will be influence to the reliability of the LEDs. Precautions should be taken to avoid the strong pressure on the encapsulated part. So when using the chip mounter, the picking up nozzle that does not affect the silicone resin should be used.
- Repairing should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used. It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.
- \cdot Reflow soldering should not be done more than two times.
- \cdot When soldering, do not put stress on the LEDs during heating.
- \cdot After soldering, do not warp the circuit board.


(5) Cleaning

- It is recommended that isopropyl alcohol be used as a solvent for cleaning the LEDs. When using other solvents, it should be confirmed beforehand whether the solvents will dissolve the package and the resin or not. Freon solvents should not be used to clean the LEDs because of worldwide regulations.
- Do not clean the LEDs by the ultrasonic. When it is absolutely necessary, the influence of ultrasonic cleaning on the LEDs depends on factors such as ultrasonic power and the assembled condition. Before cleaning, a pre-test should be done to confirm whether any damage to the LEDs will occur.
- (6) Static Electricity
 - \cdot Static electricity or surge voltage damages the LEDs.
 - It is recommended that a wrist band or an anti-electrostatic glove be used when handling the LEDs.
- All devices, equipment and machinery must be properly grounded. It is recommended that precautions be taken against surge voltage to the equipment that mounts the LEDs.
- When inspecting the final products in which LEDs were assembled, it is recommended to check whether the assembled LEDs are damaged by static electricity or not. It is easy to find static-damaged LEDs by a light-on test or a VF test at a lower current (below 1mA is recommended).
- \cdot Damaged LEDs will show some unusual characteristics such as the forward voltage becomes lower, or the LEDs do not light at the low current.


Criteria : (VF > 2.0V at IF=0.5mA)

(7) Others


- \cdot NSSW064 complies with RoHS Directive.
- \cdot The LED light output is strong enough to injure human eyes. Precautions must be taken to prevent looking directly at the LEDs with unaided eyes for more than a few seconds.
- Flashing lights have been known to cause discomfort in people; you can prevent this by taking precautions during use. Also, people should be cautious when using equipment that has had LEDs incorporated into it.
- The LEDs described in this brochure are intended to be used for ordinary electronic equipment (such as office equipment, communications equipment, measurement instruments and household appliances). Consult Nichia's sales staff in advance for information on the applications in which exceptional quality and reliability are required, particularly when the failure or malfunction of the LEDs may directly jeopardize life or health (such as for airplanes, aerospace, submersible repeaters, nuclear reactor control systems, automobiles, traffic control equipment, life support systems and safety devices).
- User shall not reverse engineer by disassembling or analysis of the LEDs without having prior written consent from Nichia. When defective LEDs are found, the User shall inform Nichia directly before disassembling or analysis.
- \cdot The formal specifications must be exchanged and signed by both parties before large volume purchase begins.
- The appearance and specifications of the product may be modified for improvement without notice.

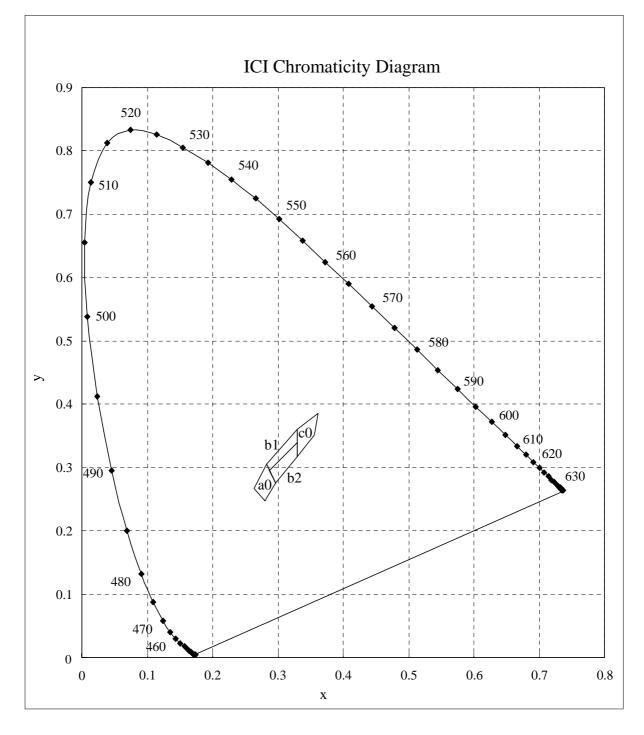


* Color Coordinates Measurement allowance is ± 0.01 .

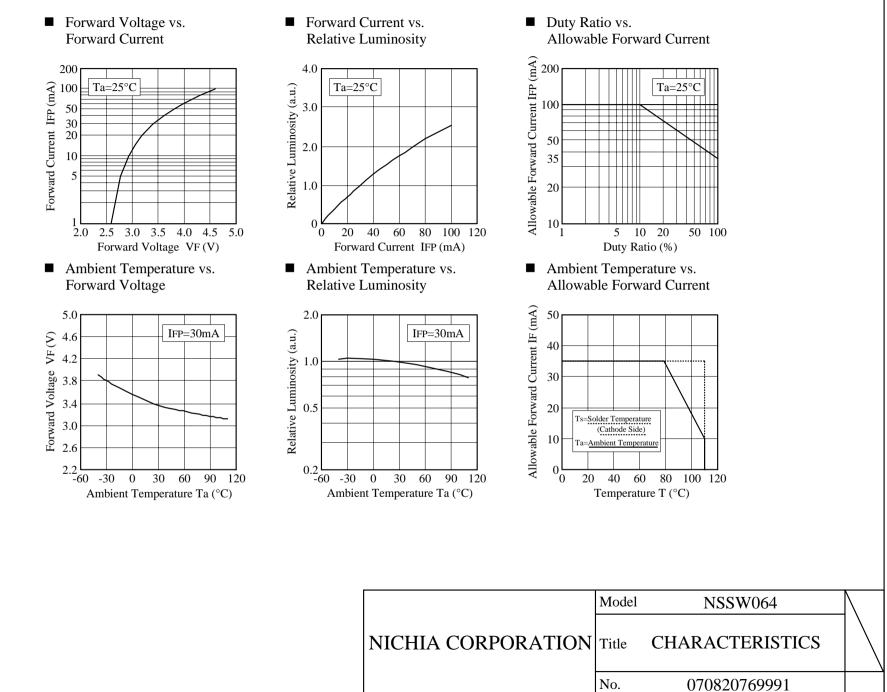


Nichia STSE-CC7196A <Cat.No.070829>

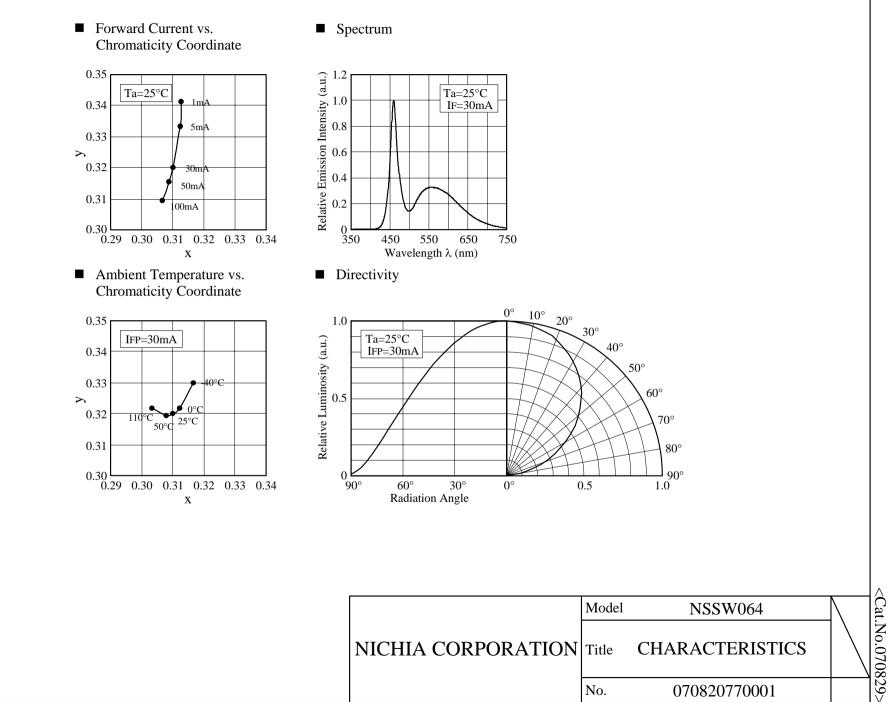

Nichia STSE-CC7196A <Cat.No.070829>

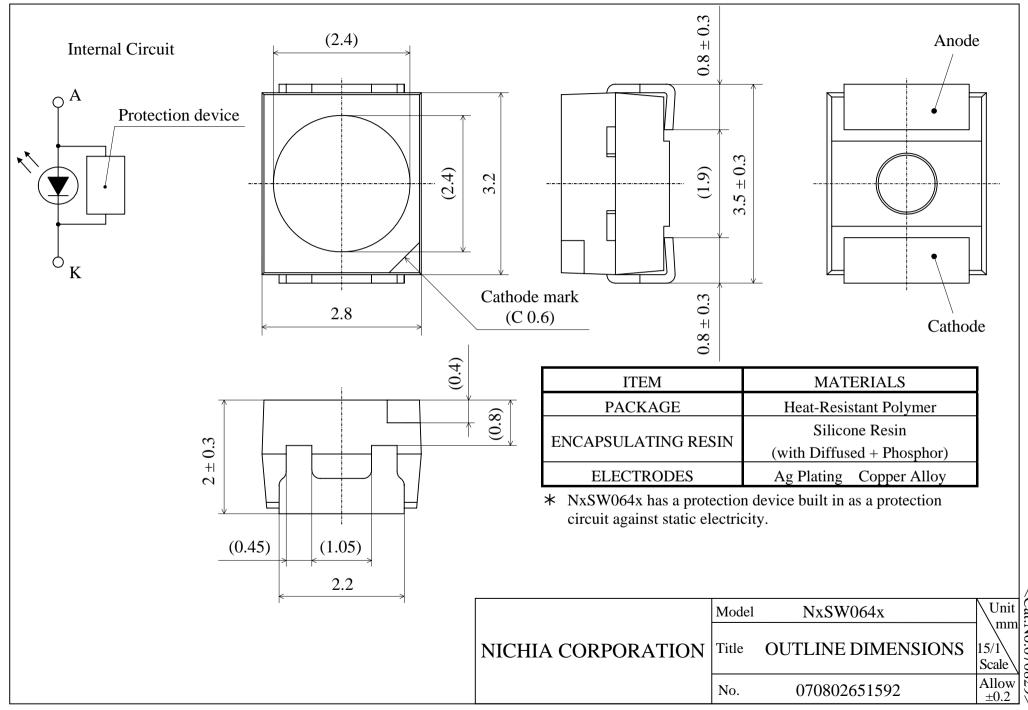

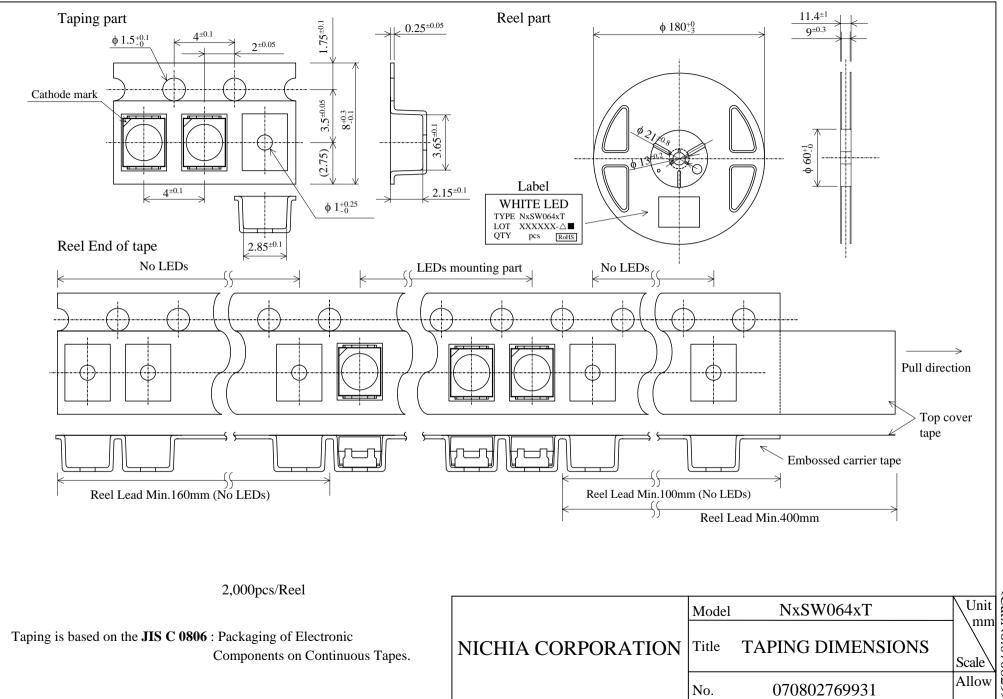

Nichia STSE-CC7196A <Cat.No.070829>

-11-

