

# KR 2620 Bandpass Filter

## General Description


KR 2620 is a 10 MHz bandpass filter. The filter has a 1 MHz 3 dB bandwidth and is designed for 300 Ω source and load impedance. Other passband frequencies, bandwidths and impedances are available. Please consult the factory.

## Features


- 10 MHz Bandpass
- 300 Ω
- DIP Package

## Typical Performance

**Passband Amplitude**  
(1 dB/div)

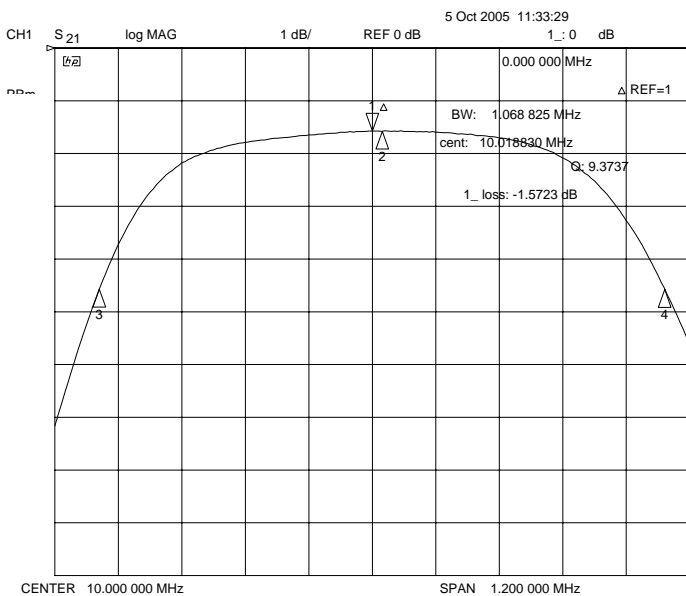

**Overall Response**  
(10 dB/div)

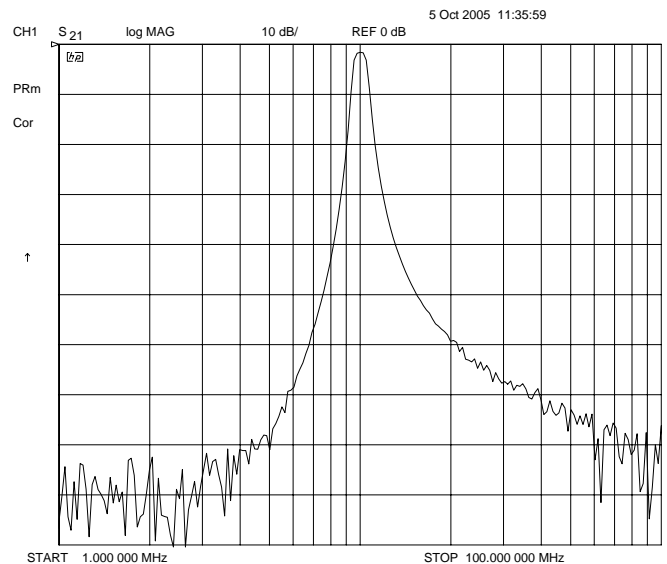

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001


Web [www.krfilters.com](http://www.krfilters.com)  
Email [sales@krfilters.com](mailto:sales@krfilters.com)  
Phone (732) 636-1900  
Fax (732) 636-1982

# KR 2620

## Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	10 MHz
Insertion Loss	< 3.5 dB (< 2 dB typical)
3 dB Bandwidth	1 MHz Typical
Source & Load	300 Ω

## Physical Dimensions

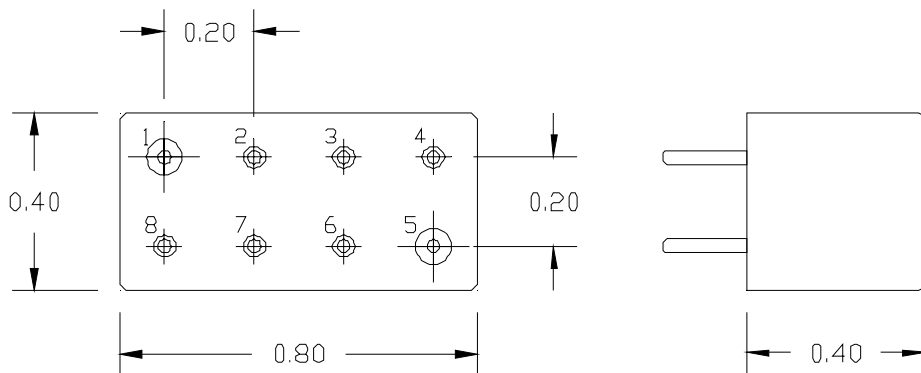

Metal Case  
 Pin 1 is Input Pin 5 is Output  
 All other Pins are Ground  
 All leads .030" diameter  
 Dimensions inches