

page 1 of 5

date 09/04/2007


PART NUMBER: CMT-1102 DESCRIPTION: piezo audio transducer


SPECIFICATIONS

operating voltage	25.0 Vp-p max.	
current consumption	4.5 mA max.	at 5 Vp-p, square wave, 4.1 KHz
sound pressure level	68 db min.	at 10 cm / 5 Vp-p, square wave, 4.1 KHz
electrostatic capacitance	12,000 pF ±30%	at 1KHz / 1 V
operating tempurature	-40 ~ +80° C	
storage tempurature	-40 ~ +80° C	
dimensions	ø11.0 x W9.0 x H1.7 mm	
weight	0.5 g max.	
material	LCP (white)	
terminal	SMD type	
RoHS	yes	

APPEARANCE DRAWING

tolerance: ±0.5

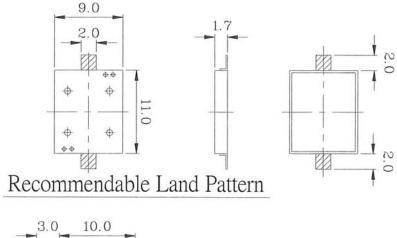

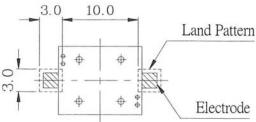




page 2 of 5


date 09/04/2007

PART NUMBER: CMT-1102 DESCRIPTION: piezo audio transducer

TYPICAL FREQUENCY RESPONSE CURVE

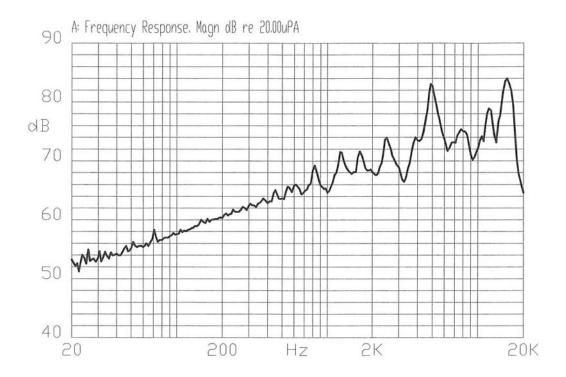

MEASUREMENT METHOD

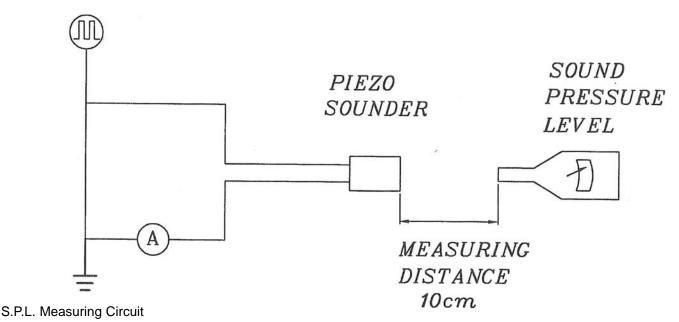

Input Signal: 5Vp-p, 4.1 KHz, square wave Mic: RION S.P.L. meter UC30 or equivalent

S.G.: Hewlett Packard 33120A function generator or equivalent



page 3 of 5

date 09/04/2007

PART NUMBER: CMT-1102 DESCRIPTION: piezo audio transducer

MECHANICAL CHARACTERISTICS

95% of the lead pad surface must be covered with solder
•
No interference in operation.
No damage or cutting off.
After the test, the part should
meet specifications without any
damage in appearance and
performance, except SPL. SPL
should be within ±10dB compared

ENVIRONMENT TEST

item	test condition	evaluation standard
high temp. test	After being placed in a chamber at +80°C for 240 hours.	
low temp. test	After being placed in a chamber at -40°C for 240 hours.	
humidity test	After being placed in a chamber at +40°C and 90±5% relative humidity for 240 hours.	The buzzer will be measured after
temp. cycle test	The part shall be subjected to 5 cycles. One cycle will consist of:	being placed at +25°C for 4 hours. The value of the
	+80°C	oscillation frequency/current consumption should be ±10% compared to the initial measurements. The SPL should be within ±10dB compared to the initial measurements.
	-40° C	
	30 15 30 15 Unit : minute	



page 4 of 5

date 09/04/2007

PART NUMBER: CMT-1102 DESCRIPTION: piezo audio transducer


RELIABILITY TEST

item	test condition	evaluation standard
operating (life test)	Continuous life test:	The buzzer will be measured after
	The part will be subjected to 48 hours of	being placed at +25°C for 4
	continuous operation at +65°C with rated	hours. The value of the
	voltage applied.	oscillation frequency/current
		consumption should be ±10%
	Intermittent life test:	compared to the initial
	A duty cycle of 1 minute on, 1 minute off, a	measurements. The SPL should
	minimum of 5,000 times at room temp	be within ±10dB compared to
	(+25 ±2°C) with rated voltage applied.	the initial measurements.

TEST CONDITIONS

standard test condition	a) tempurature: +5 ~ +35°C	b) humidity: 45 - 85%	c) pressure: 860-1060 mbar
judgement test condition	a) tempurature: +25 ±2°C	b) humidity: 60 - 70%	c) pressure: 860-1060 mbar

RECOMMENDED TEMPERATURE PROFILE FOR REFLOW OVEN

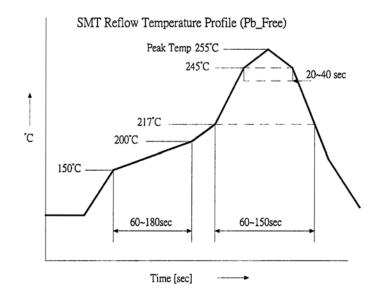



page 5 of 5

date 09/04/2007

PART NUMBER: CMT-1102 DESCRIPTION: piezo audio transducer

PACKAGING

