Open Carrier Double-Balanced Mixer For Microwave Telecommunications

Features

- LO 2.2 TO 8.0 GHz
- RF 3.4 TO 7.0 GHz
- IF DC TO 2.0 GHz
- LO DRIVE +10 dBm (NOMINAL)
- MICROSTRIP INTERFACE

Description

The MC2310 is a double balanced mixer, designed for use in military, commercial and test equipment applications. The design utilizes Schottky ring quad diodes and broadband soft dielectric and ferrite baluns to attain excellent performance. This mixer can also be used as a phase detector and/or bi-phase modulator since the IF port is DC coupled to the diodes. The use of high temperature solder and welded assembly processes used internally makes it ideal for use in manual, semi-automated assembly. Environmental screening available to MIL-STD-883, MIL-STD-202, or MIL-DTL-28837, consult factory.

Ordering Information

Part Number	Package		
MC2310	Open Carrier		
MC2310-2	Open Carrier		

Electrical Specifications: $Z_0 = 50\Omega$ Lo = +10 dBm (Downconverter application only)

Deremeter	Test Conditions	Unite	Typical	Guaranteed	
Parameter	Test Conditions	Units		+25⁰C	-54º to +85ºC
SSB Conversion Loss (max) & SSB Noise Figure (max) fR=3.4 to 7 GHz, fL=2.2 to 8 GHz, fl=0.05 to fR=3.4 to 7 GHz, fL=2.2 to 8 GHz, fl=0.05 to fR=3.4 to 7 GHz, fL=2.2 to 8 GHz, fl=0.05 to		dB dB dB	5.2 6.5 7.0	7.0 8.0 8.5	7.5 8.5 9.0
Isolation, L to R (min)	fL = 2.2 to 3 GHz fL = 3 to 8 GHz	dB dB	25 40	18 28	16 26
Isolation, L to I (min) fL = 2.2 to 3 GHz fL = 3 to 4 GHz fL = 4 to 8 GHz		dB dB dB	20 30 42	13 18 30	11 16 28
Isolation, R to I (min) fL = 3.4 to 7 GHz		dB	26		
1 dB Conversion Comp.	fL = +10 dBm	dBm	+4		
fR1 = 4.2 GHz at -10 dBm, fR2 = 4.21 at -10 fL = 2.7 GHz at +10 dBm fR1 = 6 GHz at -10 dBm, fR2 = 6.01 at -10 fL = 4.5 GHz at +10 dBm		dBm dBm	+13 +14		

1

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed. PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology


• North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400 • India Tel: +91.80.4155721 • China Tel: +86.21.2407.1588

Visit www.macomtech.com for additional data sheets and product information.

Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed. changes to the product(s) or information contained herein without notice.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make








Rev. V2





Rev. V2

Open Carrier Double-Balanced Mixer For Microwave Telecommunications


Typical Performance Curves









Conversion Loss vs. RF Frequency



LO-Port VSWR vs. Frequency



IF-Port VSWR vs. Frequency



ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed. PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology

PRELIMINARY: Data Sheets contain information regarding a product MiA-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed. North America Tel: 800.366.2266
 Europe Tel: +353.21.244.6400
 India Tel: +91.80.4155721
 China Tel: +86.21.2407.1588

Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

²




Open Carrier Double-Balanced Mixer For Microwave Telecommunications

Rev. V2

Absolute Maximum Ratings

Parameter	Absolute Maximum		
Operating Temperature	-54°C to +85°C		
Storage Temperature	-65°C to +100°C		
Peak Input Power	+23 dBm max @ +25°C +20 dBm max @ +85°C		
Peak Input Current	50 mA DC		

Outline Drawing: Open Carrier *MC2310

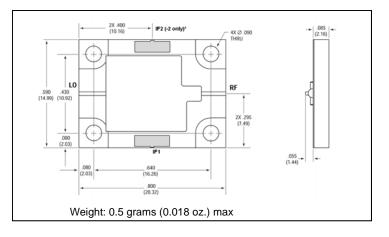

*For the base model, only the IF1 port is connected. For the "-2" model only the IF2 port is connected.

* Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed. **PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- North America Tel: 800.366.2266
 Europe Tel: +353.21.244.6400
 India Tel: +91.80.4155721
 China Tel: +86.21.2407.1588
- Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.