

KR 2290-35-SMA 35 MHz Highpass

General Description


KR 2290-35-SMA is a 35 MHz highpass filter. Other passband frequencies are available. Also available in surface mount package. Please consult the factory.

Features

- SMA Connectors
- Sharp Transition to Stopband
- 50 Ω Source and Load

Typical Performance

Overall Response (10 dB/div)

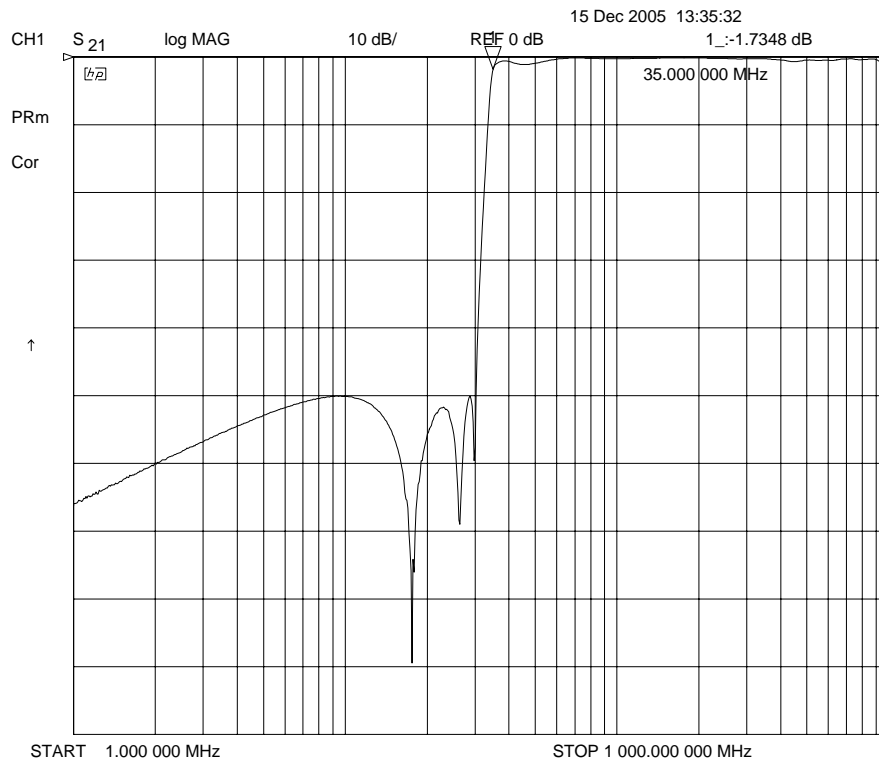

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR 2290-35-SMA

Specifications

Parameter	Specification
Filter type	Highpass
Start of Passband (< 4 dB)	35 MHz
Attenuation below 30 MHz	45 dB
Source and Load	50 Ω

Physical Dimensions

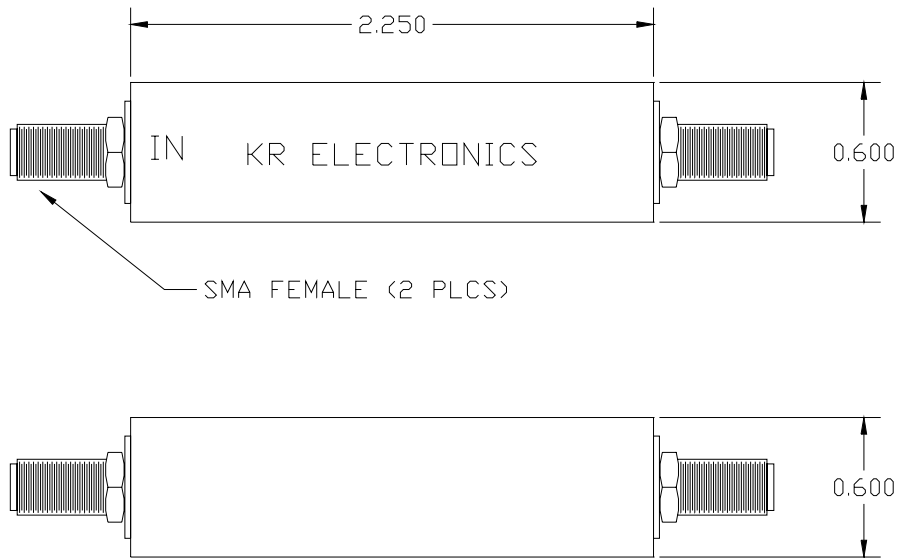

Dimensions in inches
 Metal Case
 Also available in surface mount package