

- ◆ CMOS NOR Gate And BUFFER
- ◆ Operating Voltage Range : 2V ~ 5.5V
- ◆ High Speed Operation : tpd = 2.6ns TYP
- ◆ Low Power Consumption : 1 μ A (max)
- ◆ MSOP-8A Package


■ Description

ML74WLBFSRG comprises of CMOS NOR gate and BUFFER, manufactured using silicon gate CMOS processes. The small quiescent current, which is one of the features of the CMOS logic, gives way to high speed operations which enables LS-TTL.

With wave forming buffers connected internally, stabilized output can be achieved as the series offers high noise immunity.

As the series is integrated into a mini molded, MSOP-8A package, high density mounting is possible.

■ Pin Configuration

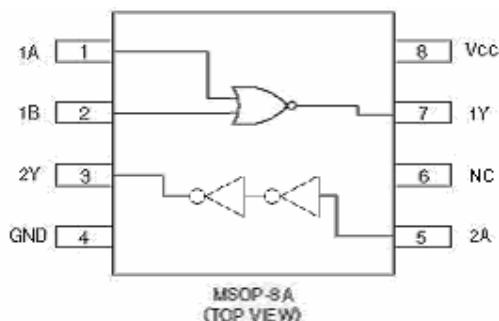

■ Applications

- Palmtops
- Digital Equipment

■ Features

High Speed Operation : tpd = 2.6ns TYP (Vcc=5V)

Operating Voltage Range: 2V ~ 5.5V

Low Power Consumption: 1 μ A (max)

Small Package : MSOP-8A

■ Function

NOR GATE

INPUT		OUTPUT
A	B	Y
H	H	L
H	L	L
L	H	L
L	L	H

BUFFER

INPUT	OUTPUT
A	Y
H	H
L	L

H=High level

L=Low level

■ Absolute Maximum Ratings

Ta=-40°C~85°C

PARAMETER	SYMBOL	RATINGS	UNITS
Power Supply Voltage	Vcc	-0.5 ~ +6.0	V
Input voltage	VIN	-0.5 ~ +6.0	V
Output Voltage	VOUT	-0.5 ~ Vcc +0.5	V
Input Diode Current	I _{IK}	± 20	mA
Output Diode current	I _{OK}	± 20	mA
Switch Output Current	I _{OUT}	± 25	mA
Vcc, GND Current	I _{CC} , I _{GND}	± 50	mA
Power Dissipation (Ta=25°C)	Pd	300	mW
Storage Temperature	T _{STG}	-65 ~ +150	°C

Note: Voltage is all Ground standardized.

■ Recommended Operating Conditions

PARAMETER	SYMBOL	CONDITIONS			UNITS
Supply Voltage	Vcc	2 ~ 5.5			V
Input Voltage	VIN	0 ~ 5.5			V
Output Voltage	VOUT	0 ~ Vcc			V
Operating Temperature	Topr	-40 ~ +85			°C
Input Rise / Fall Time	tr, tf	0 ~ 200 (Vcc=3.3V)			ns
		0 ~ 100 (Vcc=5V)			

■ DC Electrical Characteristics

PARAMETER	SYMBOL	Vcc(V)	CONDITIONS	Ta=25°C			Ta=-40~85°C		UNITS
				MIN	TYP	MAX	MIN	MAX	
Input Voltage	VIH	2.0	VIN=VIH or VIL	1.5	-	-	1.5	-	V
		3.0		2.1	-	-	2.1	-	
		5.5		3.85	-	-	3.85	-	
	VIL	2.0		-	-	0.5	-	0.5	V
		3.0		-	-	0.9	-	0.9	
		5.5		-	-	1.65	-	1.65	
Output Voltage	VOH	2.0	I _{OH} =-50μA	1.9	2.0	-	1.9	-	V
		3.0		2.9	3.0	-	2.9	-	
		4.5		4.4	4.5	-	4.4	-	
		3.0	I _{OH} =-4mA	2.58	-	-	2.48	-	
		4.5		3.94	-	-	3.80	-	
	VOL	2.0	I _{OL} =50μA	-	-	0.1	-	0.1	V
		3.0		-	-	0.1	-	0.1	
		4.5		-	-	0.1	-	0.1	
		3.0	I _{OL} =4mA	-	-	0.36	-	0.44	
		4.5		-	-	0.36	-	0.44	
Input Current	I _{IN}	0~5.5	VIN=Vcc or GND	-0.1	-	0.1	-1.0	1.0	μA
Quiescent Supply Current	I _{CC}	5.5	VIN=Vcc or GND, I _{OUT} =0μA	-	-	1.0	-	10.0	μA


■ Switching Electrical Characteristics

PARAMETER	SYMBOL	CL	Vcc(V)	CONDITIONS	Ta=25°C			Ta=-40~85°C		UNITS
					MIN	TYP	MAX	MIN	MAX	
Propagation Delay Time	tPLH	15pF	3.3		-	3.7	7.9	1	9.5	ns
			5.0		-	2.7	5.5	1	6.5	
		50pF	3.3		-	5.4	11.4	1	13	ns
			5.0		-	3.6	7.5	1	8.5	
	tPHL	15pF	3.3		-	3.3	7.9	1	9.5	ns
			5.0		-	2.5	5.5	1	6.5	
		50pF	3.3		-	4.6	11.4	1	13	ns
			5.0		-	3.5	7.5	1	8.5	
Input Capacitance	C _{IN}	-	5.0	VIN=Vcc or GND	-	2	10	1	10	pF
Power Dissipation Capacitance	C _{PD}	No Load, f=1MHz			-	9.3	-	-	-	pF

■Noise Characteristics


PARAMETER	SYMBOL	CL	Vcc(V)	CONDITIONS	Ta=25°C			UNITS
					MIN	TYP	MAX	
Not functioning output maximum dynamic VOL	VOLP	50pF	5.0		--	0.3	0.8	V
Not functioning output minimum dynamic VOL	VOLV	50pF	5.0		-0.8	-0.3	--	V
Minimum dynamic VIH	VIHD	50pF	5.0		--	--	3.5	V
Maximum dynamic VIL	VILD	50pF	5.0		--	--	1.5	V

■Typical Application Circuit

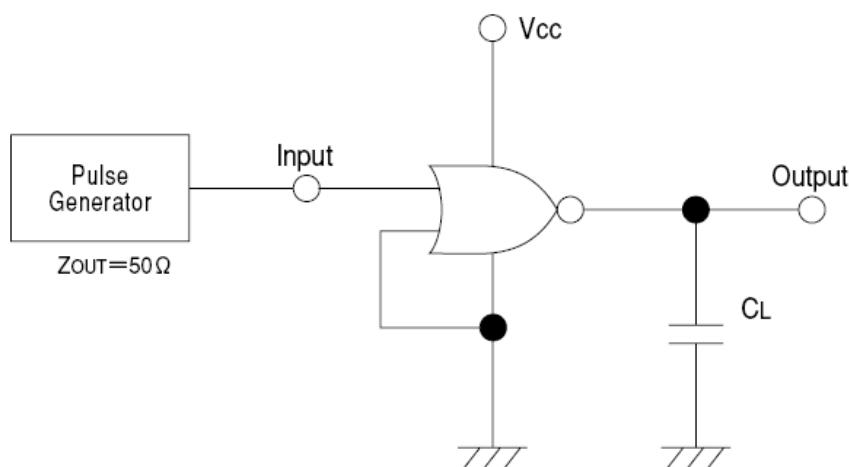


Note: Open output when measuring supply current

■Waveforms

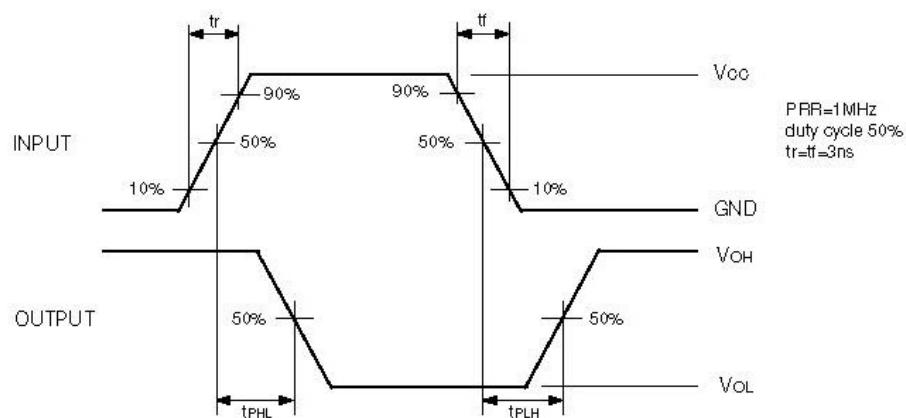


■ Typical Application Circuit

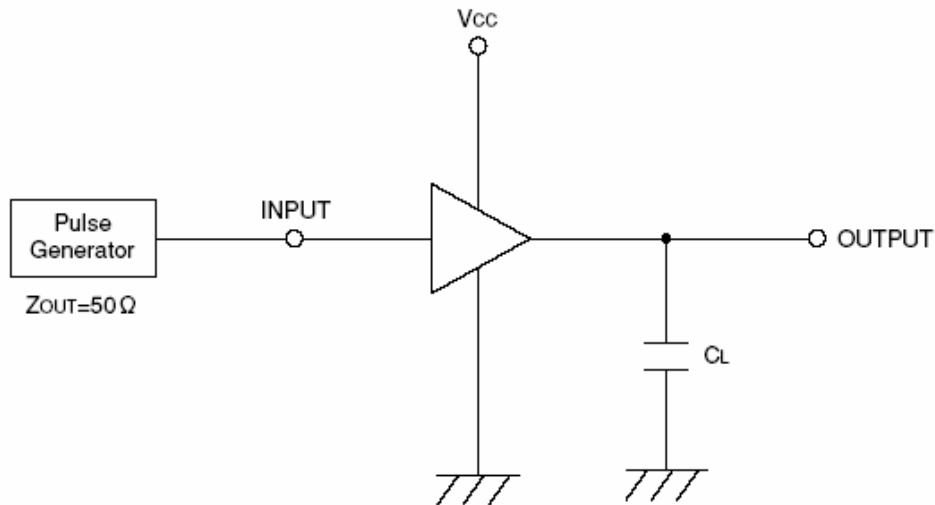

Note: Open output when measuring supply current

■ Waveforms

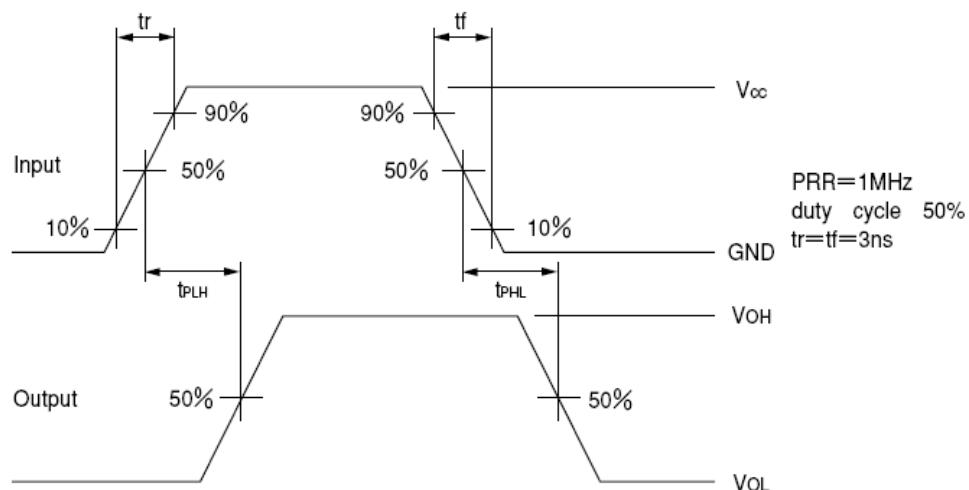

DISCLAIMER:

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequences.