BR6G SERIES


GLASS PASSIVATED BRIDGE RECTIFIERS

REVERSE VOLTAGE FORWARD CURRENT - 50 to 1000 Volts

- 6.0 Amperes

FEATURES

- Surge overload rating -150 amperes peak
- Low forward voltage drop
- Small size; simple installation
- Sliver plated copper leads
- Mounting position: Any

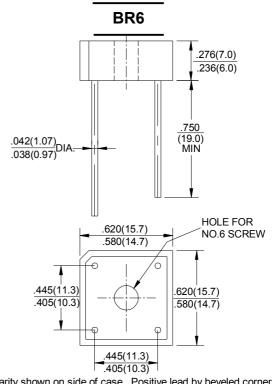

Polarity shown on side of case, Positive lead by beveled corner.

Dimensions in inches and (milimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave ,60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

SYMBOL	BR6005G	BR601G	BR602G	BR604G	BR606G	BR608G	BR610G	UNIT
VRRM	50	100	200	400	600	800	1000	V
VRMS	35	70	140	280	420	560	700	V
I(AV)	6.0 3.0							А
IFSM	150							А
VF	1.1							V
lR	10.0 1.0							μA mA
TJ	-55 to +150							$^{\circ}\!\mathbb{C}$
Тѕтс	-55 to +150							$^{\circ}\!\mathbb{C}$
	VRRM VRMS I(AV) IFSM VF IR	VRRM 50 VRMS 35 I(AV) IFSM VF IR TJ	VRRM 50 100 VRMS 35 70 I(AV) IFSM VF IR TJ	VRRM 50 100 200 VRMS 35 70 140 I(AV) IFSM VF IR TJ TJ	VRRM 50 100 200 400 VRMS 35 70 140 280 I(AV) 6.0 3.0 IFSM 150 VF 1.1 IR 10.0 TJ -55 to +150	VRRM 50 100 200 400 600 VRMS 35 70 140 280 420 I(AV) 6.0 3.0 IFSM 150 VF 1.1 IR 10.0 TJ -55 to +150	VRRM 50 100 200 400 600 800 VRMS 35 70 140 280 420 560 I(AV) 6.0 3.0 IFSM 150 VF 1.1 IR 10.0 TJ -55 to +150	VRRM 50 100 200 400 600 800 1000 VRMS 35 70 140 280 420 560 700 I(AV) 6.0 3.0 IFSM 150 VF 1.1 IR 10.0 1.0 -55 to +150

Notes:1.Unit mounted on metal chassis

2. Unit mounted on P.C. board

RATING AND CHARACTERTIC CURVES BR6G SERIES

