

# KR Electronics 2489-6 Notch Filter

## General Description


KR 2489-6 is a 95 MHz notch filter. The filter is designed for 50  $\Omega$  source and load impedance. Other notch frequencies, bandwidths and impedances are available. Please consult the factory.

## Features

- Notch Filter
- 50  $\Omega$
- DIP Package

## Typical Performance

### Overall Response

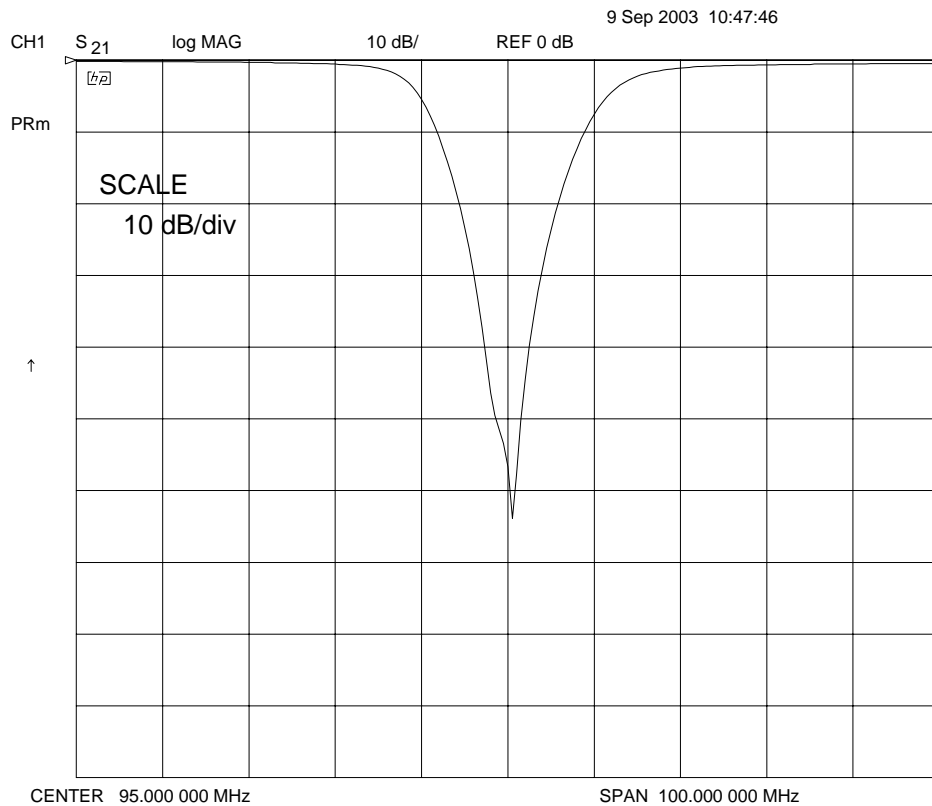


# KR 2489-6

## Specifications

Parameter	Specification
Filter type	Notch
Notch Frequency	95 MHz
Maximum 3 dB Bandwidth	34.83 MHz
Source & Load	50 Ω

## Physical Dimensions

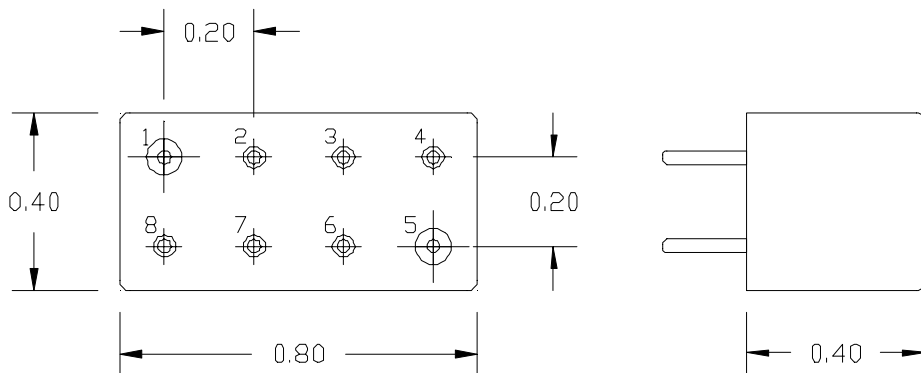

Metal Case  
 Pin 1 is Input Pin 5 is Output  
 All other Pins are Ground  
 All leads .030" diameter  
 Dimensions inches