

60-130 WATT DESKTOP POWER ADAPTERS

DESCRIPTION

The PUP60/80/130 series of AC/DC switching power supplies are for 60 to 130 watts of continuous output power. They are enclosed in a 94V-1 rated polyphenylene-oxide case with an IEC 320 inlet to mate with interchangeable cord for world-wide use. An on/off switch can be added at request. All models meet CISPR 22 and FCC class B emission limits, and comply with UL, CSA, IEC and CE requirements.

FEATURES

- · Optional output connectors
- · Optional on/off switch
- · 100% burn-in at full rated load
- · Auto-ranging input
- · Input surge current protection
- · Overvoltage protection
- · Overcurrent protection
- · Thermal protection

INPUT SPECIFICATIONS

Input voltage: 90 to 130 VAC or 180 to 260 VAC

(auto-ranging)

47 to 63 Hz Input frequency:

Input current:

PUP60/80 Series: 1.8A (rms) for 115VAC

1.0A (rms) for 230VAC

PUP130 Series: 3.0mA (rms) for 115VAC

1.7A (rms) for 230VAC

Leakage current: 0.40mA max. @ 115VAC, 60Hz

0.80mA max. @ 230VAC, 50Hz

OUTPUT SPECIFICATIONS

Output voltage/current: See rating chart Output power range: See rating chart

Ripple and noise: 1% peak to peak maximum Overvoltage protection: Provided on output; set at 112 -

132% of its nominal output

voltage

Overcurrent protection: All outputs protected to short

circuit conditions

Temperature coefficient: All outputs ±0.04% /°C

maximum

Transient response: Maximum excursion of 4% or

> better on all models, recovering to 1% of final value within 500us after a 25% step load change

ENVIRONMENTAL SPECIFICATIONS

Operating temperature : 0° C to +40 $^{\circ}$ C (PUP60/80 series)

 0° C to +50°C (PUP130 series)

-40°C to +85°C Storage temperature:

5% to 95% non-condensing Relative humidity:

PUP60/80/130 SERIES (LVD+EMC)



Safety Standard Approvals:



UL 60950-1 CSA C22.2 No. 60950-1



TÜV EN60950-1

GENERAL SPECIFICATIONS

Switching frequency: 60KHz to 75KHz

Efficiency: 70 % minimum on Vo $\geq 12V$,

65% minimum on the others

Hold-up time:

PUP60/80 SERIES: 15 msec minimum at 110VAC **PUP130 SERIES:** 10 msec minimum at 110VAC Line regulation: ±0.5% maximum at full load

Inrush current: 15 amps @ 115VAC, or 30 amps @

230VAC, at 25°C cold start

Withstand voltage: 3000VAC from input to output

> 1500VAC from input to ground 500VAC from output to ground

MTBF: PUP60/PUP80 300,000 hours

minimum, PUP130 400,000 hours minimum at full load at 25°C ambient, calculated per

MIL-HDBK-217F, excluding DC

fan.

EMC performance (EN55024)

EN55022: Class B conducted class B radiated FCC: Class B conducted, Class B radiated Class B conducted, Class B radiated VCCI:

EN61000-3-2: Harmonic distortion, Class A

EN61000-3-3: Line flicker

EN61000-4-2: ESD, ± 8KV air and ± 4KV contact

EN61000-4-3: Radiated immunity, 3V/m EN61000-4-4: Fast transient/burst, ± 1KV Surge, ± 1KV diff., ± 2KV com. EN61000-4-5: EN61000-4-6: Conducted immunity, 3Vrms EN61000-4-8: Magnetic field immunity, 1A/m EN61000-4-11: Voltage dips, 30 % reduction for

500ms and >95% reduction for 10ms

AUTORANGING INPUT PUP60/PUP80/PUP130 SERIES


OUTPUT VOLTAGE/CURRENT RATING CHART

		Output				
Model	Vnom.	Imin.	Imax.	Tol.	Power	
PUP60-10	5V	0A	12A	5%	60W	
PUP60-10-1	7V	0A	8.6A	5%	60W	
PUP60-11	10V	0A	6A	5%	60W	
PUP80-12	12V	0A	6.7A	4%	80W	
PUP80-13	15V	0A	5.3A	3%	80W	
PUP80-13-1	18V	0A	4.5A	3%	80W	
PUP80-14	24V	0A	3.4A	3%	80W	
PUP80-16	30V	0A	2.7A	2%	80W	
PUP80-17	36V	0A	2.3A	2%	80W	
PUP80-18	48V	0A	1.7A	2%	80W	
PUP130-12	12V	0A	10.8A	5%	130W	
PUP130-13	15V	0A	8.6A	4%	130W	
PUP130-13-1	18V	0A	7.2A	4%	130W	
PUP130-14	24V	0A	5.4A	3%	130W	
PUP130-16	30V	0A	4.3A	3%	130W	
PUP130-17	36V	0A	3.6A	2%	130W	
PUP130-18	48V	0A	2.7A	2%	130W	

Notes: (1) PUP60 and PUP80 series are without, while PUP130 series are with, built-in fan.


(2) PUP60 series are with remote sense. The other series can also be equipped with remote sense. Please consult factory.

MECHANICAL SPECIFICATIONS

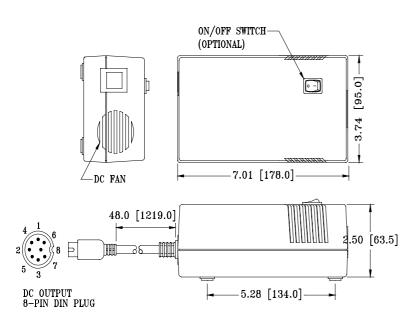

NOTES:

- 1. Dimensions shown in inch [mm]
- 2. Tolerance 0.02 [0.5] maximum
- 3. Weight: 1.0 Kgs (2.2 Lbs.) approx.
- 4. See pages 6-19 to 6-26 for optional output connectors. Add the suffix assigned for a selected connector to a wanted model number, e.g. PUP130-14-HA, for ordering.
- To order a model with on/off switch, add suffix "S" to the model number, e.g. PUP130-14-HA-S.



PIN CHART

MODEL	PIN	1	2	3	4	5	6	7	8
PUP60-10 PUP60-11	PUP60-10-1	RETURN	-SENSE	OUTPUT +V	RETURN	OUTPUT +V	RETURN	OUTPUT +V	+SENSE
PUP80-12 PUP80-13-1 PUP80-16 PUP80-18 PUP130-13 PUP130-14 PUP130-17	PUP80-13 PUP80-14 PUP80-17 PUP130-12 PUP130-13-1 PUP130-16 PUP130-18	RETURN	RETURN	OUTPUT +V	RETURN	OUTPUT +V	RETURN	OUTPUT +V	OUTPUT +V