
# MP9100 TO-247 Kool-Pak<sup>®</sup> Power Film Resistor

## TO-247 Style Power Package 100 Watt Non-Inductive Design

- 100 watt continuous power at +25°C case temperature •
- TO-247 package utilizes proven power semiconductor thermal solutions
- Equivalent to UL94 V-O flammability rating •
- Excellent pulse/surge performance
- Non-inductive design for high speed switching, snubbers and rf applications
- Safe and reliable operation up to +175°C case temperature
- Electrically isolated case

### Maximum Ratings


Rating	Symbol	Value	Unit
Power Dissipation: With heat sink T <sub>C</sub> =25°C	PD	100	Watts
Free Air at 25°C without heat sink	PD	3.5	Watts
Thermal Resistance: Resistance film (J) to Case (C)	R <sub>θJC</sub>	1.5	°C/W
Operating and Storage Temperature Range	T <sub>C</sub> ,T <sub>J</sub> , T <sub>STG</sub>	-55 to +175	°C



Duration	Energy	Units	
10 µsec	0.07	Joules	
100 µsec	0.25	Joules	
1 msec	0.9	Joules	
10 msec	3.5	Joules	
100 msec	15	Joules	
250 msec	38	Joules	
V maximum	600	volts peak	

## Derating Using Case Temperature (T<sub>C</sub>):

All power and overload ratings are derated based upon case temperature using the derating curve. The case temperature is measured at the center of the ceramic mounting surface, with the part properly mounted and under electrical load



Standard Resistance Values:

Tolerance: 1% Standard

3.90 Ω

5.00 Ω

8.00 Ω

 $10.0 \Omega$ 

12.0 Q

15.0 Ω

18.0 Ω

20.0 Ω

22.0 Ω

MP9100 - 0.050 - 1%

25.0 Ω

27.0 Ω

33.0 Ω

**39.0** Ω

47.0 Ω

50.0 Ω

56.0 Ω

75.0 Ω

100 Ω

(1% Std)

0.50 Ω

0.75 Ω

1.00 Ω

1.50 Q

2.00 0

2.20 Ω

2.50 Ω

3.00 Ω

3.30 Ω

**Resistor Value:** (see table)

0.10 Ω

0.12 Ω

0.15 Ω

0.20 Ω

0.25 Ω


0.30 Ω

0.33 Ω

0.39 Ω

(1) For multiple pulses/surge ratings please contact applications engineering for assistance

Mounting Note: Mount on a smooth, clean and flat heat sink surface with a thermal interface material, such as thermal grease. The entire exposed ceramic portion must be in contact with the heat sink. When screw mounting, use a Belleville washer which provides a mounting force of 150 to 300 pounds (665 to 1330 N). Mounting torque to avoid package damage is 8 in-lbs. (0.90 N-m). If a spring clip is used, a clip force of 4.5 to 35 pounds (20 to 155 N) is recommended

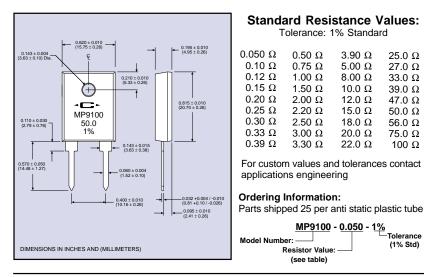

### RHOPOINT COMPONENTS LTD. Holland Road Hurst Green Oxted, Surrey, RH8 9AX





These products are covered by one or more patents, also patents pending.

## **Electrical Specifications:**

## Temperature Coefficient:

TC referenced to +25°C, ∆R taken at +175°C 0.50 ohm and above, -20 to +80 ppm/°C 0.050 ohm to 0.49 ohm, 0 to +150 ppm/°C

Inductance: 10 nH typical in series when measured at the shoulder of the lead

Capacitance: <1 pf typical without heat sink

DWV: 1500  $V_{RMS}AC$  isolation to the mounting surface or a clip in contact with the top surface

Insulation Resistance: 10,000 Megohms, min. The resistor element is electrically isolated from the mounting surface.

Momentary Overload: 1.5 times rated power for 5 seconds,  $\Delta R \pm (0.5 \text{ percent} + 0.0005 \text{ ohm}) \text{ max.}$ based on a case temperature of +175°C max.

## **Environmental Specifications:**

Load Stability: 2000 hours at rated power  $\Delta R$  less than  $\pm(1\% + 0.0005\Omega)$ 

Moisture Resistance: Mil-Std-202, Method 106,  $\Delta R \pm (0.5 \text{ percent} + 0.0005 \text{ ohm}) \text{ max.}$ 

Thermal Shock: Mil-Std-202. Method 107. Cond. F,  $\Delta R \pm (0.5 \text{ percent} + 0.00005 \text{ ohm}) \text{ max.}$ 

Shock: 100G, Mil-Std-202, Method 213,

Cond. I,  $\Delta R \pm (0.4 \text{ percent} + 0.0005 \text{ ohm}) \text{ max.}$ 

Vibration, High Frequency: Mil-Std 202, Method 204, Condition D, ΔR±(0.4% +0.0005Ω) max.

Terminal Strength: Mil-Std-202, Method 211, Cond. A (Pull Test) 5 lbs.,

ΔR ±(0.2 percent + 0.0005 ohm) max.

Measurement Note: Resistance measurements shall be made at 0.2 inch (5.08 mm) from the resistor body

For more information please see our website: Application Note: CAD-9100-1

> Tel: +44 (0)1883 717988 Fax: +44 (0)1883 712938 Email: components@rhopoint.co.uk Website: www.rhopoint.co.uk/components/

© 2000 Caddock Electronics. Inc.