AC/DC converter AC100V input, 12V/350mA output

• Absolute Maximum Ratings

Parameter	Symbol	Limits	Unit	
Input voltage	Vi	170	V	DC
Output current	lo	350	mApk	
ESD endurance	Vsurge	2	kV	IEC61000-4-2 Highest level 1
Operating temperature range	Topr	-20 ~ +80	°C	
Storage temperature range	Tstg	-25 ~ +85	°C	
Voltage between 1&2 order		1800	Vrms	2sec


Electrical Characteristics

Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions
Input voltage range	Vi	120	141	162	V	DC(85~115VAC)
Output voltage	Vo	11	12	13	V	Vi=141V, Io=350mA
Output current	lo	0	-	350	mA	Vi=141V *1
Line regulation	Vr	-	0.15	0.3	V	Vi=120~162V, Io=350mA
Load regulation	VI	-	0.15	0.3	V	Vi=141V, Io=0~350mA *2
Output ripple voltage	Vp	-	0.25	-	Vp-p	Vi=141V, Io=350mA
Power conversion efficiency	η	70	77	_	%	Vi=141V, Io=350mA *2
Isolation resistance		100	_	_	MΩ	DC100V between 1&2 order

*1 Maximum output current varies depending on ambient temperature ; please refer to derating curve

*2 Please refer to Load regulation, Conversion effciency.

Application circuit

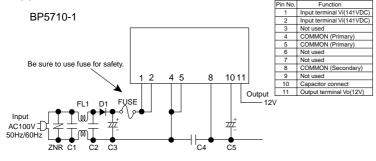


For acutual usage, Please kindly evaluate and confirm our part mounted in your product, Especially, Please make sure to confirm whether the load current exceed Max. rated current by using the current probe.


External components setting

FUSE: Fus			
1000.103	e	Please make sure to use quick acting fuse 0.5A	
, ,	r noise terminal ltage reduction	Capacitance(C1,2) : 0.1μ F- 0.22μ F, (C4): 4700pF degree Rated voltage : 200V or higher. Film capacitor or ceramic capacitor. Reduce the noise terminal voltage. The constant value should be evaluated in the set.	,
	itor for input e smoothing	$Capacitance: 33\mu F{-}330\mu F Rated \ voltage: 200V \ or \ higher$	
	itor for Output e smooting	Capacitance : 470μ F -1000μ F Rated voltage : 25V or higher, ESR is 0.16 Ω max. Ripple current is 0.58Arms above. Output noise voltage is influenced.Please evaluate it in the actual set.	
D1: Rectifie	er diode	In the absolute maximum ratings, the reverse peak voltage should be 400V or higher, the average rectifying current should be 0.5A or higher, and the peak surge current should be 20A or higher. (Full-wave rectifier can be used in our part.)	(
	oise terminal e reduction	Please use the linefilter, if necessary.	
ZNR: Varist	tor	Varistor must be used. It protects this part from lightning surge and static electricity.	

Dimension(Unit : mm)



Derating Curve




Switching Frequency

₽coo	(Ta=25°C, Vi=141V)								
(ZHX) 500 st									
£ 500									
9400 9									
g 300									
²⁰⁰									
تي 100 رو									
S witching Frequency 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0) 5			50 20 Irrent		50 30 1)	00 3		


Conversion Efficiency

©100		Conv (Ta=	versio =25°C	n Effi , Vi=1	cienc (41V)	у		
8100								
5 90								
0 00				-	_	-		-
₩ E0								
ш 50	\square							
L 40	17							
5 30	1							
≥ 20								
Conversion Efficiency η(%) 0 10 0 0 0 0 0 0 0 0 0 00 0 0 0 0 0 0 0								
0 0) 5			50 20			00	35
Output Current Io(mA)								

Load Regulation



Surface Temperature Rising



BP5710-1

Precautions on Use of ROHM Power Module

Safety Precautions

- 1) The products are designed and produced for application in ordinary electronic equipment (AV equipment, OA equipment, telecommunication equipment, home appliances, amusement equipment etc.). If the products are to be used in devices requiring extremely high reliability (medical equipment, transport equipment, aircraft/spacecraft, nuclear power controllers, fuel controllers, car equipment including car accessories, safety devices, etc.) and whose malfunction or operational error may endanger human life and sufficient fail-safe measures, please consult with the Company's sales staff in advance. If product malfunctions may result in serious damage, including that to human life, sufficient fail-safe measures must be taken, including the following:
 - [a] Installation of protection circuits or other protective devices to improve system safety
 - [b] Installation of redundant circuits in the case of single-circuit failure
- 2) The products are designed for use in a standard environment and not in any special environments. Application of the products in a special environment can deteriorate product performance. Accordingly, verification and confirmation of product performance, prior to use, is recommended if used under the following conditions:
 - [a] Use in various types of liquid, including water, oils, chemicals, and organic solvents
 - [b] Use outdoors where the products are exposed to direct sunlight, or in dusty places
 - [c] Use in places where the products are exposed to sea winds or corrosive gases, including Cl2, H2S, NH3, SO2, and NO2
 - [d] Use in places where the products are exposed to static electricity or electromagnetic waves
 - [e] Use in proximity to heat-producing components, plastic cords, or othe flammable items
 - [f] Use involving sealing or coating the products with resin or other coating materials
 - [g] Use involving unclean solder or use of water or water-soluble cleaning agents for cleaning after soldering
 - [h] Use of the products in places subject to dew condensation
- 3) The products are not radiation resistant.
- 4) The Company is not responsible for any problems resulting from use of the products under conditions not recommended herein.
- 5) The Company should be notified of any product safety issues. Moreover, product safety issues should be periodically monitored by the customer.

Precautions Regarding Application Example and External Circuits

- If change is made to the constant of an external circuit, allow a sufficient margin due to variations of the characteristics of the products and external components, including transient characteristics, as well as static characteristics. Please be informed that the Company has not conducted investigations on whether or not particular changes in the application examples or external circuits would result in the infringement of patent rights of a third party.
- 2) The application examples, their constants, and other types of information contained herein are applicable only when the products are used in accordance with standard methods. Therefore, if mass production is intended, sufficient consideration to external conditions must be made.

Prohibitions Regarding Industrial Property

- 1) These Specifications contain information related to the Company's industrial property. Any use of them other than pertaining to the usage of appropriate products is not permitted. Duplication of these Specifications and its disclosure to a third party without the Company's permission is prohibited.
- 2) Information and data on products, including application examples, contained in these specifications are simply for reference; the Company does not guarantee any industrial property rights, intellectual property rights, or any other rights of a third party regarding this information or data. Accordingly, the Company does not bear any responsibility for:
 - [a] infringement of the intellectual property rights of a third party
 - [b] any problems incurred by the use of the products listed herein.
- 3) The Company prohibits the purchaser of its products to exercise or use the intellectual property rights, industrial property rights, or any other rights that either belong to or are controlled by the Company, other than the right to use, sell, or dispose of the products.

