### **General Description**

The MAX3209E is a complete, dual DTE RS-232 serial port (6 transmitters, 10 receivers) for motherboards and desktop PCs that ensures compliance with the stringent ESD requirements of the European Community. The device minimizes board space and power consumption by eliminating the need for a negative power supply; it integrates two serial ports and a charge pump into a single 38-pin TSSOP package.

The MAX3209E features a 50µA low-power standby mode for compliance with system power-management requirements. During standby, while the device operates from the single +3V to +5.5V logic supply, one receiver on each port remains active, allowing automatic system wake-up when peripheral communications resume.

All transmitter outputs and receiver inputs are protected to ±15kV using IEC 1000-4-2 Air-Gap Discharge, ±8kV using IEC 1000-4-2 Contact Discharge, and ±15kV using the Human Body Model, making the device ideal for use in harsh environments or mission-critical equipment. As a result of its robust charge-pump structure, the MAX3209E guarantees mouse driveability and true RS-232 operation at data rates up to 460kbps, ensuring compatibility with PC-to-PC communication software (such as LapLink<sup>™</sup>).

### **Applications**

**Desktop PCs** 

Motherboards

Instruments

Equipment Requiring IEC 1000-4-2 Compliance

**Telecommunications** 

Network Servers

Typical Operating Circuit appears at end of data sheet. Pin Configurations continued at end of data sheet.

LapLink is a trademark of Traveling Software.

### 

Maxim Integrated Products 1

M/X/M

Supply (+3V to +5.5V)

for System Wake-Up

Enhanced ESD Protection

Low 50µA Standby Current

Small 0.1µF Capacitors

Flow-Through Pinout

Guaranteed Mouse Driveability

No Negative Supply Required

### **Features**

- Two Complete Serial Ports in a Single 38-Pin TSSOP Package

- Requires Only +12V Supply and Logic

One Receiver Active per Port in Standby

♦ 460kbps Data Rate; LapLink Compatible

±8kV—IEC 1000-4-2, Contact Discharge

±15kV—IEC 1000-4-2, Air-Gap Discharge


±15kV—Human Body Model

Operates with Either +3V or +5V Logic

**Ordering Information** PART TEMP. RANGE PIN-PACKAGE

| MAX3209ECUU | 0°C to +70°C   | 38 TSSOP     |  |
|-------------|----------------|--------------|--|
| MAX3209EEUU | -40°C to +85°C | 38 TSSOP     |  |
| MAX3209EEGL | -40°C to +85°C | 6 × 6 40 QFN |  |

## **Pin Configurations**



For pricing, delivery, and ordering information, please contact Maxim/Dallas Direct! at 1-888-629-4642, or visit Maxim's website at www.maxim-ic.com.

#### **ABSOLUTE MAXIMUM RATINGS**

| V <sub>DD</sub>        | 0.3V to +15V                       |
|------------------------|------------------------------------|
| VSTBY                  | -0.3V to +7V                       |
|                        | +0.3V to -15V                      |
| Input Voltages         |                                    |
| T_IN                   | -0.3V to +7V                       |
| R_IN                   | ±30V                               |
| Output Voltages        |                                    |
| T_OUT                  | ±15V                               |
| R_OUT                  | 0.3V to (V <sub>STBY</sub> + 0.3V) |
| Short Circuit Duration |                                    |

| T_OUT (one at a time)<br>R_OUT (one at a time)        |                |
|---|----------------|
| Continuous Power Dissipation ( $T_A = +70^{\circ}C$ ) |                |
| TSSOP (derate 11.8mW/°C above +70°C)                  | 941mW          |
| QFN 6 × 6mm (derate 23.2mW/°C above                   | +70°C)1860mW   |
| Operating Temperature Ranges                          |                |
| MAX3209EC   | 0°C to +70°C   |
| MAX3209EE   | 40°C to +85°C  |
| Storage Temperature Range                             | 65°C to +150°C |
| Lead Temperature (soldering, 10s)                     | +300°C         |

Short-Circuit Duration

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

#### **ELECTRICAL CHARACTERISTICS**

 $(V_{DD} = +10.8V \text{ to } +13.2V, V_{STBY} = +3V \text{ to } +5.5V, C1 = C2 = 0.1\mu\text{F}, T_A = T_{MIN} \text{ to } T_{MAX}$ , unless otherwise noted. Typical values are at  $T_A = +25^{\circ}\text{C}$ ,  $V_{DD} = +12V$ ,  $V_{STBY} = +3.3V$ .)

| PARAMETER                              | SYMBOL | CONDITIONS   |                       | MIN                   | ТҮР  | MAX  | UNITS |  |
|--|--------|--|-----------------------|-----------------------|------|------|-------|--|
| DC CHARACTERISTICS                     |        |  |                       | •                     |      |      |       |  |
| Operating Voltage Range                | VDD    |  |                       | 10.8                  |      | 13.2 | v     |  |
| Operating voltage Range                | STBY   |  |                       | 3                     |      | 5.5  | V V   |  |
| Supply Current                         | IDD    | $V_{DD}$ = +12V, no load, all transmitter inputs at V <sub>STBY</sub> , all receiver inputs at V <sub>STBY</sub> or unconnected    |                       |                       | 0.5  | 1    | mA    |  |
| Supply Current                         | ISTBY  | $V_{DD}$ = 0, $V_{STBY}$ = +3.3V, no load, all transmitter inputs at $V_{STBY}$ , all receiver inputs at $V_{STBY}$ or unconnected |                       |                       | 50   | 100  | μA    |  |
| TRANSMITTER LOGIC INPUTS               | ;      |  |                       |                       |      |      |       |  |
| Input Logic Threshold Low              | VILT   | T_IN   |                       |                       |      | 0.4  | V     |  |
| Input Logic Threshold High             | VIHT   | T_IN, $V_{STBY} = +3V$ to -  | +5.25V                | 2.1                   |      |      | V     |  |
| Input Pull-Up Current                  |        | Transmitter input at GN  | ND                    |                       |      | 25   | μA    |  |
| RECEIVER LOGIC OUTPUTS                 | 1      |  |                       |                       |      |      | •     |  |
| Output Voltage Low                     | Volr   | R_OUT; ISINK = 1.6mA   |                       |                       |      | 0.4  | V     |  |
| Output Voltage High                    | Vohr   | R_OUT<br>ISOURCE = 40µA<br>ISOURCE = 1mA   | ISOURCE = 40µA        | V <sub>STBY</sub> - ( | ).3  |      | V     |  |
| Output voltage riigh                   | VOHR   |  | V <sub>STBY</sub> - ( | ).6                   |      |      |       |  |
| Receiver Output Leakage<br>Current     |        | $V_{DD} = 0, V_{STBY} = 5V$  |                       |                       | 0.05 | ±5   | μA    |  |
| RS-232 TRANSMITTER OUTPU               | its    |  |                       | 1                     |      |      | 1     |  |
| Output Voltage Swing                   |        | All transmitter outputs loaded with $3k\Omega$ to GND  |                       | ±5.0                  |      |      | V     |  |
| RS-232 Output Short-Circuit<br>Current |        | VT_OUT = 0   |                       |                       | ±10  | ±60  | mA    |  |
| Transmitter Output Resistance          |        | $V_{DD} = V_{STBY} = 0, V_{OUT} = \pm 2V$  |                       | 300                   |      |      | Ω     |  |
| RS-232 RECEIVER INPUTS                 | -1     |  |                       | 1                     |      |      | 1     |  |
| Receiver Input Voltage Range           |        |  |                       | -25                   |      | 25   | V     |  |
| RS-232 Input Threshold Low             |        | $T_A = +25^{\circ}C$   |                       |                       |      | 0.4  | V     |  |
| RS-232 Input Threshold High            |        | $T_A = +25^{\circ}C$   |                       | 2.4                   |      |      | V     |  |
| RS-232 Input Hysteresis                |        | V <sub>STBY</sub> = 3.3V   |                       | 0.2                   |      | 1    | V     |  |
| RS-232 Input Resistance                |        | $T_A = +25^{\circ}C$   |                       | 3                     | 5    | 7    | kΩ    |  |


### ELECTRICAL CHARACTERISTICS (continued)


 $(V_{DD} = +10.8V \text{ to } +13.2V, V_{STBY} = +3V \text{ to } +5.5V, C1 = C2 = 0.1\mu\text{F}, T_A = T_{MIN} \text{ to } T_{MAX}$ , unless otherwise noted. Typical values are at  $T_A = +25^{\circ}\text{C}, V_{DD} = +12V, V_{STBY} = +3.3V$ .)

| PARAMETER  | SYMBOL            | CONDITIONS  | MIN | ТҮР | MAX | UNITS |
|--|-------------------|---|-----|-----|-----|-------|
| ESD CHARACTERISTICS                                  |                   | -   |     |     |     |       |
|  |                   | Human Body Model  |     | ±15 |     |       |
| ESD Protection                                       |                   | IEC 1000-4-2 (Contact Discharge)  |     | ±8  |     | kV    |
|  |                   | IEC 1000-4-2 (Air-Gap Discharge)  |     | ±15 |     |       |
| TRANSMITTER TIMING CHARA                             | CTERISTIC         | S (Figure 1)  |     |     |     |       |
| Data Rate  | DR                | $R_L = 3k\Omega$ to $7k\Omega$ , $C_L = 50pF$ to 1000pF, two transmitters switching   | 460 |     |     | kbps  |
| Mouse Driveability                                   |                   | TIN = T2IN = GND, T3IN = $V_{CC}$ ,<br>30UT loaded with 3k $\Omega$ to GND, T10UT and +6<br>20UT loaded with 2.5mA each   |     |     | -5  | V     |
| Transmitter Output Propagation Delay, Low to High    | <b>t</b> PLHT     | C <sub>L</sub> = 1000pF 1   |     |     | μs  |       |
| Transmitter Output Propagation<br>Delay, High to Low | <b>t</b> PHLT     | C <sub>L</sub> = 1000pF   | 1   |     |     | μs    |
|  | SB                | $ \begin{array}{l} R_{L} = 3k\Omega \text{ to } 7k\Omega,  V_{STBY} = 3.3V, \\ C_{L} = 50pF \text{ to } 470pF,  T_{A} = +25^\circC, \\ measured from  +3V \text{ to } \text{-}3V \text{ or } \text{-}3V \text{ to } +3V \end{array} $ | 6   | 12  | 30  | Marc  |
| Transmitter Output Slew Rate                         | SK                | $ \begin{array}{l} R_{L} = 3k\Omega \text{ to } 7k\Omega,  V_{STBY} = 3.3V, \\ C_{L} = 50pF \text{ to } 1000pF,  T_{A} = +25^{\circ}C, \\ measured from  +3V \text{ to } -3V \text{ or } -3V \text{ to } +3V \end{array} $            | 4   | 12  | 30  | V/µs  |
| RECEIVER TIMING CHARACTE                             | RISTICS           | ·   |     |     |     |       |
| Receiver Output Propagation<br>Delay, Low to High    | <sup>t</sup> PLHR | C <sub>L</sub> = 150pF  |     | 0.4 | 1   | μs    |
| Receiver Output Propagation<br>Delay, High to Low    | <sup>t</sup> PHLR | C <sub>L</sub> = 150pF 0.4 1  |     | 1   | μs  |       |


### **Typical Operating Characteristics**

(V<sub>STBY</sub> = +5V, V<sub>DD</sub> = +12V, C1 = C2 = 0.1 $\mu$ F, T<sub>A</sub> = +25°C, unless otherwise noted.)






**MAX3209E** 

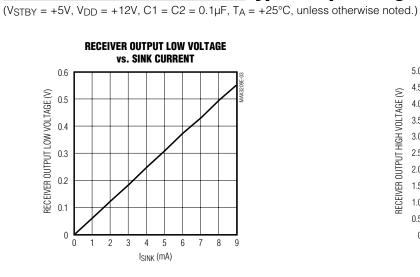





### **Pin Description**

| PI                        | N                | NAME  | FUNCTION   |
|---------------------------|------------------|-------|--|
| TSSOP                     | QFN              | NAME  | FUNCTION   |
| 1–5, 15–19                | 11–15, 36–40     | R_OUT | TTL/CMOS Receiver Outputs  |
| 6, 7, 8, 12, 13,<br>14    | 1, 2, 3, 7, 8, 9 | T_IN  | TTL/CMOS Transmitter Inputs  |
| 9                         | 4                | VSTBY | Standby Power Supply for R5 and R10                                      |
| 10                        | 5                | VDD   | +12V Single-Supply Voltage   |
| 11                        | 6                | C+    | Positive Terminal of the Inverting Charge-Pump Capacitor                 |
| 20–24, 28–34              | 16–20, 31–35     | R_IN  | RS-232 Receiver Inputs   |
| 25, 26, 27, 31,<br>32, 33 | 22, 24, 28, 30   | T_OUT | RS-232 Transmitter Outputs   |
| 28                        | 25               | GND   | Ground (for QFN package, connect the exposed pad and corner tabs to GND) |
| 29                        | 26               | C-    | Negative Terminal of the Inverting Charge-Pump Capacitor                 |
| 30                        | 27               | V-    | -12V Generated by the Inverting Charge Pump                              |
|                           | 10, 21           | N.C.  | No Connection. Not internally connected.                                 |

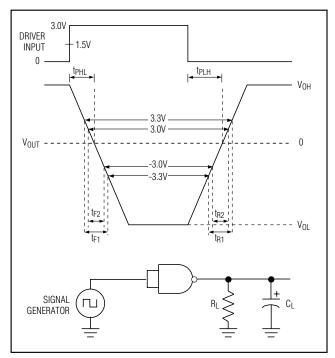


Figure 1. Slew-Rate Test Circuit and Timing Diagram

## **Detailed Description**

#### ±15kV ESD Protection

As with all Maxim devices, ESD-protection structures are incorporated on all pins to protect against electrostatic discharges (ESD) encountered during handling and assembly. The MAX3209E driver outputs and receiver inputs have extra protection against static electricity found in normal operation. Maxim's engineers developed state-of-the-art structures to protect these pins against ±15kV ESD, without damage. After an ESD event, the MAX3209E continues working without latchup.

ESD protection can be tested in several ways. The transmitter outputs and receiver inputs are characterized for protection to the following:

- 1) ±15kV using the Human Body Model
- 2) ±8kV using the Contact-Discharge Method specified in IEC 1000-4-2 (formerly IEC 801-2)
- 3) ±15kV using the Air-Gap Method specified in IEC 1000-4-2 (formerly IEC 801-2)

#### **ESD Test Conditions**

ESD performance depends on a number of conditions. Contact Maxim for a reliability report that documents test setup, methodology, and results.




Figure 2a. Human Body ESD Test Model




Figure 2b. Human Body Model Current Waveform




Figure 3a. IEC 1000-4-2 ESD Test Model

#### Human Body Model

Figure 2a shows the Human Body Model, and Figure 2b shows the current waveform it generates when discharged into a low impedance. This model consists of a 100pF capacitor charged to the ESD voltage of interest,






Figure 3b. IEC 1000-4-2 ESD-Generator Current Waveform

which is then discharged into the device through a  $1.5 \text{k}\Omega$  resistor.

#### IEC 1000-4-2

Since January 1996, all equipment manufactured and/or sold in the European community has been required to meet the stringent IEC 1000-4-2 specification. The IEC 1000-4-2 standard covers ESD testing and performance of finished equipment; it does not specifically refer to integrated circuits. The MAX3209E helps you design equipment that meets Level 4 (the highest level) of IEC 1000-4-2, without additional ESDprotection components.

The main difference between tests done using the Human Body Model and IEC 1000-4-2 is higher peak current in IEC 1000-4-2. Because series resistance is lower in the IEC 1000-4-2 ESD test model (Figure 3a), the ESD withstand voltage measured to this standard is generally lower than that measured using the Human Body Model. Figure 3b shows the current waveform for the  $\pm$ 8kV IEC 1000-4-2 Level 4 ESD Contact-Discharge test.

The Air-Gap test involves approaching the device with a charge probe. The Contact-Discharge method connects the probe to the device before the probe is energized.

#### Machine Model

The Machine Model for ESD testing uses a 200pF storage capacitor and zero-discharge resistance. It mimics the stress caused by handling during manufacturing and assembly. Of course, all pins (not just RS-232 inputs and outputs) require this protection during manufacturing. Therefore, the Machine Model is less relevant to the I/O ports than are the Human Body Model and IEC 1000-4-2.




Figure 4. MAX3209E in Standby Mode

### **Applications Information**

#### **R5 and R10 Active in Standby Mode**

The MAX3209E is placed in standby mode when V<sub>DD</sub> is not present, provided that V<sub>STBY</sub> remains at +3V to +5.5V. In standby mode, receivers R5 and R10 remain active, consuming 100 $\mu$ A max while unloaded. Standby mode allows activity to be sensed on the serial ports so that main power can be restored by the power-management unit, as shown in Figure 4.

### **Layout Considerations**

Use proper layout to ensure other devices on your board are not damaged in an ESD strike. Currents as

# Table 1. Logic Family Compatibility withVarious Supply Voltages

| SYSTEM POWER-<br>SUPPLY VOLTAGE<br>(V) | V <sub>STBY</sub><br>SUPPLY<br>VOLTAGE<br>(V) | COMPATIBILITY   |
|--|---|---|
| 3.3                                    | 3.3   | Compatible with all CMOS families.  |
| 5                                      | 5   | Compatible with all<br>TTL and CMOS fami-<br>lies.                          |
| 5                                      | 3.3   | Compatible with ACT<br>and HCT CMOS, and<br>with AC, HC, or<br>CD4000 CMOS. |



high as 60A can instantaneously pass into ground, so be sure to minimize the ground-lead return path to the power supply. A separate return path to the power supply is recommend. Trace widths should be greater than 40 mils. Bypass V<sub>DD</sub> and V<sub>STBY</sub> with 0.1 $\mu$ F capacitors as close to the part as possible to ensure maximum ESD protection.

The MAX3209E is not sensitive to power-supply sequencing, and therefore requires no external protection diodes.

#### Interconnection with 3V and 5V Logic

The MAX3209E can directly interface with various 3V and 5V logic families, including ACT and HCT CMOS. See Table 1 for more information on possible combinations of interconnections.


#### Mouse Driveability


The MAX3209E has been specifically designed to power serial mice while operating from low-voltage power supplies. It has been tested with leading mouse brands from manufacturers such as Microsoft and Logitech. The MAX3209E successfully drove all serial mice tested and met their respective current and voltage requirements.

Chip Information

TRANSISTOR COUNT: 774


## Pin Configurations (continued)

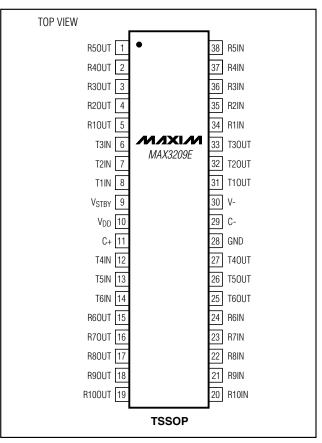

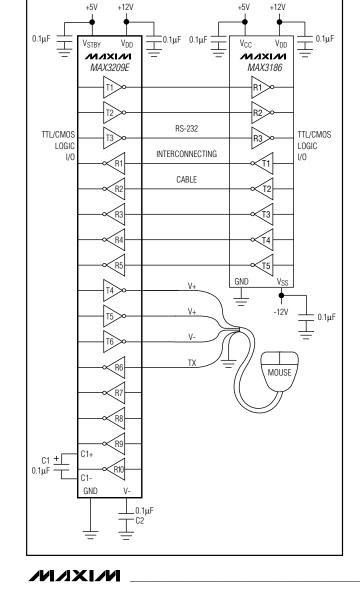

## **Typical Operating Circuit**

DETAIL 'A'

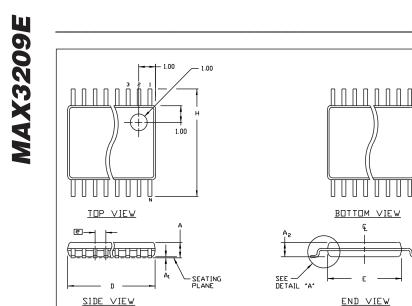

0.25 BSC

NDTES:

òc


1. DIMENSIONS D AND E DO NOT INCLUDE FLASH.


3. CONTROLLING DIMENSION: MILLIMETER. 4. MEETS JEDEC OUTLINE MO-153 ∨ARIATION BD.

i

### **Package Information**

DIMENSIONS

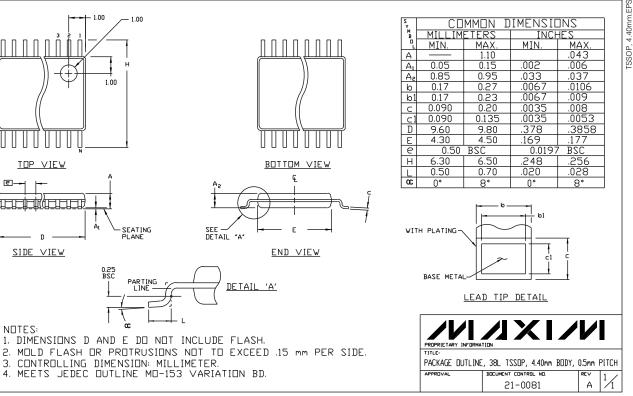

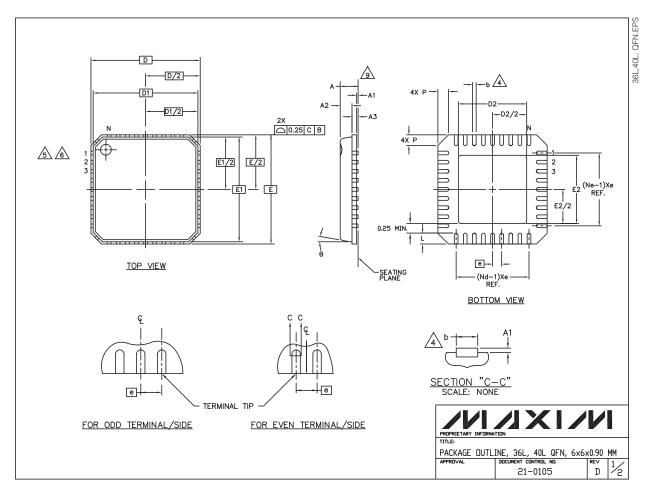

## Package Information (continued)

| TES:  |   |
|---|---|
| <ol> <li>DIE THICKNESS ALLOWABLE IS 0.305mm MAXIMUM (.012 INCHES MAXIMUM)</li> <li>DIMENSIONING &amp; TOLERANCES CONFORM TO ASME Y14.5M 1994.</li> <li>N IS THE NUMBER OF TERMINALS. IN X-DIRECTION &amp; Ne IS THE NUMBER OF TERMINALS IN Y-DIRECTION.</li> <li>DIMENSION &amp; APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.20 AND 0.25mm FROM TERMINAL TIP.</li> <li>THE PIN #1 IDENTFIER MUST BE EXISTED ON THE TOP SURFACE OF THE PACKAGE BY USING INDENTATION MARK OR INK/LASER MARKED.</li> <li>EXACT SHAPE AND SIZE OF THIS FEATURE IS OPTIONAL.</li> <li>ALD DIMENSIONS ARE IN MILLIMETERS.</li> <li>PACKAGE WARPAGE MAX 0.05mm.</li> <li>APPLIED FOR EXPOSED PAD AND TERMINALS. EXCLUDE EMBEDDING PART OF EXPOSED PAD FROM MEASURING.</li> <li>MEETS JEDEC M0220.</li> <li>THIS PACKAGE OUTLINE APPLIES TO ANVIL SINGULATION (STEPPED SIDES) AND TO SAW SINGULATION (STRAIGHT SIDES) QFN STYLES.</li> </ol> | $\begin{array}{c c c c c c c c c c c c c c c c c c c $  |
| PITCH VARIATION C   |   |
| $ \begin{array}{c c c c c c c c c c c c c c c c c c c $   |   |
|   | PROPRIETARY INFORMATION<br>TITLE<br>PACKAGE DUTLINE, 36L, 40L QFN, 6x6x0.90 MM<br>APPROVAL<br>DOCUMENT CONTROL NOL<br>21-0105 D |

Package Information (continued)

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

\_Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 (408) 737-7600

10

**MAXIM** is a registered trademark of Maxim Integrated Products.