PL00875W-WCWW

5W WARM WHITE HIGH POWER LED

< Features >





- *Excellent Transiting Heat from LED Chip Operating under 1500mA
- *High Luminous Output
- *No UV

< Typical Applications >

- *Reading Lights
- *Portable Flashlight
- *Uplighters and Downlighters
- *Garden lighting
- *LCD Backlights/Light Guides
- *General Lighting

Package Dimensions

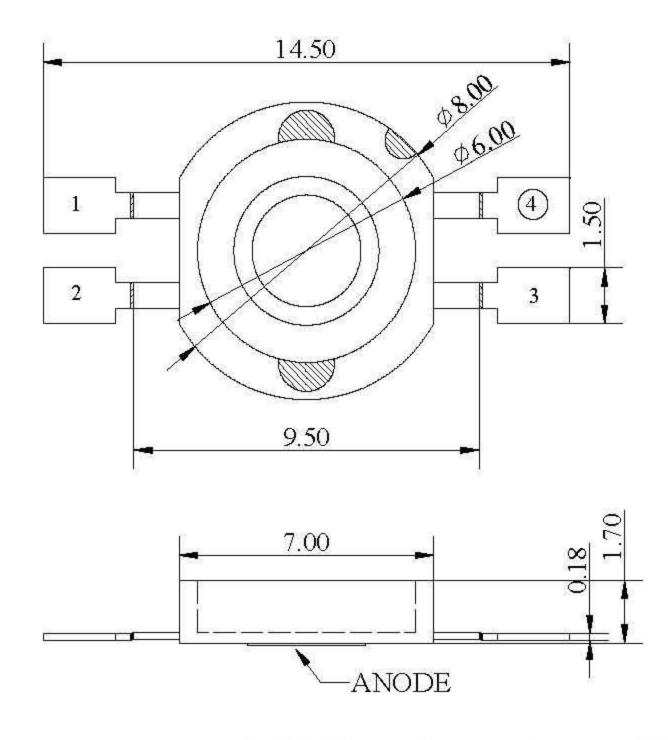




* All dimensions are in mm. *Tolerance: +/-0.25mm.

VER.: 01 Date: 2007/06/22 Page: 1/5

Absolute Maximum Ratings at Ta=25°C ∶

| Parameter | Rating | Unit |
|--|---|------------------------|
| LED Junction Temperature | 120 | °C |
| Reverse Voltage | 5 | V |
| D.C. Forward Current | 1500 | mA |
| Pulsed Forward Current; tp≤100μs,Duty cycle=0.005)*1 | 2000 | mA |
| Operating Temperature Range | -40 to +75 | $^{\circ}\!\mathbb{C}$ |
| Storage Temperature Range | -40 to +105 | $^{\circ}\!\mathbb{C}$ |
| Soldering Temperature | Reflow Soldering: 260°C for Hand Soldering: 350°C for | 20.00 |
| Electric Static Discharge Threshold (HBM) | 6000 | V |

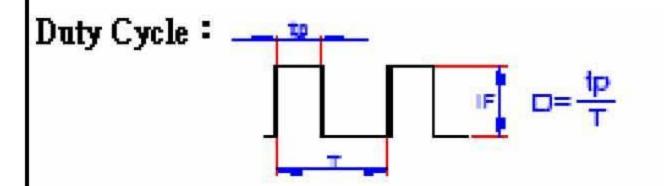

Notes:

- 1 · Proper current derating must be observed to maintain junction temperature below the maximum .
- 2 · All products not sensitive to ESD damage(6000 Volts by HBM condition).
- 3 Be careful with a powered up current limited power supply, because of current spikes during power up and/or connection. Best practice is to connect the LED then turn up the voltage gradually. People building their own power supplies should design for minimum current spikes during power up and connection.
- 4 For best results the customer needs to provide proper control of the thermal path ,protect against electrical overstress conditions, and ensure that emitters are properly attached to the mcpcb/heat sink.

VER.: 01 Date: 2007/06/22 Page: 2/5

PL00875W-WCWW

Characteristics at If=1500mA, Vr=5V (Ta=25°C):

| Parameter | | Symbol | Values | | | T 1 : 4 |
|--|----------|-------------------------------|--------|------------------|-----------|---------|
| | | | Min. | Тур. | Max. | Units |
| Luminous Flux | FULL | Φv | 113 | 150 | 248 | lm |
| | Rank V | | 113 | | 147 | |
| | Rank W | | 147 | | 191 | |
| | Rank X | | 191 | | 248 | |
| Forward voltage | FULL | VF | 2.7 | 3.3 | 4.25 | V |
| | Rank V01 | | 2.7 | | 3.0 | |
| | Rank V02 | | 3.0 | | 3.25 | |
| | Rank V03 | | 3.25 | | 3.5 | |
| | Rank V04 | | 3.5 | = 1-12 = 1-22 | 3.75 | |
| | Rank V05 | | 3.75 | | 4.0 | |
| | Rank V06 | | 4.0 | | 4.25 | |
| | FULL | ССТ | 2700 | 3200 | 3700 | |
| Correlated Colour Temperature | Rank W | | 2700 | | 3200 | ° K |
| | Rank X | | 3200 | | 3700 | |
| Thermal Resistance Junction to Case | | $ m R	heta_{J-C}$ | | 10 | | °C/W |
| Temperature Coefficient of Forward Voltage | | $\triangle V_{F}/\triangle T$ | | -2 | :=- | mV/°C |
| Reverse Current | | I_R | | | 50 | μΑ |
| Viewing angle at 50% IV | | 2 <i>θ</i> 1/2 | | 120 | (| Deg. |

Notes:

- 1. Flux is measured with an accuracy of $\pm 15\%$.
- 2. Forward voltage is measured with an accuracy of ± 0.15 V.
- 3.CCT selection acc.to CCT groups and an accuracy of ±300° K.

VER.: 01 Date: 2007/06/22 Page: 3/5



Typical Electrical/Optical Characteristic Curves

(25°C Ambient Temperature Unless Otherwise Noted)



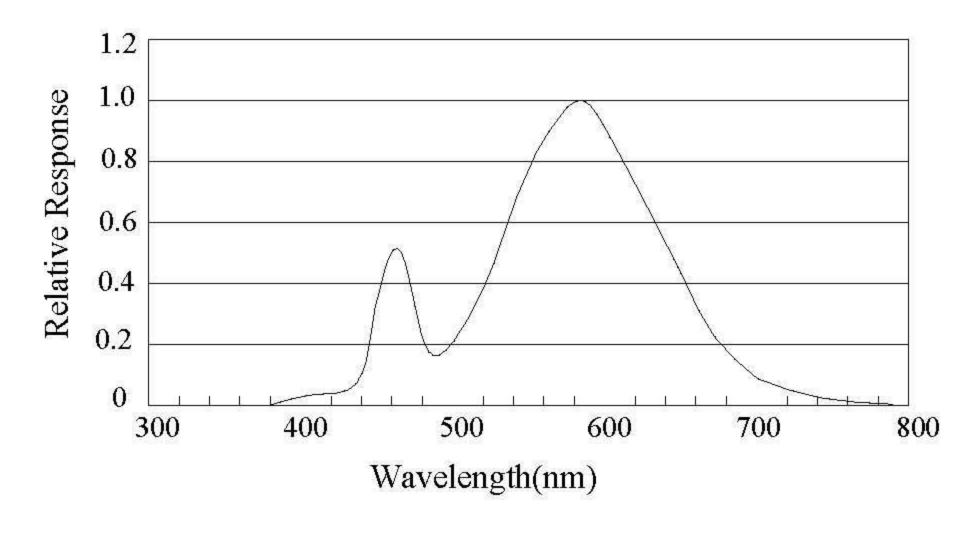



Fig.1 WHITE LED Spectrum VS. WAVELENGTH

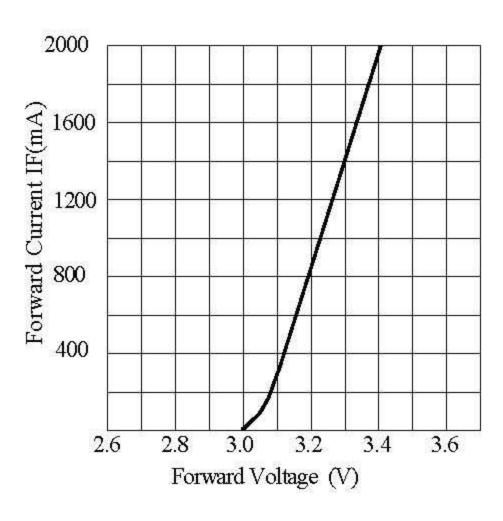


Forward Current VS. Applied Voltage

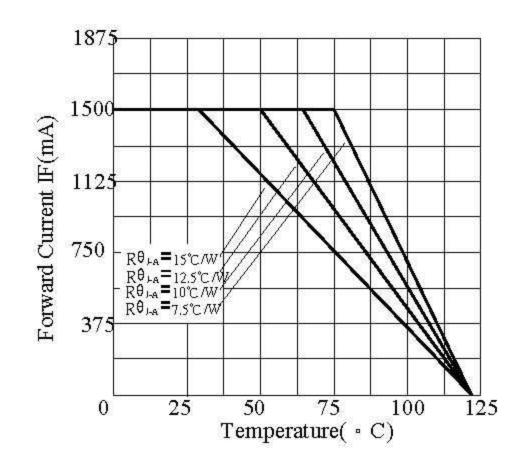

Ambient Temperature VS. Forward Current

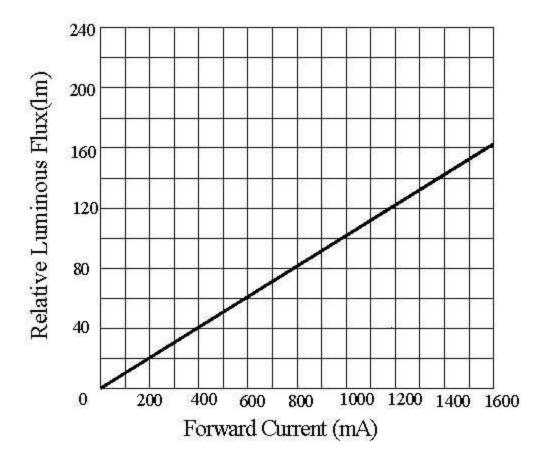

Forward Current VS. Luminous Flux

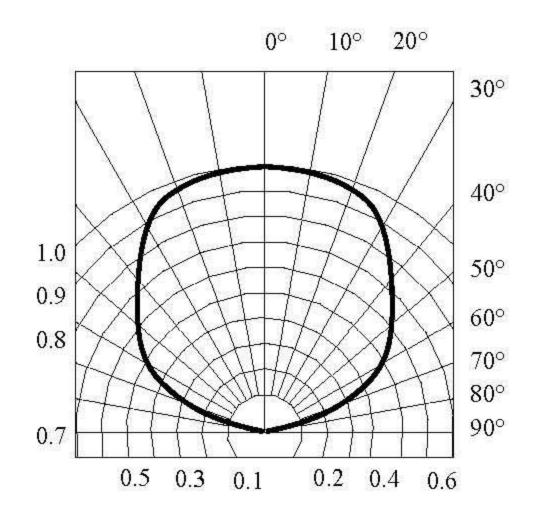

Radiation Diagram

VER.: 01 Date: 2007/06/22 Page: 4/5

PRECAUTION IN USE

Storage

Recommended storage environment

 $5^{\circ}C \sim 30^{\circ}C (41^{\circ}F \sim 86^{\circ}F)$ Temperature:

Humidity: 60% RH Max.

Use within 7 days after opening of sealed vapor/ESD barrier bags.

If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment: 60±5°C for 24 hours.

Fold the opened bag firmly and keep in dry environment.

Soldering

| Reflow Soldering | | | Hand Soldering | | |
|------------------|---------------------------|---------------------------|----------------|--|--|
| | Lead Solder | Lead – free Solder | | | |
| Pre-heat | 120~150℃ | 180~200℃ | Temperature | 350℃ Max. | |
| Pre-heat time | 120sec. Max. | 120sec. Max. | Soldering time | 3sec. Max. | |
| Peak temperature | 240°C Max. | 260°C Max. | 57.88 | (one time only) | |
| Soldering time | 10sec. Max. | 10sec. Max. | | App. Weeks apply to the control of t | |
| Condition | refer to | refer to | | | |
| | Temperature- profile 1 | Temperature- profile 2 | | | |


^{*}After reflow soldering rapid cooling should be avoided.

[Temperature-profile (Surface of circuit board)]

Use the conditions shown to the under figure.


<1: Lead Solder>



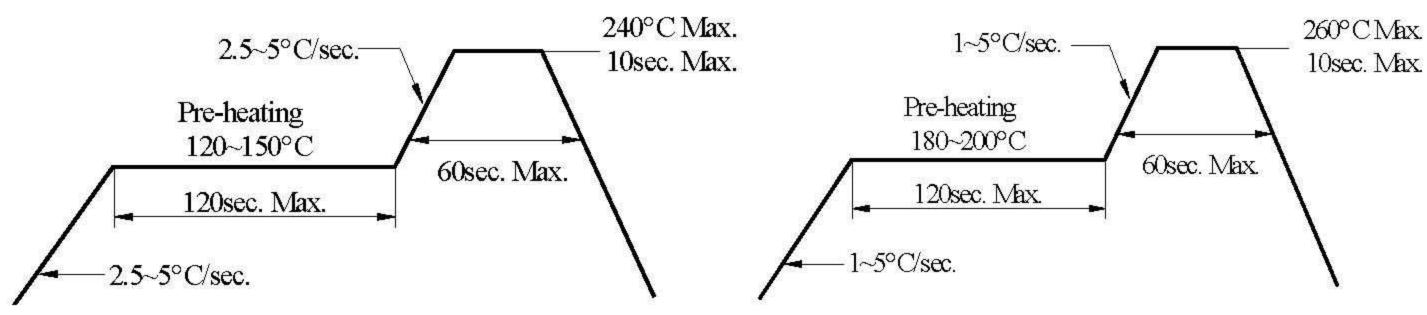

Recommended soldering pad design]

Use the following conditions shown in the figure.

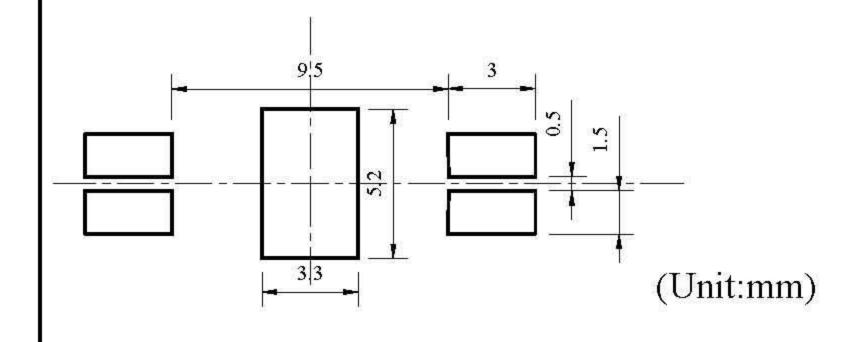

Page: 5/5 **VER.:** 01 Date: 2007/06/22