


Analog 4-wire PET-On-Glass Touch Screen Specification

1. Mechanical Dimensions and Construction

- 1.1 General: Analog Resistive touch screen is laminated by ITO PET to ITO glass.
- 1.2 Construction :

Item	Description	Material	Remarks
	ITO PET	0.188mm ITO PET	Antiglare coating
1	(Top layer)	Film	Surface hardness: 3H
			Resistance:300~600Ω/□
2	ITO Patterned Glass (Bottom layer)	1.10mm ITO Glass	Resistance:300~600Ω/□
3	Tail Base	Kapton	Separated Tail
4	Tail Coverlay	Kapton	
5	Conductor	Copper	
6	Top layer circuit	Silver ink	
7	Bottom layer circuit	Silver ink	
8	Layer to layer contacted	Silver ink	
9	Dot spacer	UV Cure ink	
10	Isolation Layer	Isolation Adhesive	
11	Stiffener	Polyester	

Touch screen side view:

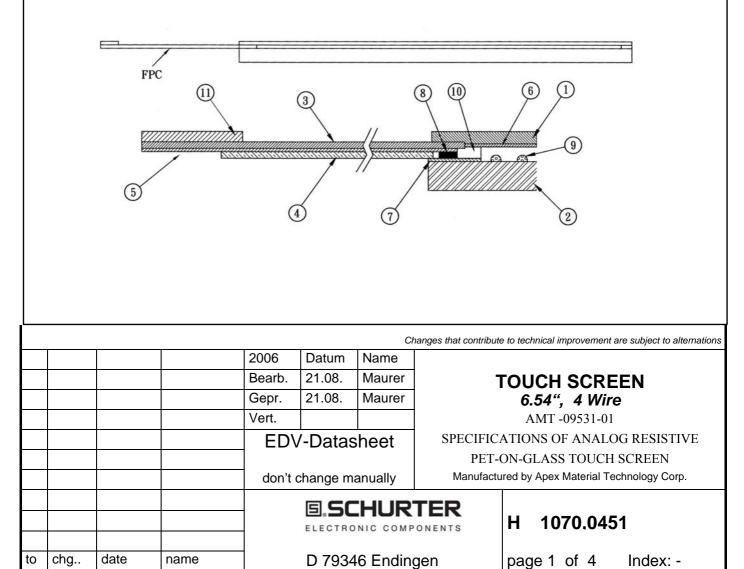



1.3 Input Method and Activation Force

Input Method	Average Activation Force
1.6mm Ø Delrin stylus	0,10 ~ 0,70 N
16mm Ø Silicon "finger"	0,10 ~ 0,70 N

2. Typical Optical Characteristics

2.1	Visible Light Transmission:	> 80%
2.2	Haze:	< 12%

3. Electrical Specifications

	Operating Voltage:	5.5V or less
3.2	Contact current:	20mA (maximum)
3.3	Circuit close resistance:	$X: 500 \sim 1200 \Omega$ $Y: 150 \sim 550 \Omega$
3.4	Circuit open resistance:	$> 10 M\Omega$ at 25VDC
3.5	Contact bounce:	< 10ms
3.6	Linear Test :	<1.5 %
3.7	Capacitance:	100nF(maximum)

4. Linearity

4.1 Linear Test Specification

Direction X: <1.5 % Direction Y: <1.5 %

5. Environment Specification

5.1	Operating Temperature	- 30° C ~ + 85° C	Humidity less than 90% RH
5.2	Storage Temperature	- 40° C \sim + 85° C	at Ambient Humidity

					Н	1070.0	945 [°]	1	
			SCHURTER						
		don't d	-			PET-ON-GLASS TOUCH SCREEN Manufactured by Apex Material Technology Corp.			
		ED\	/-Datas	lasheel				S OF ANALOG RESISTIVE	
		Vert.			AMT -09531-01				
		Gepr.	21.08.	Maurer					
		Bearb.	21.08.	Maurer	TOUCH SCREEN				
		2006	Datum	Name					



6. Reliability Test

6.1 Exposure to high temperature

Touch panel is put into a test machine at the condition of 85° C for 120 hours. Then it is left at the room temperature for 24 hours or more. The measurement must satisfy the following:

- Circuit close resistance: as Sec. 3.3
- Circuit open resistance: as Sec. 3.4
- Contact bounce: as Sec. 3.5
- Linearity test: as Sec. 3.6

6.2 Exposure to low temperature

Touch panel is put into a test machine at the condition of -40° C for 120 hours. Then it is left at the room temperature for 24 hours or more. The measurement must satisfy the following:

- Circuit close resistance: as Sec. 3.3
- Circuit open resistance: as Sec. 3.4
- Contact bounce: as Sec. 3.5
- Linearity test: as Sec. 3.6

6.3 Exposure to constant temperature and humidity

Touch panel is put into a test machine at the condition of 60°C, 90%RH for 120 hours. Then it is left at the room temperature for 24 hours or more. The measurement must satisfy the following:

- Circuit close resistance: as Sec. 3.3
- Circuit open resistance: as Sec. 3.4
- Contact bounce: as Sec. 3.5
- Linearity test: as Sec. 3.6

6.4 Thermal Shock

Touch panel is put into a test machine at the condition of -40° C for 30 minutes, and then 80°C for 30 minutes. The process is repeated by 10 cycles. Then it is left at the room temperature for 24 hours or more. The measurement must satisfy the following:

- Circuit close resistance: as Sec. 3.3
- Circuit open resistance: as Sec. 3.4
- Contact bounce: as Sec. 3.5
- Linearity test: as Sec. 3.6

	Changes that contribute to technical improvement are subject to alternations													
				2006	Datum	Name								
				Bearb.	21.08.	Maurer						TOUCH SCREEN		
				Gepr.	21.08.	Maurer								
				Vert.			AMT -09531-01							
				EDV	-Datas	heet	ATIONS OF ANALOG RESISTIVE							
							PET-ON-GLASS TOUCH SCREEN							
				don't change manually			Manufactured by Apex Material Technology Corp.							
				ELECTRONIC COMP				H 1070.0451						
to	chg	date	name		D 7934	6 Ending	gen	page 3 of 4 Index: -						



7. Durability test:

7.1 Finger touches

Touch panel is hit 10 millions times with a silicone rubber of R8 finger, hitting rate is by 250g at 2 times per second. The measurement must satisfy the following:

- Circuit close resistance: as Sec. 3.3
- Circuit open resistance: as Sec. 3.4
- Contact bounce: as Sec. 3.5
- Linearity test: as Sec. 3.6

7.2 Stylus writing

Touch panel is drawn by R 0,8 Derlin stylus pen, at 250g forces, repeat one inch by 100K times. The measurement must satisfy the following:

- Circuit close resistance: as Sec. 3.3
- Circuit open resistance: as Sec. 3.4
- Contact bounce: as Sec. 3.5
- Linearity test: as Sec. 3.6

8. Optical Performance

8.1 Optical inspection method and optical defect standards refer to document. A001-1 Touch Screen Optical Quality Standard.

8.2 Outside to Viewing Area : any optical defected in this area need to be ignored if no effected to touch screen function.

8.3 Silver Bus Pattern defect : Voids in traces to be less than 50% of the trace width.

8.3.1 Silver Bus Pattern gap: >0.1mm

8.3.2 Silver Bus and Active area gap: No silver ink may project beyond the viewing area.

8.4 Glass defects such as edge chips and scratches refer to A001-1 Touch Screen Optical Quality Standard.

8.5 Others

- 8.5.1 Folding line should be avoided on the pressure sensitive adhesive.
- 8.5.2 Refer to document A001-1 Touch Screen Optical Quality Standard.
- 8.5.3 Always store the touch screen in its original shipping container under normal conditions (20~25°C, 65% RH)

	Changes that contribute to technical improvement are subject to alternations										
				2006	Datum	Name					
				Bearb.	21.08.	Maurer	ICOCHISCILLI				
				Gepr.	21.08.	Maurer					
				Vert.			AMT -09531-01				
				EDV	-Datas	heet	SPECIFICATIONS OF ANALOG RESISTIVE				
							PET-ON-GLASS TOUCH SCREEN				
				don't change manually			Manufactured by Apex Material Technology Corp.				
						HUR	TED				
						NIC COMP			1		
							an a				
to	chg	date	name		D 7934	6 Ending	gen	page 4 of 4	Index: -		