


# Lowpass Filter

KR Model  
2289-75


## Passband Amplitude

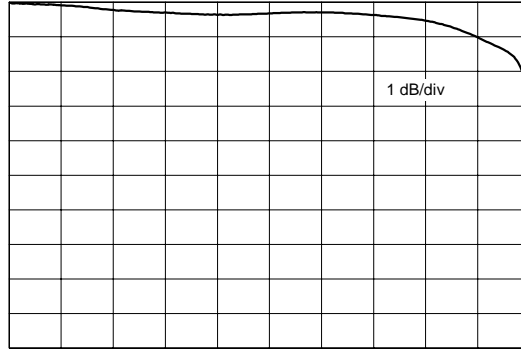

30 KHz

75 MHz

## Overall Amplitude

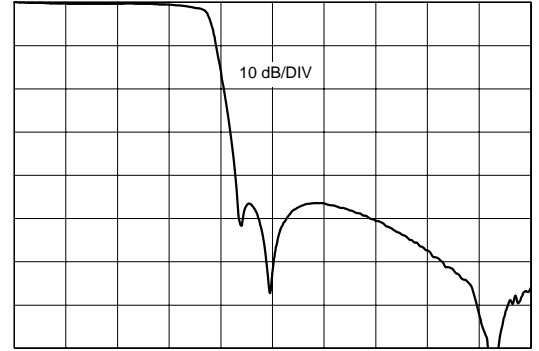


30 KHz

200 MHz

## Specifications

<b>KR Part Number</b>	<b>2289-75</b>
<b>Filter Type</b>	Lowpass
<b>Insertion Loss</b>	< 1 dB
<b>End of Passband &lt; 4 dB</b>	75 MHz
<b>Start of Stopband &gt;45 dB</b>	87 MHz
<b>Source and Load Impedance</b>	50 Ω

## Outline Drawing

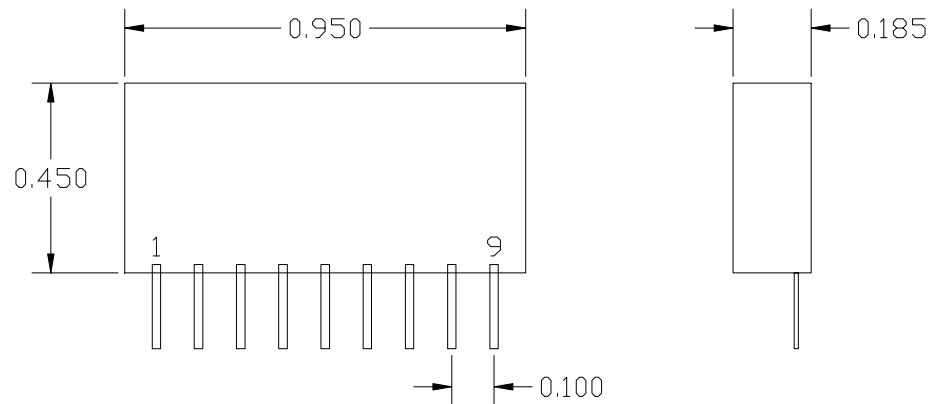

**KR Electronics**  
www.krfilters.com  
91 Avenel Street  
Avenel, NJ 07001  
732-636-1900

PIN 1 - INPUT  
PIN 9 - OUTPUT  
PIN 2 THRU 8 - GROUND  
UNIT IS UNENCAPSULATED - PARTS ARE EXPOSED