**CLV0575A** 

Rev B2

14118 Stowe Drive, Suite B | Poway, CA 92064 TEL: (858) 621-2700 | FAX: (858) 486-1927 URL: www.zcomm.com EMAIL: applications@zcomm.com


## Voltage-Controlled Oscillator Surface Mount Module

## **Applications**

- Wireless Radios
- Basestations
- Mobile Communications

## **Application Notes**

- AN-101: Mounting and Grounding
- AN-102: Output Loading
- AN-107: Manual Soldering

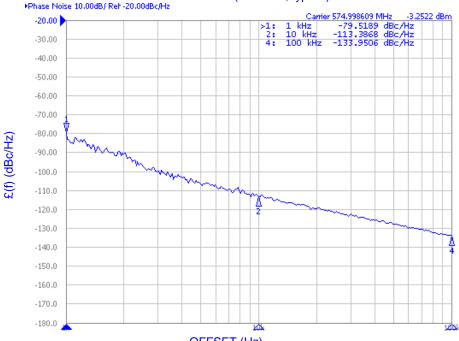

PHASE NOISE (1 Hz BW, typical)


OFFSET (Hz)


Performance Specifications	Min	Тур	Max	Units		
Oscillation Frequency Range	560		590	MHz		
Phase Noise @ 10 kHz offset (1 Hz BW)		-113		dBc/Hz		
Harmonic Suppression (2nd)		-15	-12	dBc		
Tuning Voltage	1		4	Vdc		
Tuning Sensitivity (avg.)		23		MHz/V		
Power Output	0	2.5	5	dBm		
Load Impedance		50		$\Omega$		
Input Capacitance			150	pF		
Pushing			1	MHz/V		
Pulling (14 dB Return Loss, Any Phase)			1	MHz		
Operating Temperature Range	-30		80	°C		
Package Style	MINI-14S-UL					


Power Supply Requirements	Min	Тур	Max	Units
Supply Voltage (Vcc, nom.)		5		Vdc
Supply Current (Icc)		25	30	mA

## **Additional Notes**



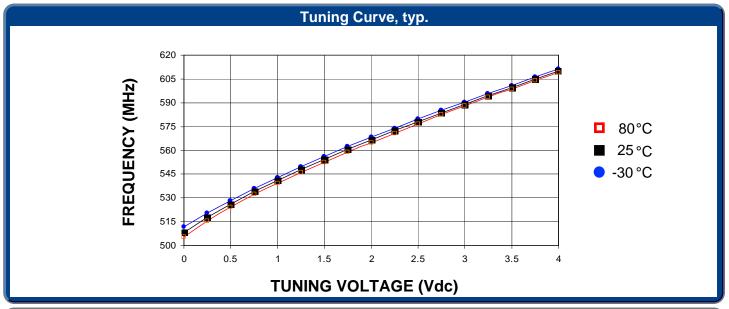

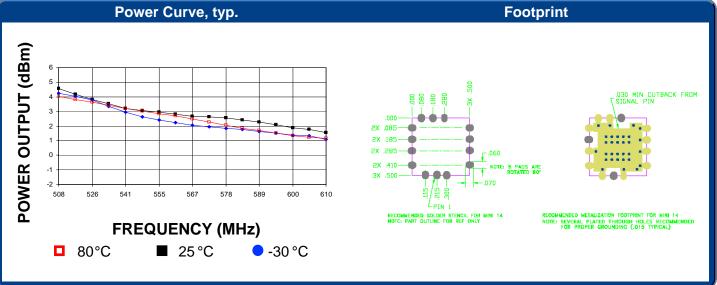

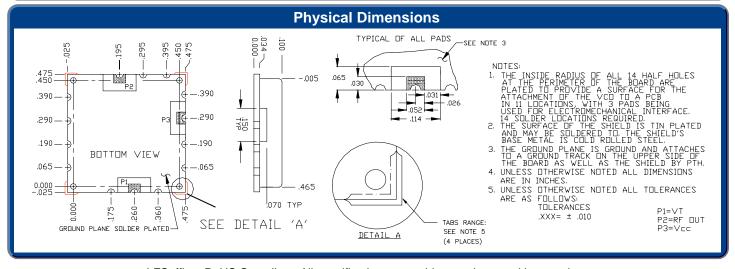

LFSuffix = RoHS Compliant. All specifications are subject to change without notice.