
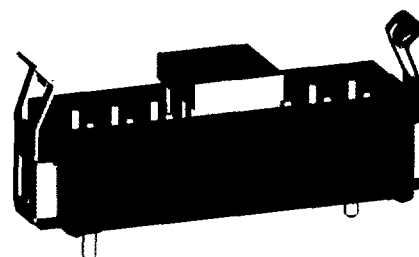
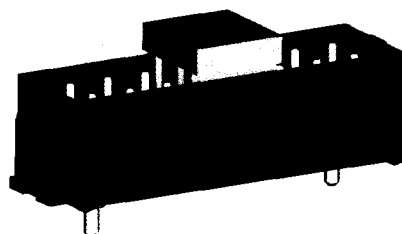


DATAMATE - 2mm PITCH

Surface Mount Male Connectors


- With pick and place pad
- Locating pegs to facilitate location on pcb
- Packed in tubes, contact Technical sales for Tape and Reel packaging

Recommended
PCB Pattern




Latched

No of Ways	A	B	Order Code	
			Tin	Gold
2+2	7.6	2.0	M80-6460406	M80-6460405
3+3	9.6	4.0	M80-6460606	M80-6460605
4+4	11.6	6.0	M80-6460806	M80-6460805
5+5	13.6	8.0	M80-6461006	M80-6461005
6+6	15.6	10.0	M80-6461206	M80-6461205
7+7	17.6	12.0	M80-6461406	M80-6461405
8+8	19.6	14.0	M80-6461606	M80-6461605
9+9	21.6	16.0	M80-6461806	M80-6461805
10+10	23.6	18.0	M80-6462006	M80-6462005
13+13	29.6	24.0	M80-6462606	M80-6462605
17+17	37.6	32.0	M80-6463406	M80-6463405
22+22	47.6	42.0	M80-6464406	M80-6464405

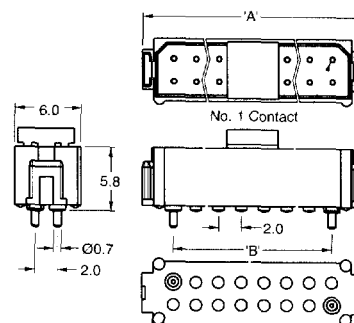


Unlatched

No of Ways	A	B	Order Code	
			Tin	Gold
2+2	8.1	2.0	M80-6470406	M80-6470405
3+3	10.1	4.0	M80-6470606	M80-6470605
4+4	12.1	6.0	M80-6470806	M80-6470805
5+5	14.1	8.0	M80-6471006	M80-6471005
6+6	16.1	10.0	M80-6471206	M80-6471205
7+7	18.1	12.0	M80-6471406	M80-6471405
8+8	20.1	14.0	M80-6471606	M80-6471605
9+9	22.1	16.0	M80-6471806	M80-6471805
10+10	24.1	18.0	M80-6472006	M80-6472005
13+13	30.1	24.0	M80-6472606	M80-6472605
17+17	38.1	32.0	M80-6473406	M80-6473405
22+22	48.1	42.0	M80-6474406	M80-6474405




With Friction Lock

No of Ways	A	B	Order Code	
			Tin	Gold
2+2	8.1	2.0	M80-6480406	M80-6480405
3+3	10.1	4.0	M80-6480606	M80-6480605
4+4	12.1	6.0	M80-6480806	M80-6480805
5+5	14.1	8.0	M80-6481006	M80-6481005
6+6	16.1	10.0	M80-6481206	M80-6481205
7+7	18.1	12.0	M80-6481406	M80-6481405
8+8	20.1	14.0	M80-6481606	M80-6481605
9+9	22.1	16.0	M80-6481806	M80-6481805
10+10	24.1	18.0	M80-6482006	M80-6482005
13+13	30.1	24.0	M80-6482606	M80-6482605
17+17	38.1	32.0	M80-6483406	M80-6483405
22+22	48.1	42.0	M80-6484406	M80-6484405

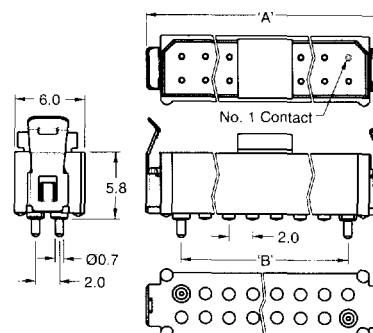


DATAMATE - 2mm PITCH

Surface Mount Female Connectors

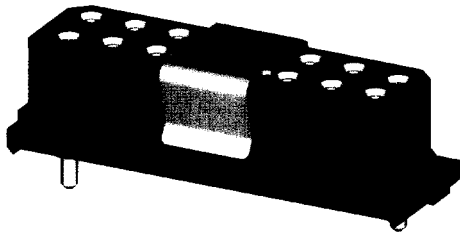


- With pick and place pad
- Locating pegs to facilitate location on pcb
- Packed in tubes, contact Technical sales for Tape and Reel packaging

Recommended
PCB Pattern



Unlatched

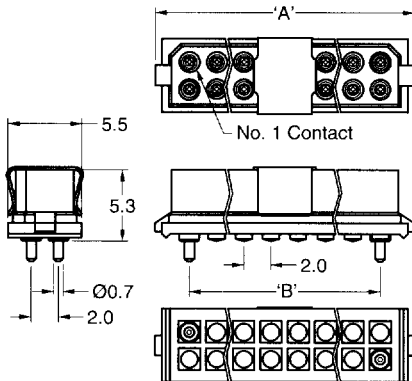


No of Ways	A	B	Order Code	
			Tin	Gold
2+2	7.3	2.0	M80-6970406	M80-6970405
3+3	9.3	4.0	M80-6970606	M80-6970605
4+4	11.3	6.0	M80-6970806	M80-6970805
5+5	13.3	8.0	M80-6971006	M80-6971005
6+6	15.3	10.0	M80-6971206	M80-6971205
7+7	17.3	12.0	M80-6971406	M80-6971405
8+8	19.3	14.0	M80-6971606	M80-6971605
9+9	21.3	16.0	M80-6971806	M80-6971805
10+10	23.3	18.0	M80-6972006	M80-6972005
13+13	29.3	24.0	M80-6972606	M80-6972605
17+17	37.3	32.0	M80-6973406	M80-6973405
22+22	47.3	42.0	M80-6974406	M80-6974405

Separator Tool

Recommended for unplugging latched connectors (tool releases the latches prior to disengagement). Can also be used with unlatched and friction lock connectors. Suitable for all sizes.

Order Code T5746



For full Datamate range, please see Mainline Catalogue, CD ROM or Website.