



WILLAS



PNP Digital Transistor

DTA144EUA

Features


- Pb-Free package is available**

RoHS product for packing code suffix "G"

Halogen free product for packing code suffix "H"

- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors
- The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input. They also have the advantage of almost completely eliminating parasitic effects.
- Only the on/off conditions need to be set for operation, making device design easy

SOT-323


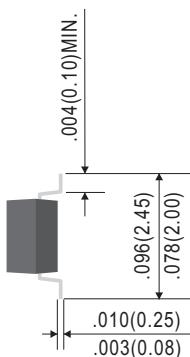


Absolute maximum ratings @ 25°C

| Symbol | Parameter | Min | Typ | Max | Unit |
|---------------------|----------------------|-----|------|-----|------|
| V _{CC} | Supply voltage | --- | -50 | --- | V |
| V _{IN} | Input voltage | -40 | --- | 10 | V |
| I _O | Output current | --- | -30 | --- | mA |
| I _{C(MAX)} | | | -100 | --- | |
| P _d | Power dissipation | --- | 200 | --- | mW |
| T _j | Junction temperature | --- | 150 | --- | °C |
| T _{stg} | Storage temperature | -55 | --- | 150 | °C |


Electrical Characteristics @ 25°C

| Symbol | Parameter | Min | Typ | Max | Unit |
|------------------------------|---|------|-----|-------|------|
| V _{I(off)} | Input voltage (V _{CC} =-5V, I _O =-100 μ A) | -0.5 | --- | --- | V |
| V _{I(on)} | (V _O =-0.3V, I _O =-2mA) | --- | --- | -3.0 | V |
| V _{O(on)} | Output voltage (I _O /I _f =-10mA/-0.5mA) | --- | --- | -0.3 | V |
| I _f | Input current (V _I =-5V) | --- | --- | -0.18 | mA |
| I _{O(off)} | Output current (V _{CC} =-50V, V _I =0) | --- | --- | -0.5 | μ A |
| G _f | DC current gain (V _O =-5V, I _O =-5mA) | 68 | --- | --- | |
| R ₁ | Input resistance | 32.9 | 47 | 61.1 | KΩ |
| R _{2/R₁} | Resistance ratio | 0.8 | 1.0 | 1.2 | |
| f _T | Transition frequency (V _O = -10V, I _O =5mA, f=100MHz) | --- | 250 | --- | MHz |

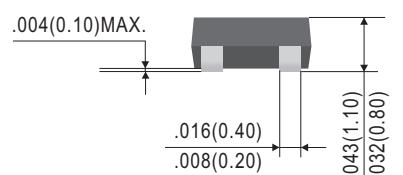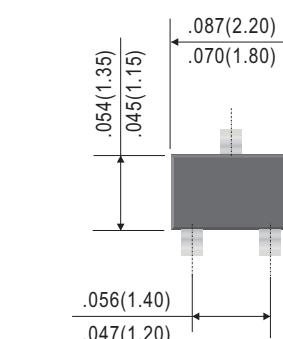


Dimensions in inches and (millimeters) .

● Equivalent circuit

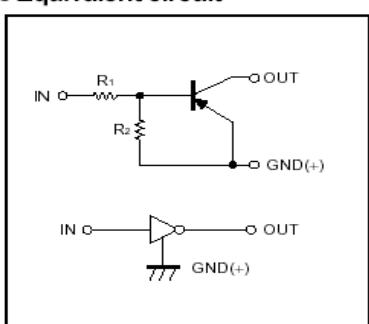

*Marking: 16

Suggested Solder Pad Layout

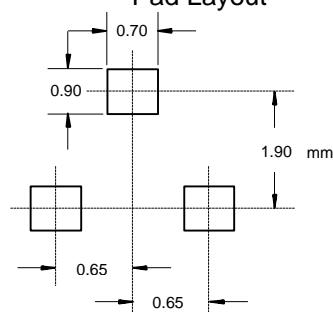

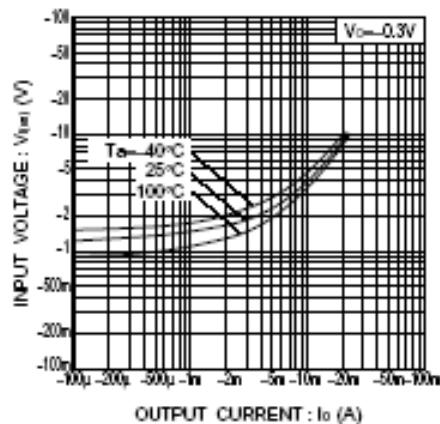


Fig.1 Input voltage vs. output current
(ON characteristics)

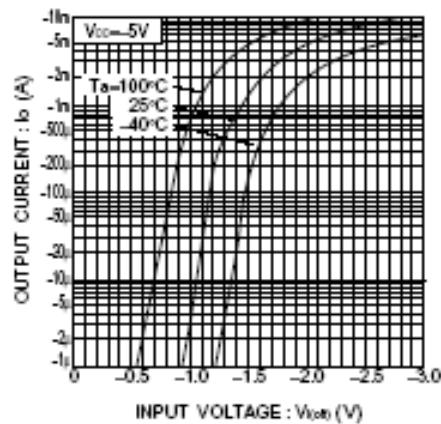


Fig.2 Output current vs. input voltage
(OFF characteristics)

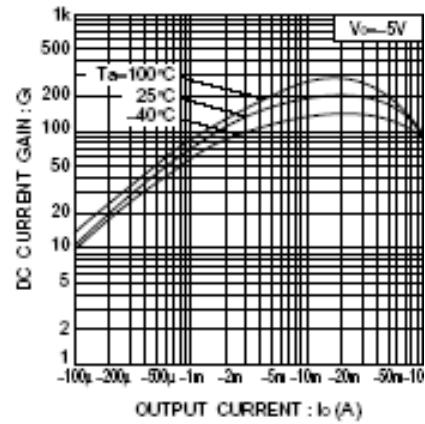


Fig.3 DC current gain vs. output current

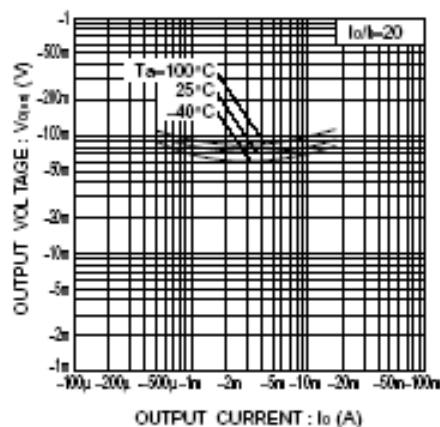


Fig.4 Output voltage vs. output current