



SURFACE GENERAL PURPOSE RECTIFIERS

VOLTAGE 400~1000 Volts CURRENT 1.5 Amperes


FEATURES

- For surface mounted applications
- Ideal for automated placement
- High temperature soldering : 260°C /10 seconds at terminals
- Glass Passivated Chip Junction
- Lead free in comply with EU RoHS 2011/65/EU directives.
- Green molding compound as per IEC61249 Std. . (Halogen Free)

MECHANICAL DATA

- Case: SOD-123FL, Molded plastic over passivated junction
- Terminals : Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.0006 ounces, 0.0173grams
- Standard Packaging: 8mm tape (EIA-481)
- Polarity : Color band cathode



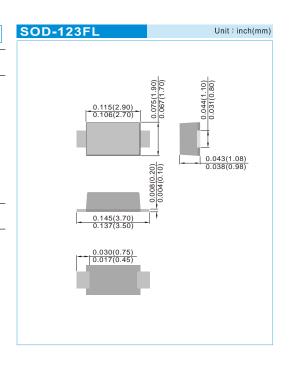

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

PARAMETER	SYMBOL	GS1504FL GS1506FL GS1508FL GS151			GS1510FL	UNITS
Marking Code		2G 2J 2K			2 M	
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	400	600	800	1000	V
Maximum Average Forward Current	I _{F(AV)}	1.5				
Peak Forward Surge Current : 8.3ms single half sine- wave superimposed on rated load (JEDEC method)	I _{FSM}	50				
Maximum Forward Voltage at 1.5A	V _F	1.1				
Maximum DC Reverse Current at Rated DC Blocking Voltage	I _R	1				
Typical Junction Capacitance at 4V, 1MHz	C	10				pF
Typical Junction Resistance (Note 1) (Note 2)	$R_{_{\theta JA}}$	35 200				
Operating and Storage Temperature Range		-55 to +150				

NOTES: 1.Mounted on an FR4 PCB, single-sided copper, with 100cm² copper pad area

2. Mounted on an FR4 PCB, single-sided copper, mini pad.








Fig.1 Forward Current Derating Curve




Fig.2 Typical Junction Capacitance




Fig.3 Typical Reverse Characteristics





Fig.4 Typical Forward Characteristics





MOUNTING PAD LAYOUT

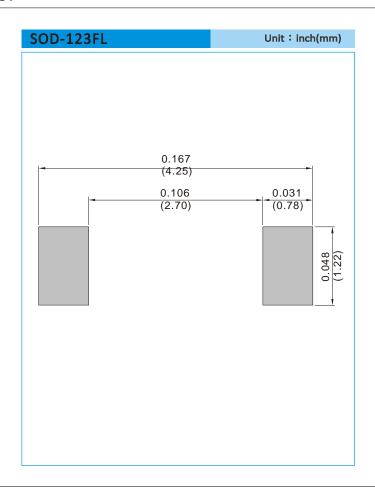

ORDER INFORMATION

• Packing information

T/R - 10K per 13" plastic Reel

T/R - 3K per 7" plastic Reel





Part No_packing code_Version

GS1504FL_R1_00001 GS1504FL_R2_00001

For example :



Packing Code XX					Version Code XXXXX			
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code		
Tape and Ammunition Box (T/B)	Α	N/A	0	HF	0	serial number		
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number		
Bulk Packing (B/P)	В	13"	2					
Tube Packing (T/P)	T	26mm	X					
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y					
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U					
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D					





Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties
 of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation.
 Customers are responsible in comprehending the suitable use in particular applications.
 Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.