




LBS40.960A SAW Filter Electrical Characteristic

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	40.940	40.960	40.980
Insertion Loss	dB		12	15
Q		200		
3 dB Bandwidth	MHz		0.2	
40dBBandwidth	MHz			
Passband variation	dB		0.3	0.7
Phase	degrees	-170		-110
Group Delay Variation	nsec			
Absolute Delay	usec			
Ultimate Rejection	dB	40	45	
Substrate Material		QZ		
Ambient Temperature	° C	25		
Package Size	LMZ-8 (32x18x7.7mm ³)			

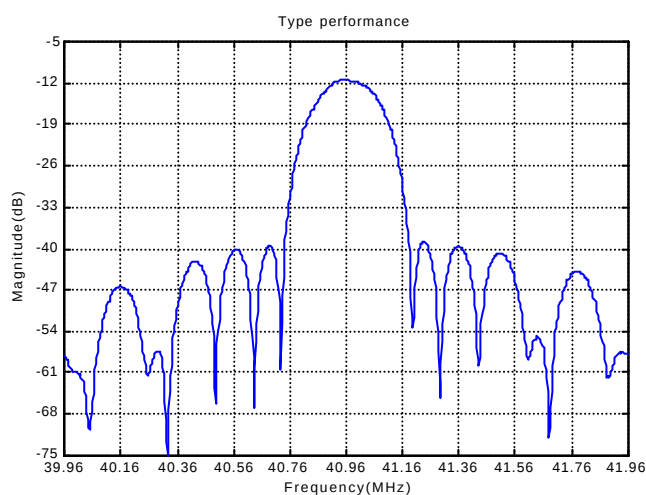

LBS40.960 SAW Filter Typical Performance

