

# KR Electronics

## General Description


KR 2886 is a 110 MHz lowpass filter. The filter has a minimum 1 dB bandwidth of 110 MHz. Other passband frequencies are available. Please consult the factory.

## Features


- 110 MHz Cutoff Frequency
- 50  $\Omega$  Source and Load
- SMA Connectors
- Also available in surface mount

## Typical Performance

**Passband Amplitude & Group Delay**  
(1 dB/div and 5 nsec/div)

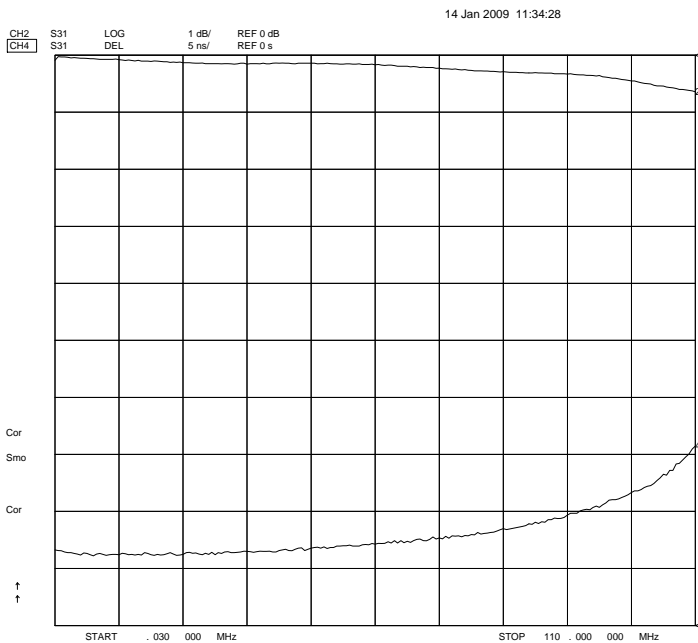

**Overall Response**  
(10 dB/div)

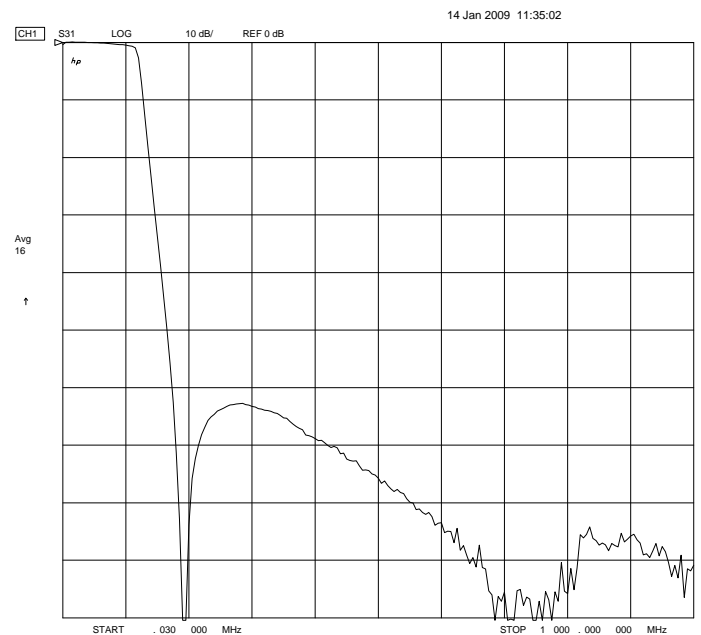

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001



Web [www.krfilters.com](http://www.krfilters.com)  
Email [sales@krfilters.com](mailto:sales@krfilters.com)  
Phone (732) 636-1900  
Fax (732) 636-1982

# KR Electronics 2886

## Specifications

Parameter	Specification
Filter type	Lowpass
Attenuation at 110 MHz	< 1 dB
Attenuation at 180 MHz	> 40 dB (> 60 dB typical)
Source and Load	50 $\Omega$

## Physical Dimensions

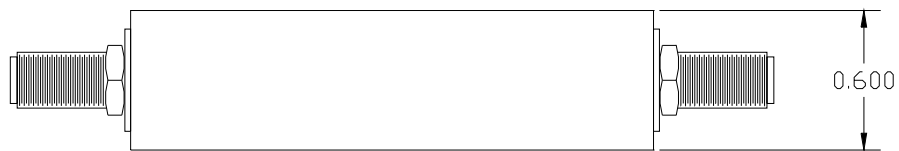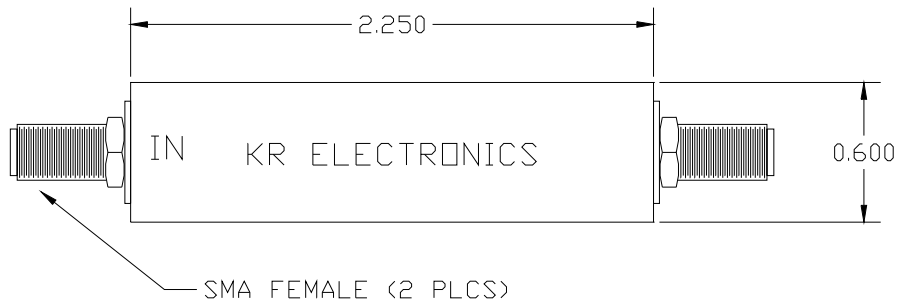

Dimensions in inches  
Metal Case  
Also available in surface mount