

### **Quick Disconnect**



## 880-009P Front Panel Mount Plug with Pigtail Wires



**Shell Size and Insert Arrangements** No. of Contacts #23 Micro Nano Arrangements 5A. 3A. 1A. 7 **B7N C10N** 10 C2M2N 2 2 **D3M** 3 D2W2N 2 2 **E3W** 3 E4M 4 **E19N** 19 E4M4N 4 4 F4W 4 F7M F22N 22 F4M8N 4 8 F4W4N 4 4 G7W 7 **G10M** 10 **G31N** 31 G6M10N 6 10 **G6M12N** 6 12 **H10W** 10 **H37N** 37 **H6W14N** 6 14 **J44N** 44 J7W19N 7 19 **K19M** 19 K13M19N 13 19

First letter of insert arrangement represents connector shell size, as in this example: **K**13M19N

#### NOTES

- 1. See Section A for insert arrangement layouts
- 2. See Section A for additional finish options


Series 880 Quick-Disconnect (QDC) front panel mount plugs are pre-wired and sealed with epoxy. Supplied with jam nut and o-ring. Three contact sizes are available with current ratings of 5A, 3A and 1A. Aluminum or stainless steel housings and thermoplastic insulators. High-strength wire with crosslinked ETFE insulation crimped at factory to high performance contacts. Ultraminiature SuperFly® connectors are ideal for soldier systems and other applications where reduced size and weight are critical.

How To Order									
Sample Part Number		880-009P	A	-B7N	-M	004	J	1	-24
Series	880-009	P							
Insert Style	A = Unshrouded Contacts B = Shrouded Contacts Shrouded contacts are recessed within the insulator								
Shell Size/ Insert Arr.1	See Shell Size and Insert Arrangement Table								
Material/ Finish <sup>2</sup>	M = Aluminum/electroless nickel RoHS compliant  ZR = Aluminum/zinc-nickel, non-reflective with  RoHS compliant black chromate  MT = Aluminum/nickel-PTFE RoHS compliant  ZMT = Stainless steel/nickel-PTFE RoHS compliant								
Wire AWG	See Wire Code Table								
Wire Type	J = "Space Grade" wire M22759/33 or equivalent (ETFE)								
Wire Color	1 = White 5 = Full Color; 1-10 solid color, 11 and up are striped 7 = 10 Color Repeating; Wire #1 black, Wire #11 black, etc								
Wire Length	Overall length ('L') in inches measured from front of connector								

#### **MOD-686 POLARIZING OPTIONS**

Standard SuperFly® connectors have a single master key. Versions with three keys are also available if alternate key positions are required. Add suffix code 686 to the part number per the following example: 880-009PA-B7N-M004J1-24-686A

Plug Alternate Key Positions						
Suffix Code	A°	B°				
686A	150°	210°				
686B	75°	210°				
686C	95°	230°				
686D	140°	275°				
686E	75°	275°				
686F	95°	210°				



#### **MOD-518 OPEN FACE SEALING**

For IP67 performance in open face (unmated) condition, use suffix -518. Example: 880-009PA-B7N-M004J1-24-**518** 

#### SERIES 880



### **Quick Disconnect**




5 Amp #23 Pin


# 880-009P Front Panel Mount Plug with Pigtail Wires

#### **ABOUT SHROUDED AND UNSHROUDED SUPERFLY® CONFIGURATIONS**

Shrouded contacts are recessed within the insert. Unshrouded contacts extend from the insert face. Shrouded inserts contain 1 amp and 3 amp Twistpin contacts along with 5 amp socket contacts. Unshrouded inserts contain 1 amp and 3 amp sockets and 5 amp pin.

Wir	e Code	e Table				
Layouts with 5A. Contacts						
Insert Arrangement	#23 5A.	Micro 3A.	Nano 1A.	Code		
Anangement	#22			100		
E3W, F4W,	#24			200		
G7W, H10W				300		
#26 — — 30 Layouts with 5A. and 1A. Contacts						
Insert	#23	Micro	Nano			
Arrangement	5A.	3A.	1A.	Code		
	#22	_	#28	104		
	#24	_	#28	204		
	#26	_	#28	304		
D2W2N, F4W4N,	#22	_	#30	105		
H6W14N,	#24	_	#30	205		
J7W19N	#26	_	#30	305		
	#22	_	#32	106		
	#24	_	#32	206		
	#26		#32	306		
Layouts with 3A.		cts	"32	300		
Insert	#23	Micro	Nano			
Arrangement	5A.	3A.	1A.	Code		
	_	#24	_	020		
D3M, E4M F7M,	_	#26	_	030		
G10M, K19M, L22M	_	#28	_	040		
LZZIVI	_	#30	_	050		
Layouts with 3A.	and 1	A. Conta	icts	•		
Insert	#23	Micro	Nano	Code		
Arrangement	5A.	3A.	1A.	Code		
	_	#24	#28	024		
	_	#26	#28	034		
C2M2N,	_	#28	#28	044		
E4M4N, F4M8N	_	#24	#30	025		
G6M10N,	_	#26	#30	035		
G6M12N,	_	#28	#30	045		
K13M19N	_	#24	#32	026		
	_	#26	#32	036		
	_	#28	#32	046		
Layouts with 1A. Contacts						
Insert Arrangement	#23 5A.	Micro 3A.	Nano 1A.	Code		
B7N, C10N,	_	_	#28	004		
E19N, F22N,	_	_	#30	005		
G31N, H37N, J44N	_	_	#32	006		

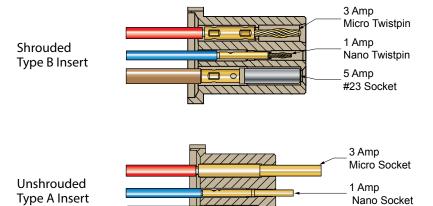

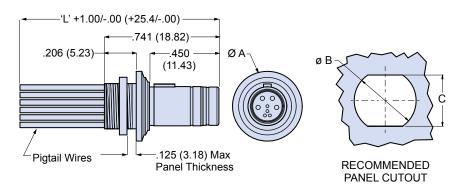

Dimensions							
Shell Size	A Max OD		В Мо	unt Ø	C Flats		
	ln.	mm.	ln.	mm.	ln.	mm.	
В	.392	9.96	.283	7.19	.241	6.12	
С	.412	10.46	.305	7.75	.261	6.63	
D	.432	10.97	.324	8.23	.281	7.14	
E	.451	11.46	.344	8.74	.300	7.62	
F	.471	11.96	.364	9.25	.320	8.13	
G	.490	12.45	.383	9.73	.340	8.64	
Н	.530	13.46	.419	10.64	.379	9.63	
J	.569	14.45	.459	11.66	.418	10.62	
К	.589	14.96	.478	12.14	.438	11.13	
L	.628	15.95	.518	13.16	.478	12.14	