

## Ultra Small Temperature Switches with Pin Selectable Hysteresis


### Features

- 5-Pin SOT-23A
- Factory-programmed Thresholds from -45°C to +125°C in 10°C Increments
- Pin Selectable +2°C or +10°C Hysteresis
- ±0.5°C (Typ) Threshold Accuracy Over Full Temperature Range
- No External Components Required
- 17 µA Supply Current (Typ)

### Applications

- Thermal Management in PCs and Servers
- · Over-temperature Fail-safe Circuits
- Simple Fan Controller
- Temperature Alarms
- Projectors/Printers
- Notebook Computers
- Network Boxes

### **Package Types**

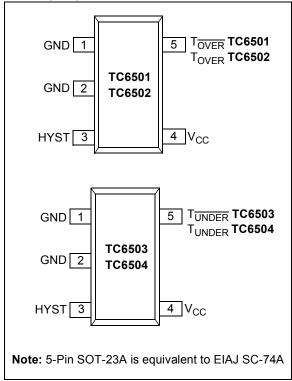

## **General Description**

The TC6501/2/3/4 are SOT-23 temperature switches that require no external components and are available with factory-programmed temperature thresholds. A choice of factory-trimmed temperature trip points are also available. Pin-selectable hysteresis of +2°C or +10°C allows flexibility to the design of the application. These parts typically consume only 17  $\mu$ A of current and operate over the entire -55°C to +135°C temperature range, while offering accuracies of ±0.5°C (typ).

The TC6501 and TC6503 have an open-drain, activelow output, which targets microcontroller reset control. The TC6502 and TC6504 have a CMOS, active-high output designed to drive the logic level MOSFET that turns on a fan or heater element.

The TC6501/TC6502 are designed for hot temperature monitoring (+35°C to +125°C). These devices assert a logic signal when the temperature goes above the threshold. The TC6503/TC6504 are optimized for cold temperature monitoring (-45°C to +15°C) and assert a logic signal when the temperature goes below the threshold.

The TC6501/2/3/4 are offered with five standard temperature thresholds. Available in 5-Pin SOT-23A packages, these parts are ideal for applications requiring high integration, small size, low power and low installed cost.

#### +2.7V to +5.5V 100 pF $\pm$ V<sub>CC</sub> TC6502 T<sub>OVER</sub> GND GND HYST GND HYST

## Functional Block Diagram

## 1.0 ELECTRICAL CHARACTERISTICS

## **Absolute Maximum Ratings\***

Supply Voltage (V $_{CC}$ )0.3V to +7V
Input Current (All Pins)20 mA
Output Current (All Pins)20 mA
Operating Temperature Range 55°C to +135°C
Storage Temperature Range 65°C to +165°C
T <sub>OVER</sub> (TC6501)0.3V to +7V
$T_{\rm OVER}$ (TC6502)0.3V to (V_{\rm CC} + 0.3V)
T <sub>UNDER</sub> (TC6503)0.3V to 7V
$T_{\text{UNDER}}$ (TC6504)0.3V to (V_{CC} + 0.3V)
All Other Pins0.3V to (V_{CC} + 0.3V)
Maximum Junction Temperature, $T_{\rm J}$ 150°C
Power Dissipation (T <sub>A</sub> = +70°C): (Derate 7.1 mW/°C Above +70°C)570 mW

\* **Notice:** Stresses above those listed under "Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of the specifications is not implied. Exposure to maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL SPECIFICATIONS

**Electrical Characteristics:** Unless otherwise noted,  $V_{CC}$  = +2.7V to +5.5V,  $R_{PULL-UP}$  = 100 k $\Omega$  (**TC6501/TC6503** only), 100 pF decoupling capacitor from  $V_{CC}$  to GND,  $T_{AMB}$  = -55°C to +135°C. Typical values are at  $T_A$  = +25°C.

Parameter	Symbol	Min	Тур	Max	Unit	Test Conditions
Supply Voltage Range	V <sub>CC</sub>	2.7	_	5.5	V	
Supply Current	I <sub>CC</sub>	—	17	40	μA	
HYST Input Threshold	V <sub>IH</sub>	0.8 x V <sub>CC</sub>	_	_	V	
HYST Input Threshold	V <sub>IL</sub>	—	_	0.2 x V <sub>CC</sub>	V	
Temperature Threshold Accuracy (Note 1)	$\Delta T_{TH}$	-6	±0.5	6	°C	-45°C to -25°C
		-4	±0.5	4	°C	-15°C to +15°C
		-4	±0.5	4	°C	+35°C to +65°C
		-6	±0.5	6	°C	+75°C to +125°C
Temperature Threshold Hysteresis	T <sub>HYST</sub>	_	2.0	_	°C	HYST = GND
		—	10	_	°C	HYST = V <sub>CC</sub>
Output Voltage High	V <sub>OH</sub>	0.8 x V <sub>CC</sub>	_	_	V	I <sub>SOURCE</sub> = 500 μA, V <sub>CC</sub> > 2.7V ( <b>TC6502/TC6504</b> Only)
		V <sub>CC</sub> - 1.5	_	_	V	I <sub>SOURCE</sub> = 800 μA, V <sub>CC</sub> > 4.5V ( <b>TC6502/TC6504</b> Only)
Output Voltage Low	V <sub>OL</sub>	_	_	0.3	V	I <sub>SINK</sub> = 1.2 mA, V <sub>CC</sub> > 2.7V
		_	_	0.4	V	I <sub>SINK</sub> = 3.2 mA, V <sub>CC</sub> > 4.5V
Open-Drain Output Leakage Current		_	10	_	nA	V <sub>CC</sub> = 2.7V, T <sub>UNDER</sub> = 5.5V (TC6503); T <sub>OVER</sub> = 5.5V (TC6501)

**Note** 1: The **TC6501/2/3/4** are available with internal, factory-programmed temperature trip thresholds from -45°C to +125°C, in +10°C increments.

## 2.0 TYPICAL PERFORMANCE CURVES

- **Note:** The graphs and tables provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore outside the warranted range.
- **Note:** Unless otherwise noted,  $V_{CC} = 5.0V$ ,  $R_{PULL-UP} = 100 \text{ k}\Omega$  (**TC6501/TC6503** only), 100 pF decoupling capacitor from  $V_{CC}$  to GND,  $T_{AMB} = +25^{\circ}C$ .






FIGURE 2-1:

Trip Threshold Accuracy.



**FIGURE 2-2:** Temperature.

Output Sink Resistance vs.



**FIGURE 2-3:** Thermal Step Response in Perfluorinated Fluid (SOT-23).




FIGURE 2-4: Supp Temperature.

Supply Current vs.






FIGURE 2-5: Hysteresis vs. Trip Temperature.



**FIGURE 2-6:** Thermal Step Response in Still Air (SOT-23).

Note: Unless otherwise noted,  $V_{CC}$  = 5.0V,  $R_{PULL-UP}$  = 100 k $\Omega$  (TC6501/TC6503 only), 100 pF decoupling capacitor from  $V_{CC}$  to GND,  $T_{AMB}$  = +25°C.



**FIGURE 2-7:** Output Source Resistance vs. Temperature (TC6502).

## 3.0 PIN DESCRIPTIONS

The descriptions of the pins are listed in Table 3-1.

TC6501	TC6502	TC6503	TC6504	Symbol	Description
1, 2	1, 2	1, 2	1, 2	GND	Ground
3	3	3	3	HYST	Hysteresis Input
4	4	4	4	V <sub>CC</sub>	Supply Input (+2.7V to +5.5V)
5	—	_	—	T <sub>OVER</sub> Open-Drain, Active-Low Output	
—	5	_	—	T <sub>OVER</sub>	Push/Pull Active-High Output
—		5	—	TUNDER	Open-Drain, Active-Low Output
_	_		5	T <sub>UNDER</sub>	Push/Pull Active-High Output

## TABLE 3-1: PIN FUNCTION TABLE

## 3.1 Ground

Connect the device ground pins directly to the PCB ground and minimize the length of the connection. The thermal resistance to the die is at a minimum at Pin 2.

## 3.2 Hysteresis Input (HYST)

Either 2°C (GND) or 10°C (V $_{CC}$ ) of hysteresis is selected by connecting HYST to GND or V $_{CC}.$ 

## 3.3 Supply Input (V<sub>CC</sub>)

A 100 pF or greater decoupling capacitor from  $V_{CC}$  to GND is recommended.

## 3.4 Open-Drain, Active-Low Output (TC6501) (T<sub>OVER</sub>)

The voltage at the  $T_{\overline{OVER}}$  pin is equal to a logic-low level if the sensor detects a temperature that is greater than the factory-programmed threshold temperature. Because this is an open-drain output, an external pullup resistor is required (a 100 k $\Omega$  pull-up resistor is recommended). The voltage on this pin can be higher than V<sub>CC</sub>, though the voltage must not exceed the absolute maximum input voltage of 7.0V.

## 3.5 Push/Pull Active-High Output (TC6502) (T<sub>OVER</sub>)

The voltage at  $T_{\rm OVER}$  is equal to a logic-high level if the sensor detects a temperature greater than the factory-programmed threshold temperature.

## 3.6 Open-Drain, Active-Low Output (TC6503) (T<sub>UNDER</sub>)

The voltage at the T<sub>UNDER</sub> pin is equal to a logic-low level if the sensor detects a temperature that is less than the factory-programmed threshold temperature. Because this is an open-drain output, an external pull-up resistor is required (a 100 k $\Omega$  pull-up resistor is recommended). The voltage on this pin can be higher than V<sub>CC</sub>, though the voltage must not exceed the absolute maximum input voltage of 7.0V

## 3.7 Push/Pull Active-High Output (TC6504) (T<sub>UNDER</sub>)

The voltage at  ${\rm T}_{\rm UNDER}$  is equal to a logic-high level if the sensor detects a temperature less than the factory-programmed threshold temperature.

## 4.0 DETAILED DESCRIPTION

The TC6501/2/3/4 integrate a temperature sensor with a factory-programmed threshold switch (see Functional Block Diagrams in Figure 5-4 through Figure 5-7). A logic signal is asserted when the die temperature crosses the factory-programmed threshold. An external hysteresis input pin allows the user to select either 2°C or 10°C hysteresis to give further flexibility to the design of the application. The TC6501 and TC6502 are intended for a temperature range of 35°C to 125°C in 10°C increments. The TC6501 has an open-drain output, while the TC6502 has a push-pull output stage.

The TC6503 and TC6504 are intended for a cold temperature range of  $-45^{\circ}$ C to  $+15^{\circ}$ C in  $10^{\circ}$ C increments. The TC6503 has an open-drain output, while the TC6504 has a push/pull output stage. The TC6501 and TC6503 are intended for applications with a microcontroller reset input. The TC6502 and TC6504 are intended for applications where a fan or heater element is turned on.

Please contact Microchip Technology for the availability of a particular temperature threshold not included in Table 4-1.

## 4.1 Hysteresis Input

To prevent the output from "chattering" at or near the trip point temperature, a selectable HYST input pin is provided. Hysteresis can be externally selected at 2°C (HYST = GND) or 10°C (HYST =  $V_{CC}$ ) by means of the CMOS compatible HYST input pin. Do not let the HYST pin float, as this could cause an increase in supply current. The hysteresis does not depend on the part's programmed trip threshold.

TABLE 4-1:FACTORY-PROGRAMMEDTHRESHOLD RANGE

Part Number	Threshold (T <sub>TH</sub> ) Range
TC6501	+35°C < T <sub>TH</sub> < +125°C
TC6502	+35°C < T <sub>TH</sub> < +125°C
TC6503	-45°C < T <sub>TH</sub> < +15°C
TC6504	-45°C < T <sub>TH</sub> < +15°C

## 4.2 Thermal Considerations

With a 17  $\mu$ A typical supply current, the TC6501/2/3/4 dissipates very little power. Thus, the die temperature is basically the same as the package temperature. To minimize the error in temperature readings, the load current should be limited to a few milliamps. For example, the typical thermal resistance of a 5-Pin SOT-23A package is 140°C/W. If, for instance, the TC6501 had to sink 1 mA, and the output voltage is ensured to be less than 0.3V, an additional 0.3 mW of power is dissipated within the temperature sensor. This corresponds to a 0.042°C rise in die temperature.

Temperature-monitoring accuracy depends on the thermal resistance between the device being monitored and the temperature switch die. Heat flows primarily through the leads onto the die. Pin 2 provides the lowest thermal resistance to the die. To achieve the best temperature-monitoring results, the TC6501/2/3/4 should be placed closest to the device being monitored. Additionally, a short and wide copper trace from pin 2 to the device should be used. In some cases, the 5-Pin SOT-23A package can be placed directly under the socketed microcontroller for improved thermal contact.

## 5.0 APPLICATIONS

The TC6501 and TC6503 have open-drain outputs and are, therefore, intended to interface as microcontroller reset inputs. Moreover, the combination of these two devices can be used to implement a temperature window alarm by wire-ORing the outputs and using an external pull-up resistor (see Figure 5-1).





FIGURE 5-1: Over and Under Temperature Alarm.

The TC6502 can be used to control a DC fan. The fan turns on when the sensed temperature rises above the factory-set threshold and remains on until the temperature falls below threshold minus the hysteresis selected. An additional fail-safe measure could be designed by using a second TC6502 with a higher temperature threshold to alert the user of an impending thermal shutdown, should the temperature continue to rise (see Figure 5-2).



**FIGURE 5-2:** Fan Control with Over Temperature Alert.

The TC6504, with its push-pull output, may be used in a similar fashion to turn on a heater element at cold temperatures (see Figure 5-3).


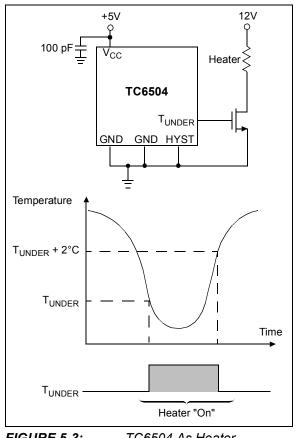



FIGURE 5-3: Thermostat.

TC6504 As Heater



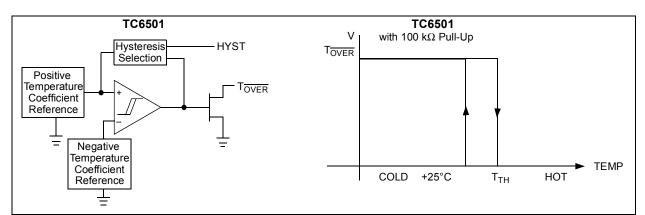


TC6501 Functional Block Diagram.

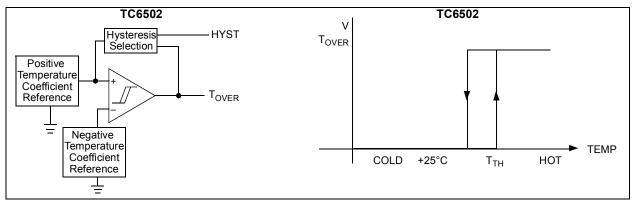




TC6502 Functional Block Diagram.

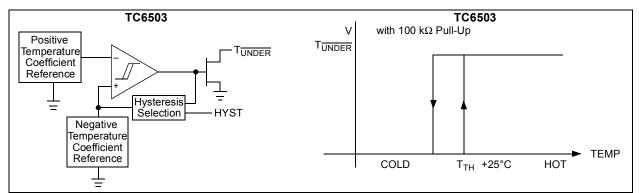



TC6503 Functional Block Diagram.

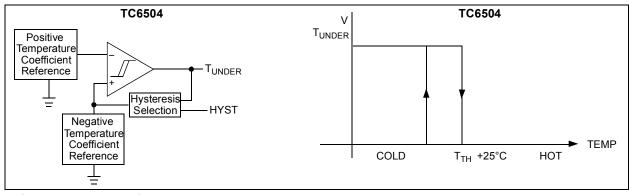




TC6504 Functional Block Diagram.


## 6.0 PACKAGING INFORMATION


## 6.1 Package Marking Diagram

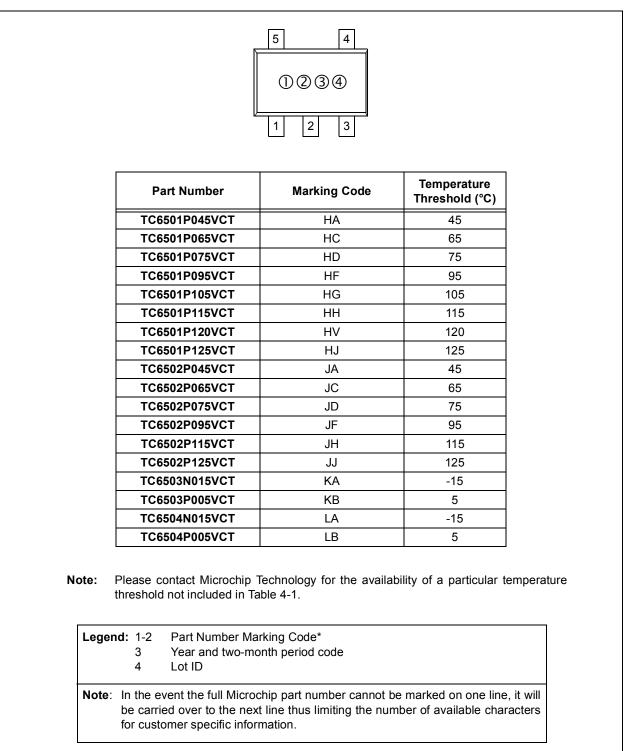



\*Standard OTP marking consists of Microchip part number, year code, week code, and traceability code.

## 5-Lead Plastic Small Outline Transistor (CT) (SOT-23)










	Units	INCHES*			MILLIMETERS		
Dimension	Limits	MIN	NOM	MAX	MIN	NOM	MAX
Number of Pins	n		5			5	
Pitch	р		.038			0.95	
Outside lead pitch (basic)	p1		.075			1.90	
Overall Height	А	.035	.046	.057	0.90	1.18	1.45
Molded Package Thickness	A2	.035	.043	.051	0.90	1.10	1.30
Standoff §	A1	.000	.003	.006	0.00	0.08	0.15
Overall Width	E	.102	.110	.118	2.60	2.80	3.00
Molded Package Width	E1	.059	.064	.069	1.50	1.63	1.75
Overall Length	D	.110	.116	.122	2.80	2.95	3.10
Foot Length	L	.014	.018	.022	0.35	0.45	0.55
Foot Angle	φ	0	5	10	0	5	10
Lead Thickness	С	.004	.006	.008	0.09	0.15	0.20
Lead Width	В	.014	.017	.020	0.35	0.43	0.50
Mold Draft Angle Top	α	0	5	10	0	5	10
Mold Draft Angle Bottom	β	0	5	10	0	5	10

\* Controlling Parameter § Significant Characteristic

Notes:

Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed .010" (0.254mm) per side. JEDEC Equivalent: MO-178 Drawing No. C04-091

## **Product Tape and Reel Specification**

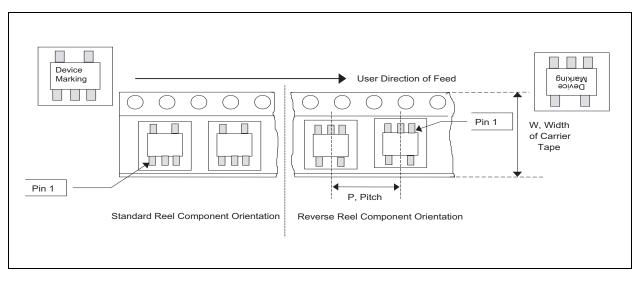

NOTES:

## **PRODUCT IDENTIFICATION SYSTEM**

To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.

<u>PART NO.</u>	<u> </u>	XXXXX	Exa	Examples:				
Device	Standard	Package	a)	TC6501P045VCTTR:	5-Pin SOT-23A, 45°C, Open-Drain, tape and reel.			
	Temperature Threshold		b)	TC6501P065VCTTR:	5-Pin SOT-23A, 65°C, Open-Drain, tape and reel.			
<b></b>			c)	TC6501P095VCTTR:	5-Pin SOT-23A, 95°C, Open-Drain, tape and reel.			
Device:	TC6501 TC6502		d)	TC6501P095VCTRT:	5-Pin SOT-23A, 95°C, Open-Drain, reverse tape and reel.			
	TC6503 TC6504	Hysteresis Ultra Small Temp Switch with Pin-Selectable Hysteresis Ultra Small Temp Switch with Pin-Selectable	e)	TC6501P125VCTRT:	5-Pin SOT-23A, 125°C, Open-Drain, reverse tape and reel.			
	100004	Hysteresis	a)	TC6502P045VCTTR	5-Pin SOT-23A, 45°C, Push-Pull, tape and reel.			
Standard Temperature		= -15°C (TC6503, TC6504) = 5°C (TC6503, TC6504	b)	TC6502P065VCTTR	5-Pin SOT-23A, 65°C, Push-Pull, tape and reel.			
Threshold:	P065	= 45°C (TC6501, TC6502) = 65°C (TC6501, TC6502) = 75°C (TC6501, TC6502)	c)	TC6502P095VCTTR:	5-Pin SOT-23A, 95°C, Push-Pull, tape and reel.			
	P105	= 95°C (TC6501, TC6502) = 105°C (TC6501)	a)	TC6503N015VCTTR	5-Pin SOT-23A, -15°C, Open-Drain, tape and reel			
P	P120	= 115°C (TC6501, TC6502) = 120°C (TC6501) = 125°C (TC6501, TC6502)	b)	TC6503P005VCTTR:	5-Pin SOT-23A, 5°C, Open-Drain, tape and reel			
Package:	VCTTR	= SOT-23, 5-lead (Tape and Reel)	a)	TC6504N015VCTTR:	5-Pin SOT-23A, -15°C, Push-Pull, tape and reel.			
i donago.	VCTRT	<ul> <li>SOT-23, 5-lead (Reverse Tape and Reel) (Available only in 95°C and 125°C temperatures for TC6501)</li> </ul>	b)	TC6504P005VCTTR:	5-Pin SOT-23A, 5°C, Push-Pull, tape and reel.			

## Sales and Support

### Data Sheets

Products supported by a preliminary Data Sheet may have an errata sheet describing minor operational differences and recommended workarounds. To determine if an errata sheet exists for a particular device, please contact one of the following:

- 1. Your local Microchip sales office
- 2. The Microchip Corporate Literature Center U.S. FAX: (480) 792-7277
- 3. The Microchip Worldwide Site (www.microchip.com)

Please specify which device, revision of silicon and Data Sheet (include Literature #) you are using.

### Customer Notification System

Register on our web site (www.microchip.com/cn) to receive the most current information on our products.

NOTES:

### Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication regarding device applications and the like is intended through suggestion only and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. No representation or warranty is given and no liability is assumed by Microchip Technology Incorporated with respect to the accuracy or use of such information, or infringement of patents or other intellectual property rights arising from such use or otherwise. Use of Microchip's products as critical components in life support systems is not authorized except with express written approval by Microchip. No licenses are conveyed, implicitly or otherwise, under any intellectual property rights.

### Trademarks

The Microchip name and logo, the Microchip logo, Accuron, dsPIC, KEELOQ, MPLAB, PIC, PICmicro, PICSTART, PRO MATE and PowerSmart are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.


AmpLab, FilterLab, microID, MXDEV, MXLAB, PICMASTER, SEEVAL, SmartShunt and The Embedded Control Solutions Company are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Application Maestro, dsPICDEM, dsPICDEM.net, dsPICworks, ECAN, ECONOMONITOR, FanSense, FlexROM, fuzzyLAB, In-Circuit Serial Programming, ICSP, ICEPIC, microPort, Migratable Memory, MPASM, MPLIB, MPLINK, MPSIM, PICkit, PICDEM, PICDEM.net, PICtail, PowerCal, PowerInfo, PowerMate, PowerTool, rfLAB, rfPIC, Select Mode, SmartSensor, SmartTel and Total Endurance are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

Serialized Quick Turn Programming (SQTP) is a service mark of Microchip Technology Incorporated in the U.S.A.

All other trademarks mentioned herein are property of their respective companies.

© 2004, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.



## QUALITY MANAGEMENT SYSTEM CERTIFIED BY DNV ISO/TS 16949:2002

Microchip received ISO/TS-16949:2002 quality system certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona and Mountain View, California in October 2003. The Company's quality system processes and procedures are for its PICmicro® 8-bit MCUs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, non-volatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.



## WORLDWIDE SALES AND SERVICE

### AMERICAS

**Corporate Office** 

2355 West Chandler Blvd. Chandler, AZ 85224-6199 Tel: 480-792-7200 Fax: 480-792-7277 Technical Support: 480-792-7627 Web Address: http://www.microchip.com

Atlanta

3780 Mansell Road, Suite 130 Alpharetta, GA 30022 Tel: 770-640-0034 Fax: 770-640-0307

### Boston

2 Lan Drive, Suite 120 Westford, MA 01886 Tel: 978-692-3848 Fax: 978-692-3821

### Chicago

333 Pierce Road, Suite 180 Itasca, IL 60143 Tel: 630-285-0071 Fax: 630-285-0075

### Dallas

4570 Westgrove Drive, Suite 160 Addison, TX 75001 Tel: 972-818-7423 Fax: 972-818-2924

#### Detroit

Tri-Atria Office Building 32255 Northwestern Highway, Suite 190 Farmington Hills, MI 48334 Tel: 248-538-2250 Fax: 248-538-2260

### Kokomo

2767 S. Albright Road Kokomo, IN 46902 Tel: 765-864-8360 Fax: 765-864-8387

Los Angeles 18201 Von Karman, Suite 1090 Irvine, CA 92612 Tel: 949-263-1888 Fax: 949-263-1338

Phoenix 2355 West Chandler Blvd. Chandler, AZ 85224-6199 Tel: 480-792-7966 Fax: 480-792-4338

San Jose 1300 Terra Bella Avenue Mountain View, CA 94043 Tel: 650-215-1444

#### Toronto

6285 Northam Drive, Suite 108 Mississauga, Ontario L4V 1X5, Canada Tel: 905-673-0699 Fax: 905-673-6509

### ASIA/PACIFIC

Australia Suite 22, 41 Rawson Street Epping 2121, NSW Australia Tel: 61-2-9868-6733 Fax: 61-2-9868-6755

China - Beijing

Unit 706B Wan Tai Bei Hai Bldg. No. 6 Chaoyangmen Bei Str. Beijing, 100027, China Tel: 86-10-85282100 Fax: 86-10-85282104

### China - Chengdu

Rm. 2401-2402, 24th Floor, Ming Xing Financial Tower No. 88 TIDU Street Chengdu 610016, China Tel: 86-28-86766200 Fax: 86-28-86766599

China - Fuzhou Unit 28F, World Trade Plaza No. 71 Wusi Road Fuzhou 350001, China Tel: 86-591-7503506

Fax: 86-591-7503521 China - Hong Kong SAR Unit 901-6, Tower 2, Metroplaza

223 Hing Fong Road Kwai Fong, N.T., Hong Kong Tel: 852-2401-1200 Fax: 852-2401-3431

China - Shanghai Room 701, Bldg. B Far East International Plaza No. 317 Xian Xia Road Shanghai, 200051 Tel: 86-21-6275-5700 Fax: 86-21-6275-5060

### China - Shenzhen

Rm. 1812, 18/F, Building A, United Plaza No. 5022 Binhe Road, Futian District Shenzhen 518033, China Tel: 86-755-82901380 Fax: 86-755-8295-1393 **China - Shunde** 

Room 401, Hongjian Building, No. 2 Fengxiangnan Road, Ronggui Town, Shunde District, Foshan City, Guangdong 528303, China Tel: 86-757-28395507 Fax: 86-757-28395571

### China - Qingdao

Rm. B505A, Fullhope Plaza, No. 12 Hong Kong Central Rd. Qingdao 266071, China Tel: 86-532-5027355 Fax: 86-532-5027205 **India** Divyasree Chambers 1 Floor, Wing A (A3/A4) No. 11, O'Shaugnessey Road Bangalore, 560 025, India Tel: 91-80-2290061 Fax: 91-80-2290062 **Japan** Benex S-1 6F 3-18-20, Shinyokohama Kohoku-Ku, Yokohama-shi Kanagawa, 222-0033, Japan Tel: 81-45-471- 6166 Fax: 81-45-471-6122

#### Korea

168-1, Youngbo Bldg. 3 Floor Samsung-Dong, Kangnam-Ku Seoul, Korea 135-882 Tel: 82-2-554-7200 Fax: 82-2-558-5932 or 82-2-558-5934 Singapore 200 Middle Road #07-02 Prime Centre Singapore, 188980 Tel: 65-6334-8870 Fax: 65-6334-8850 Taiwan Kaohsiung Branch 30F - 1 No. 8 Min Chuan 2nd Road Kaohsiung 806, Taiwan Tel: 886-7-536-4818 Fax: 886-7-536-4803 Taiwan Taiwan Branch 11F-3, No. 207 Tung Hua North Road Taipei, 105, Taiwan Tel: 886-2-2717-7175 Fax: 886-2-2545-0139

EUROPE

Austria Durisolstrasse 2 A-4600 Wels Austria Tel: 43-7242-2244-399 Fax: 43-7242-2244-393 Denmark Regus Business Centre Lautrup hoj 1-3

Ballerup DK-2750 Denmark Tel: 45-4420-9895 Fax: 45-4420-9910

### France

Parc d'Activite du Moulin de Massy 43 Rue du Saule Trapu Batiment A - ler Etage 91300 Massy, France Tel: 33-1-69-53-63-20 Fax: 33-1-69-30-90-79

### Germany

Steinheilstrasse 10 D-85737 Ismaning, Germany Tel: 49-89-627-144-0 Fax: 49-89-627-144-44

### Italy

Via Quasimodo, 12 20025 Legnano (MI) Milan, Italy Tel: 39-0331-742611

Fax: 39-0331-466781 Netherlands

P. A. De Biesbosch 14 NL-5152 SC Drunen, Netherlands Tel: 31-416-690399 Fax: 31-416-690340

### United Kingdom

505 Eskdale Road Winnersh Triangle Wokingham Berkshire, England RG41 5TU Tel: 44-118-921-5869 Fax: 44-118-921-5820

01/08/04