

X-Band Magnetron

SF1422B is de

freque ${ t MSF1422B}$ is designed for the magnetron of x-band radar system. The frequency range is fixed <9380-9440MHz> and the peak output power is 6kW.

MAXIMUM RATINGS ---

	Min	Max	Unit
Peak anode current ·····	2.5	6.0	A
Perk anode power input ·····	_	30	kW
Duty cycle ·····	_	0.001	_
Pulse duration ·····	0.05	1.0	μs
Rate of rise of voltage pulse \cdots	-	7 0	kV/μs
Anode temperature · · · · · · ·		100	°C
V.S.W.R at the output coupler ····	X -	1.5:1	_

--- ELECTRICAL ---

	Min	Typical	Max	Unit
Heater voltage (Note 1) · · · · · · ·	5.7	6.3	6.9	V
Preheat time ······	60	-	-	S
Peak anode voltage (Note 2) · · · ·	4.4	4.6	4.8	kV
Peak output power (Note 2) · · · · ·	6.0	6.5	-	kW
Frequency (Note 2) · · · · · · · · · · · · · · · · · ·	9380	9410	9440	MHz


Note 1: Measured with heater voltage of 6.3V and no anode input power, the heater current limits are 0.5A minimum, 0.6A maximum. No reduction of heater voltage is required. 96-3 MMM.Datasheeth.J.com

Note 2: Measured at peak anode current 4.6A



MSF1422B

OUTLINE Note: Dimensions are in mm

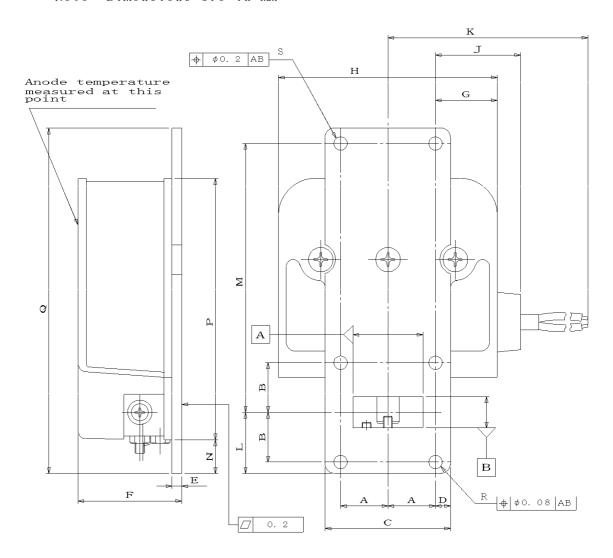

	MIN	MAX	
А	15.	15.5	
В	16.25		
С	40.8	41.2	
D	4.8	5. 2	
E	2. 7	3. 7	
F	_	36. 0	
G	_	21. 5	
Н	_	74. 0	

	MIN	MAX	
J	_	30. 0	
K	240	_	
L	19. 6	20. 2	
M	88		
N	10. 0	_	
Р	_	86. 0	
Q	112. 6	113.2	
R	φ4. 3	φ4. 375	
S	φ4. 4	φ4.5	

Lead Connections

Colour	Element	
Green	Heater	
Yellow	Heater, Cathode	