# Triple Schmitt-Trigger Inverter

The NL37WZ14 is a high performance triple inverter with Schmitt–Trigger inputs operating from a 2.3 to 5.5 V supply.

Pin configuration and function are the same as the NL37WZ04, but the inputs have hysteresis, and with its Schmitt trigger function, the NL37WZ14 can be used as a line receiver which will receive slow input signals. The NL37WZ14 is capable of transforming slowly changing input signals into sharply defined, jitter–free output signals. In addition, it has a greater noise margin than conventional inverters. The NL37WZ14 has hysteresis between the positive–going and the negative–going input thresholds (typically 1.0 V) which is determined internally by transistor ratios and is essentially insensitive to temperature and supply voltage variations.

- Designed for 2.3 V to 5.5 V V<sub>CC</sub> Operation
- Over Voltage Tolerant Inputs and Outputs
- LVTTL Compatible Interface Capability with 5 V TTL Logic with  $V_{CC} = 3 V$
- LVCMOS Compatible
- 24 mA Balanced Output Sink and Source Capability
- Near Zero Static Supply Current Substantially Reduces System Power Requirements
- Current Drive Capability is 24 mA at the Outputs
- Chip Complexity: FET = 94




Figure 1. Pinout (Top View)




Figure 2. Logic Symbol




## ON Semiconductor<sup>™</sup>

http://onsemi.com

MARKING DIAGRAM





D = Date Code

#### PIN ASSIGNMENT

1	IN A1
2	OUT <u>Y3</u>
3	IN A2
4	GND
5	OUT Y2
6	IN A3
7	OUT Y1
8	VCC

#### **FUNCTION TABLE**

Y Output
н
L

#### **ORDERING INFORMATION**

See detailed ordering and shipping information in the package dimensions section on page 5 of this data sheet.

#### MAXIMUM RATINGS

Symbol	Parameter		Value	Unit
VCC	DC Supply Voltage		-0.5 to +7.0	V
VI	DC Input Voltage		-0.5 to +7.0	V
VO	DC Output Voltage		-0.5 to +7.0	V
lik	DC Input Diode Current	V <sub>I</sub> < GND	-50	mA
lok	DC Output Diode Current	V <sub>O</sub> < GND	-50	mA
IO	DC Output Sink Current		±50	mA
ICC	DC Supply Current per Supply Pin		±100	mA
IGND	DC Ground Current per Ground Pin		±100	mA
TSTG	Storage Temperature Range		-65 to +150	°C
ΤL	Lead Temperature, 1 mm from Case for 10 Second	S	260	°C
Tj	Junction Temperature under Bias		+ 150	°C
θJA	Thermal Resistance	(Note 1)	250	°C/W
PD	Power Dissipation in Still Air at 85°C		250	mW
MSL	Moisture Sensitivity		Level 1	
FR	Flammability Rating	Oxygen Index: 28 to 34	UL 94 V–0 @ 0.125 in	
VESD	ESD Withstand Voltage	Human Body Model (Note 2) Machine Model (Note 3) Charged Device Model (Note 4)	> 2000 > 200 N/A	V

Maximum Ratings are those values beyond which damage to the device may occur. Exposure to these conditions or conditions beyond those indicated may adversely affect device reliability. Functional operation under absolute maximum–rated conditions is not implied. Functional operation should be restricted to the Recommended Operating Conditions.

1. Measured with minimum pad spacing on an FR4 board, using 10 mm-by-1 inch, 2-ounce copper trace with no air flow.

2. Tested to EIA/JESD22-A114-A.

3. Tested to EIA/JESD22-A115-A.

4. Tested to JESD22–C101–A.

#### **RECOMMENDED OPERATING CONDITIONS**

Symbol	bol Parameter		Min	Max	Unit
VCC	Supply Voltage	Operating Data Retention Only	2.3 1.5	5.5 5.5	V
VI	Input Voltage	(Note 5)	0	5.5	V
VO	Output Voltage	(HIGH or LOW State)	0	5.5	V
Т <sub>А</sub>	Operating Free–Air Temperature		-40	+ 85	°C
$\Delta t/\Delta V$	Input Transition Rise or Fall Rate	$V_{CC} = 2.5 V \pm 0.2 V V_{CC} = 3.0 V \pm 0.3 V V_{CC} = 5.0 V \pm 0.5 V$	0 0 0	20 10 5	ns/V

5. Unused inputs may not be left open. All inputs must be tied to a high- or low-logic input voltage level.

#### DC CHARACTERISTICS

			Vcc	TA	= 25°C		-40°C ≤ -	Γ <sub>Α</sub> ≤ 85°C	
Symbol	Parameter	Condition	(V)	Min	Тур	Max	Min	Max	Unit
$V_{T}^{+}$	Positive Input Threshold		2.3	1.0	1.5	1.8	1.0	1.8	V
	Voltage		2.7	1.2	1.7	2.0	1.2	2.0	
			3.0	1.3	1.9	2.2	1.3	2.2	
			4.5	1.9	2.7	3.1	1.9	3.1	
			5.5	2.2	3.3	3.6	2.2	3.6	
V <sub>T</sub> -	Negative Input Threshold		2.3	0.4	0.75	1.15	0.4	1.15	V
	Voltage		2.7	0.5	0.87	1.4	0.5	1.4	
			3.0	0.6	1.0	1.5	0.6	1.5	
			4.5	1.0	1.5	2.0	1.0	2.0	
			5.5	1.2	1.9	2.3	1.2	2.3	
VH	Input Hysteresis Voltage		2.3	0.25	0.75	1.1	1.25	1.1	V
			2.7	0.3	0.83	1.15	0.3	1.15	
			3.0	0.4	0.93	1.2	0.4	1.2	
			4.5	0.6	1.2	1.5	0.6	1.5	
			5.5	0.7	1.4	1.7	0.7	1.7	
VOH	High–Level Output	I <sub>OH</sub> = 100 μA	2.3 to 5.5	V <sub>CC</sub> -0.1	VCC		V <sub>CC</sub> - 0.1		V
	Voltage VIN = VIH or VIL	$I_{OH} = -8 \text{ mA}$	2.3	1.9	2.1		1.9		
		$I_{OH} = -12 \text{ mA}$	2.7	2.2	2.4		2.2		
		$I_{OH} = -16 \text{ mA}$	3.0	2.4	2.7		2.4		
		$I_{OH} = -24 \text{ mA}$	3.0	2.3	2.5		2.3		
		$I_{OH} = -32 \text{ mA}$	4.5	3.8	4.0		3.8		
V <sub>OL</sub>	Low–Level Output	I <sub>OL</sub> = 100 μA	2.3 to 5.5			0.1		0.1	V
	Voltage VIN = VIH or VIL	I <sub>OL</sub> = 8 mA	2.3		0.2	0.3		0.3	
		I <sub>OL</sub> = 12 mA	2.7		0.22	0.4		0.4	
		I <sub>OL</sub> = 16 mA	3.0		0.28	0.4		0.4	
		I <sub>OL</sub> = 24 mA	3.0		0.38	0.55		0.55	
		I <sub>OL</sub> = 32 mA	4.5		0.42	0.55		0.55	
I <sub>IN</sub>	Input Leakage Current	$V_{IN}$ or $V_{OUT} = V_{CC}$ or GND	0 to 5.5			±0.1		±1.0	μΑ
IOFF	Power Off–Output Leakage Current	V <sub>OUT</sub> = 5.5 V	0			1		10	μΑ
ICC	Quiescent Supply Current	$V_{IN} = V_{CC}$ or GND	5.5			1		10	μΑ


## AC ELECTRICAL CHARACTERISTICS (Input $t_r = t_f = 3.0 \text{ ns}$ )

			VCC	T <sub>A</sub> = 25°C		С	-40°C ≤ -		
Symbol	Parameter	Condition	(V)	Min	Тур	Max	Min	Мах	Unit
<sup>t</sup> PLH	Propagation Delay	$R_L = 1 M\Omega$ , $C_L = 15 pF$	$2.5\pm0.2$	1.8	4.3	7.4	1.8	8.1	ns
<sup>t</sup> PHL	Input A to Y (Figure 3 and 4)	$R_L = 1 M\Omega$ , $C_L = 15 pF$	3.3 ± 0.3	1.5	3.3	5.0	1.5	5.5	
		$R_L = 500 \Omega$ , $C_L = 50 pF$		1.8	4.0	6.0	1.8	6.6	
		$R_L = 1 M\Omega$ , $C_L = 15 pF$	5.0 ± 0.5	1.0	2.7	4.1	1.0	4.5	
		$R_L = 500 \Omega$ , $C_L = 50 pF$		1.2	3.2	4.9	1.2	5.4	

#### **CAPACITIVE CHARACTERISTICS**

Symbol	Parameter	Condition	Typical	Unit
C <sub>IN</sub>	Input Capacitance	$V_{CC}$ = 5.5 V, $V_{I}$ = 0 V or $V_{CC}$	2.5	pF
C <sub>PD</sub>	Power Dissipation Capacitance	10 MHz, $V_{CC}$ = 3.3 V, $V_{I}$ = 0 V or $V_{CC}$	11	pF
	(Note 6)	10 MHz, $V_{CC}$ = 5.0 V, $V_{I}$ = 0 V or $V_{CC}$	12.5	

6. C<sub>PD</sub> is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation:  $I_{CC(OPR)} = C_{PD} \bullet V_{CC} \bullet f_{in} + I_{CC}$ . C<sub>PD</sub> is used to determine the no-load dynamic power consumption;  $P_D = C_{PD} \bullet V_{CC}^2 \bullet f_{in} + I_{CC} \bullet V_{CC}$ .








Figure 4. Test Circuit



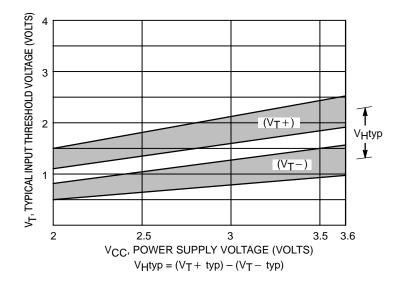


Figure 5. Typical Input Threshold, VT+, VT- versus Power Supply Voltage



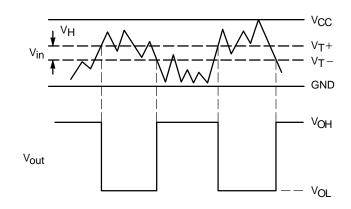

(a) A Schmitt–Trigger Squares Up Inputs With Slow Rise and Fall Times

(b) A Schmitt-Trigger Offers Maximum Noise Immunity

## Figure 6. Typical Schmitt–Trigger Applications

#### **DEVICE ORDERING INFORMATION**

			Device No	menclature				
Device Order Number	Logic Circuit Indicator	No. of Gates per Package	Temp Range Identifier	Technology	Device Function	Package Suffix	Package Type	Tape and Reel Size
NL37WZ14US	NL	3	7	WZ	14	US	US8	178 mm, 3000 Unit

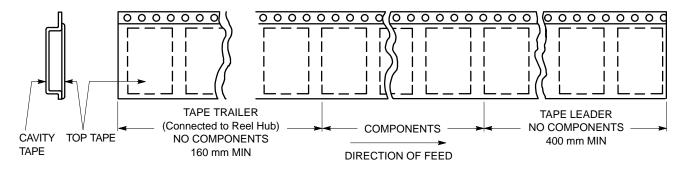


Figure 7. Tape Ends for Finished Goods


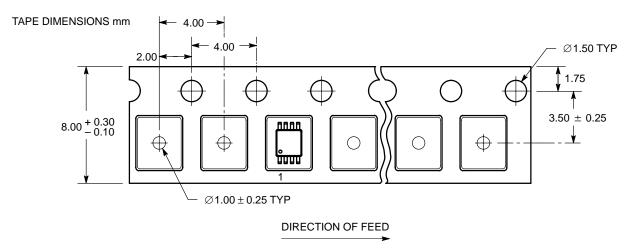



Figure 8. US8 Reel Configuration/Orientation




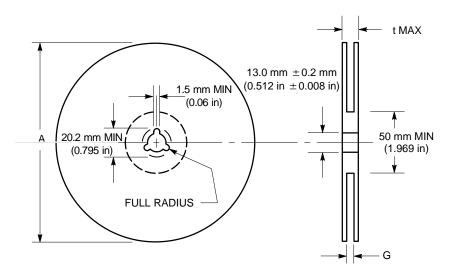

#### **REEL DIMENSIONS**


Tape Size	T and R Suffix	A Max	G	t Max
8 mm	US	178 mm (7 in)	8.4 mm, + 1.5 mm, –0.0 (0.33 in + 0.059 in, –0.00)	14.4 mm (0.56 in)

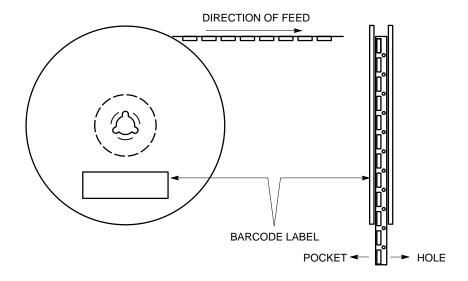



#### PACKAGE DIMENSIONS


US8 US SUFFIX CASE 493–01 ISSUE O

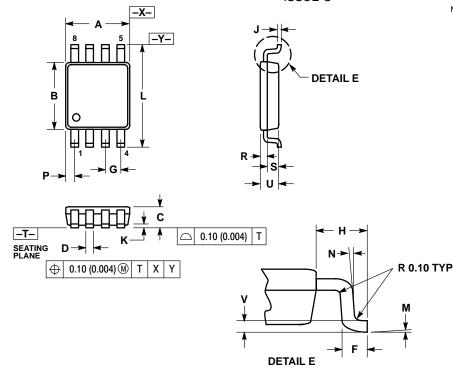

NOTES:

- 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
   2. CONTROLLING DIMENSION: MILLIMETERS
- CONTROLLING DIMENSION: MILLIMETERS
  DIMENSION 'A' DOES NOT INCLUDE MOLD FLASH, PROTRUSION OR GATE BURR. MOLD FLASH, PROTRUSION AND GATE BURR SHALL
- FLASH, PROTRUSION AND GATE BURR SHALL NOT EXCEED 0.140 MM (0.0055") PER SIDE.
   DIMENSION "B" DOES NOT INCLUDE
- INTER-LEAD FLASH OR PROTRUSION.
  INTER-LEAD FLASH AND PROTRUSION SHALL NOT E3XCEED 0.140 (0.0055") PER SIDE.
   LEAD FINISH IS SOLDER PLATING WITH
- THICKNESS OF 0.0076-0. 0203 MM. (300-800 INCH). 6. ALL TOLERANCE UNLESS OTHERWISE
- ALL TOLERANCE UNLESS OTHERWISE SPECIFIED ±0.0508 (0.0002").

	MILLIN	IETERS	INC	HES
DIM	MIN	MAX	MIN	MAX
Α	1.90	2.10	0.075	0.083
В	2.20	2.40	0.087	0.094
С	0.60	0.90	0.024	0.035
D	0.17	0.25	0.007	0.010
F	0.20	0.35	0.008	0.014
G	0.50	BSC	0.020	) BSC
Н	0.40	REF	0.016 REF	
J	0.10	0.18	0.004	0.007
К	0.00	0.10	0.000	0.004
L	3.00	3.20	0.118	0.126
М	0 °	6 °	0 °	6 °
Ν	5 °	10 °	5 °	10 °
Ρ	0.28	0.44	0.011	0.017
R	0.23	0.33	0.009	0.013
S	0.37	0.47	0.015	0.019
U	0.60	0.80	0.024	0.031
V	0.12	BSC	0.005	5 BSC



**ON Semiconductor** and without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer.

#### PUBLICATION ORDERING INFORMATION

#### Literature Fulfillment:

Literature Distribution Center for ON Semiconductor

P.O. Box 5163, Denver, Colorado 80217 USA

Phone: 303–675–2175 or 800–344–3860 Toll Free USA/Canada Fax: 303–675–2176 or 800–344–3867 Toll Free USA/Canada Email: ONlit@hibbertco.com

N. American Technical Support: 800-282-9855 Toll Free USA/Canada

JAPAN: ON Semiconductor, Japan Customer Focus Center 4–32–1 Nishi–Gotanda, Shinagawa–ku, Tokyo, Japan 141–0031 Phone: 81–3–5740–2700 Email: r14525@onsemi.com

ON Semiconductor Website: http://onsemi.com

For additional information, please contact your local Sales Representative.