

#### **General Description**

The MAX4789-MAX4794 family of switches feature internal current limiting to prevent damage to host devices due to faulty load conditions. These analog switches have a low  $0.2\Omega$  on-resistance and operate from 2.3V to 5.5V input voltage range. They are available with guaranteed 200mA, 250mA, and 300mA current limits, making them ideal for SDIO and other load switching applications.

When the switch is on and a load is connected to the port, a guaranteed blanking time of 14ms ensures that the transient voltages settle down. If after this blanking time the load current is greater than the current limit, the MAX4789, MAX4791, and MAX4793 enter a latchoff state where the switch is turned off and FLAG is issued to the microprocessor. The switch can be turned on again by cycling the power or the ON pin.

The MAX4790, MAX4792, and MAX4794 have an autoretry feature where the switch turns off after the blanking time and then continuously checks to see if the overload condition is present. The switch remains on after the overload condition disappears.


The MAX4789-MAX4794 are available in 6-pin 3mm x 3mm TDFN and tiny space-saving 4-pin SOT143 packages. The MAX4789/MAX4791/MAX4793 are also available in a tiny 5-pin SOT23 package. For lower current current-limiting switches, refer to the MAX4785-MAX4788 data sheet.

## **Applications**

PDAs and Palmtop Devices Cell Phones **GPS Systems** Hand-Held Devices

SDIO

## Pin Configurations



#### **Features**

- ♦ Guaranteed Current Limit: 200mA, 250mA, 300mA
- **♦ Thermal-Shutdown Protection**
- ♦ Reverse Current Protection
- ♦ 0.2Ω On-Resistance
- ♦ 14ms Guaranteed Blanking Time
- ♦ FLAG Function (MAX4789/MAX4791/MAX4793)
- ♦ 80µA Supply Current
- ♦ 8µA Latch-Off Current (MAX4789/MAX4791/MAX4793)
- ♦ 0.01µA Shutdown Current
- ♦ 2.3V to 5.5V Supply Range
- **♦ Undervoltage Lockout**
- ♦ Fast Current-Limit Response Time (5µs)
- ♦ TDFN and SOT23/SOT143 Packages


## **Ordering Information**

PART	TEMP RANGE	PIN-PACKAGE	TOP MARK
MAX4789EUS-T	-40°C to +85°C	4 SOT143-4	KAFE
MAX4789EUK-T	-40°C to +85°C	5 SOT23-5	AEAC
MAX4789ETT	-40°C to +85°C	6 TDFN-EP*	ABO
MAX4790EUS-T	-40°C to +85°C	4 SOT143-4	KAFF
MAX4790ETT	-40°C to +85°C	6 TDFN-EP	ABP

<sup>\*</sup>EP = Exposed pad.

Ordering Information continued at end of data sheet. Selector Guide appears at end of data sheet.

## Typical Operating Circuit



Maxim Integrated Products 1

#### **ABSOLUTE MAXIMUM RATINGS**

IN, ON, FLAG, OUT to GND0.3V to +6V	Operating Temperature Range40°C to +85°C
OUT Short Circuit to GNDInternally Limited	Junction Temperature+150°C
Continuous Power Dissipation (T <sub>A</sub> = +70°C)	Storage Temperature Range65°C to +150°C
4-Pin SOT143 (derate 4.0mW/°C above +70°C)320mW	Lead Temperature (soldering, 10s)+300°C
5-Pin SOT23 (derate 7.1mW/°C above +70°C)571mW	
6-Pin TDFN (derate 24.4mW/°C above +70°C)1951.2mW	

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

#### **ELECTRICAL CHARACTERISTICS**

 $(V_{IN} = 2.3V \text{ to } 5.5V, T_A = -40^{\circ}\text{C} \text{ to } +85^{\circ}\text{C}, \text{ unless otherwise noted.}$  Typical values are at  $V_{IN} = 3.3V, T_A = +25^{\circ}\text{C}.)$  (Note 1)

PARAMETER	SYMBOL	COND	ITIONS	MIN	TYP	MAX	UNITS	
Operating Voltage	V <sub>IN</sub>			2.3		5.5	V	
Quiescent Current	1-	$V_{ON} = V_{IN}, I_{OUT} = 0,$	$V_{IN} = +2.3V \text{ to } +5.0V$		80	120		
Quiescent Current	lQ	switch on	$V_{IN} = +5.0V \text{ to } +5.5V$			160	μΑ	
Latch-Off Current (Note 2)	ILATCH	V <sub>ON</sub> = V <sub>IN</sub> , after an ov (MAX4789/MAX4791/			8	15	μΑ	
Shutdown Current	ISHDN	$V_{ON} = 0V$			0.01	1	μΑ	
		MAX4789/MAX4790		200		300		
Forward Current Limit		MAX4791/MAX4792		250		375	mA	
		MAX4793/MAX4794		300		450	]	
		MAX4789/MAX4790				300		
Reverse Current Limit		MAX4791/MAX4792	MAX4791/MAX4792			375	mA	
		MAX4793/MAX4794				450		
ON Input Leakage		V <sub>ON</sub> = V <sub>IN</sub> or GND		-1		+1	μΑ	
Off Switch Leakage		$V_{ON} = 0V$ , $V_{OUT} = 0V$	,		0.01	1	μΑ	
Undervoltage Lockout	UVLO	Rising edge		1.8		2.2	V	
Undervoltage Lockout Hysteresis					100		mV	
On-Resistance	Ron	$T_A = +25^{\circ}C$ , $I_{OUT} = 1$	00mA		0.2	0.4		
OII-nesistarice	HON	$T_A = -40$ °C to +85°C, $I_{OUT} = 100$ mA				0.5	Ω	
ON Input Logic High Voltage	VIH			2.0			V	
ON Input Logic Low Voltage	V <sub>IL</sub>					0.8	V	
FLAG Output Logic Low Voltage		I <sub>SINK</sub> = 1mA (MAX478	9/MAX4791/MAX4793)			0.4	V	
FLAG Output High Leakage Current		V <sub>IN</sub> = V <del>FLAG</del> = 5.5V (MAX4789/MAX4791/	MAX4793)			1	μΑ	
Thermal Shutdown					150		°C	
Thermal-Shutdown Hysteresis					15		°C	
DYNAMIC								
Turn-On Time (Note 3)		$V_{ON}$ from low to high; $C_L = 0.1 \mu F$	I <sub>OUT</sub> = 10mA,		100		μs	
Turn-Off Time (Note 3)		$V_{ON}$ from high to low; $C_L = 0.1 \mu F$	I <sub>OUT</sub> = 10mA,		40		ns	

## www.da ELECTRICAL CHARACTERISTICS (continued)

 $(V_{IN} = 2.3V \text{ to } 5.5V, T_A = -40^{\circ}\text{C} \text{ to } +85^{\circ}\text{C}, \text{ unless otherwise noted.}$  Typical values are at  $V_{IN} = 3.3V, T_A = +25^{\circ}\text{C}.)$  (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Blanking Time	t <sub>BLANK</sub>	Overcurrent fault (Figures 2, 3)	14		60	ms
Short-Circuit Current-Limit Response Time		$V_{ON} = V_{IN} = 3.3V$ , short circuit applied to OUT		5		μs
Retry Time (Note 4)	<sup>†</sup> RETRY	MAX4790/MAX4792/MAX4794 (Figure 2)	98		420	ms

Note 1: All parts are 100% tested at +25°C. Limits across the full temperature range are guaranteed by design and correlation.


Note 2: Latch-off current does not include the current flowing into FLAG.

Note 3: The on time is defined as the time taken for the current through the switch to go from 0mA to full load. The off-time is defined as the time taken for the current through the switch to go from full load to 0mA.

Note 4: Retry time is typically 7 times the blanking time.


## Typical Operating Characteristics

 $(V_{IN} = 3.3V, T_A = +25$ °C, unless otherwise noted.)

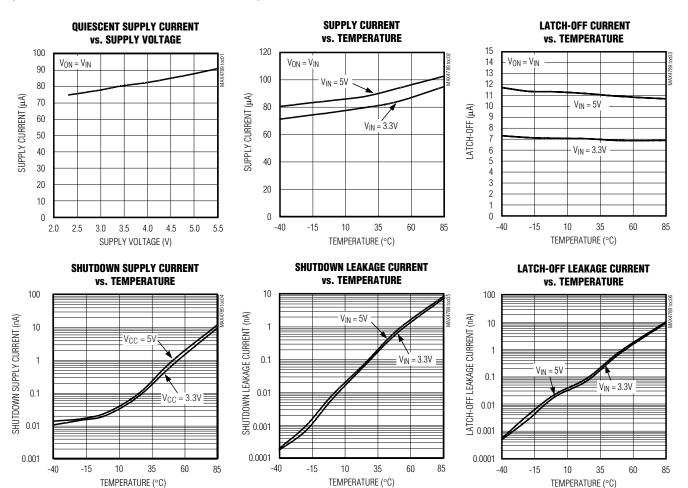


## \_Typical Operating Characteristics (continued)


 $(V_{IN} = 3.3V, T_A = +25^{\circ}C, unless otherwise noted.)$ 




# SWITCH TURN-ON/OFF TIMES vs. TEMPERATURE




#### **CURRENT-LIMIT RESPONSE**






# FLAG-BLANKING TIMEOUT vs. TEMPERATURE




#### **CURRENT-LIMIT RESPONSE**




\_\_\_\_\_Typical Operating Characteristics (continued)

( $V_{IN} = 3.3V$ ,  $T_A = +25$ °C, unless otherwise noted.)


#### CURRENT-LIMIT RESPONSE (OUT SHORTED TO GND)




#### **SWITCH TURN-ON TIME RESPONSE**



#### **SWITCH TURN-OFF TIME RESPONSE**



#### **FLAG-BLANKING RESPONSE**



## **Pin Description**

	P	IN			
TDFN MAX4789 MAX4791 MAX4793	TDFN MAX4790 MAX4792 MAX4794	<b>5-SOT23</b> MAX4789 MAX4791 MAX4793	<b>4-SOT143</b> MAX4789– MAX4794	NAME	FUNCTION
1		4		FLAG	Fault Output. This open-drain output goes low when the device stays in forward or reverse current limit for more than the blanking time period. FLAG is high impedance when a fault is not present or when ON is low.
2	2	2	2	GND	Ground
3	3	3	3	ON	Active-High Switch On Input. A logic high turns the switch on.
4	1, 4	ĺ	1	N.C.	No Connection. Not internally connected.
5	5	1	4	IN	Input. Bypass with a 0.1µF ceramic capacitor to ground.
6	6	5	1	OUT	Switch Output. Bypass with a 0.1µF ceramic capacitor to ground.

# MAX4789-MAX4794

# 200mA/250mA/300mA Current-Limit Switches

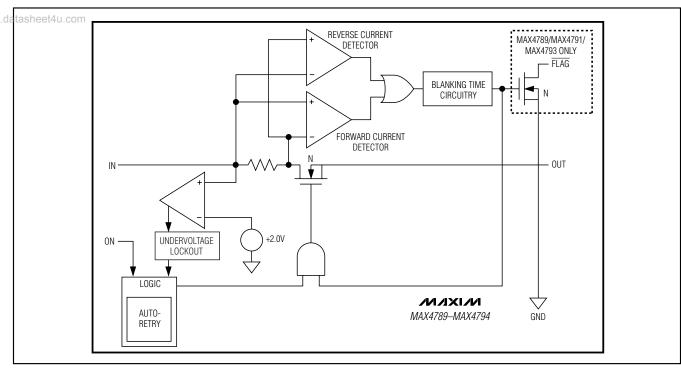


Figure 1. Functional Diagram

## **Detailed Description**

The MAX4789–MAX4794 are forward/reverse current-limited switches that operate from a 2.3V to 5.5V input voltage range and guarantee a 200mA, 250mA, and 300mA minimum current-limit threshold for different options. The voltage drop across an internal sense resistor is compared to two reference voltages to indicate a forward or reverse current-limit fault. When the load current exceeds the preset current limit for greater than the fault-blanking time, the switch opens.

The MAX4790, MAX4792, and MAX4794 have an autoretry function that turns on the switch again after an internal retry time expires. If the faulty load condition is still present after the blanking time, the switch turns off again and the cycle is repeated. If the faulty load condition is not present, the switch remains on.

The MAX4789, MAX4791, and MAX4793 do not have the autoretry option and the switch remains in latch-off mode until the ON pin or the input power is cycled from high to low and then high again.

The undervoltage lockout (UVLO) circuit prevents erroneous switch operation when the input voltage goes too low during startup conditions.

#### **Reverse Current Protection**

The MAX4789–MAX4794 limit the reverse current (V<sub>OUT</sub> to V<sub>IN</sub>) from exceeding the maximum I<sub>REV</sub> value. The switch is shut off and FLAG is asserted (MAX4789/MAX4791/MAX4793) if the reverse current-limit condition persists for more than the blanking time. This feature prevents excessive reverse currents from flowing through the device.

#### **Switch-On/Off Control**

Toggle ON high to enable the current-limited switches. The switches are continuously on, only if  $V_{IN}$  exceeds the UVLO threshold (typically 2V) and there is no fault. When a forward/reverse current fault is present or the die exceeds the thermal-shutdown temperature of +150°C, OUT is internally disconnected from IN and the supply current decreases to 8 $\mu A$  (latch off). The switch is now operating in one of its off states. The switch-off state also occurs when driving ON low, thus reducing the supply current (shutdown) to 0.01 $\mu A$ . Table 1 illustrates the ON/OFF state of the MAX4789–MAX4794 current-limit switches.

#### **FLAG Indicator**

The MAX4789, MAX4791, and MAX4793 feature a latched fault output, FLAG. Whenever a fault is activated, it latches FLAG output low and also turns the switch

#### www.daTable\_1oMAX4789-MAX4794 Switch Truth Table

ON	FAULT	SWITCH ON/OFF	SUPPLY CURRENT MODE
Low	X	OFF	Shutdown
High	Undervoltage Lockout	OFF	Shutdown
High	Thermal	OFF immediately (tBLANK period does not apply)	Latch off
		OFF after t <sub>BLANK</sub> period has elapsed	Latch off
High	Current Limit	ON during t <sub>BLANK</sub> period, OFF during t <sub>RETRY</sub> period for the MAX4790, MAX4792, and MAX4794; cycle repeats until fault is removed	See the Autoretry section

off. FLAG is an open-drain output transistor and requires an external pullup resistor from FLAG to IN. During shutdown (ON is low), the pulldown on FLAG output is released in order to limit power dissipation. FLAG goes low when any of the following conditions occur:

- The die temperature exceeds the thermal-shutdown temperature limit of +150°C.
- The device is in current limit for more than the fault-blanking period.
- V<sub>IN</sub> is below UVLO threshold.

#### Autoretry (MAX4790/MAX4792/MAX4794)

When the forward or reverse current-limit threshold is exceeded, tblank timer begins counting (Figure 2). The timer resets if the overcurrent condition disappears before tblank has elapsed. A retry time delay, tretry, is started immediately after tblank has elapsed and during that time, the switch is latched off. At the end of tretry, the switch is turned on again. If the fault still exists, the cycle is repeated. If the fault has been removed, the switch stays on.

The autoretry feature saves system power in the case of an overcurrent or short-circuit condition. During  $t_{BLANK}$ , when the switch is on, the supply current is at the current limit. During  $t_{RETRY}$ , when the switch is off, the current through the switch is zero. Instead of observing the full load current, the switch sees the equivalent load current times duty cycle or  $t_{SUPPLY} = t_{LOAD} \times t_{BLANK}/(t_{BLANK} + t_{RETRY})$ . With a typical  $t_{BLANK} = 37 \text{ms}$  and typical  $t_{RETRY} = 259 \text{ms}$ , the duty cycle is 12%, which results in an 88% power savings over the switch being on the entire time. The duty cycle is consistent across the process and devices.

#### Latch Off (MAX4789/MAX4791/MAX4793)

When the forward or reverse current-limit threshold is exceeded, tblank timer begins counting. The timer resets if the overcurrent condition disappears before tblank has elapsed. The switch is shut off if the overcurrent condition continues up to the end of the blank-




Figure 2. MAX4790/MAX4792/MAX4794 Autoretry Fault Blanking Diagram

ing time. Reset the switch by either toggling ON (Figure 3a) or cycling the input voltage below UVLO, typically 2V (Figure 3b).

## \_Fault Blanking

The MAX4789–MAX4794 feature 14ms (min) fault blanking. Fault blanking allows current-limit faults, including momentary short-circuit faults that occur when hot swapping a capacitive load, and also ensures that no fault is issued during power-up. When a load transient causes the device to enter current limit, an internal counter starts. If the load-transient fault persists beyond the fault-blanking timeout, the MAX4789/MAX4791/MAX4793 FLAG asserts low. Load-transient faults less than tBLANK do not cause a FLAG output assertion. Only current-limit faults are blanked.

A thermal fault and input voltage drops below the UVLO threshold cause FLAG to assert immediately and do not wait for the blanking time.

#### Thermal Shutdown

The MAX4789–MAX4794 have a thermal shutdown feature to protect the devices from overheating. The switch turns off and  $\overline{FLAG}$  goes low immediately (no fault blanking) when the junction temperature exceeds +150°C. The switch turns back on when the device temperature drops approximately 15°C.

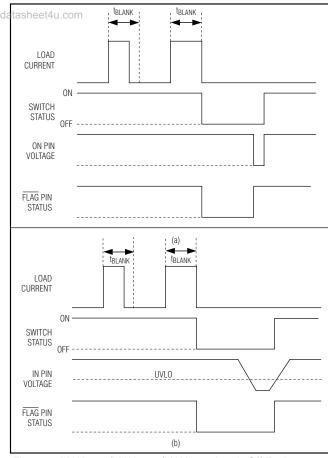


Figure 3. MAX4789/MAX4791/MAX4793 Latch-Off Fault Blanking

## **Applications Information**

#### **Input Capacitor**

To limit the input voltage drop during momentary output short-circuit conditions, connect a capacitor from IN to GND. A 0.1µF ceramic capacitor is adequate for most applications; however, higher capacitor values further reduce the voltage drop at the input and are recommended for lower voltage applications.

#### **Output Capacitance**

Connect a 0.1µF capacitor from OUT to GND. This capacitor helps prevent inductive parasitics from pulling OUT negative during turn-off, thus preventing

the MAX4789–MAX4794 from tripping erroneously. If the load capacitance is too large, then current may not have enough time to charge the capacitance and the device assumes that there is a faulty load condition. The maximum capacitive load value that can be driven from OUT is obtained by the following formula:

$$C_{MAX} < \frac{I_{FWD\_MIN} \times t_{BLANK\_MIN}}{V_{IN}}$$

#### **Layout and Thermal Dissipation**

To optimize the switch response time to output short-circuit conditions, it is very important to keep all traces as short as possible to reduce the effect of undesirable parasitic inductance. Place input and output capacitors as close as possible to the device (no more than 5mm). IN and OUT pins must be connected with short traces to the power bus.

During normal operation, the power dissipation is small and the package temperature change is minimal. If the output is continuously shorted to ground at the maximum supply voltage, the operation of the switches with the autoretry option does not cause problems because the total power dissipated during the short is scaled by the duty cycle:

$$P_{MAX} = \frac{V_{IN\_MAX} \times I_{OUT\_MAX} \times t_{BLANK}}{t_{BFTRY} + t_{BLANK}} = 302 \text{mW}$$

where  $V_{IN}$  = 5.5V,  $I_{OUT}$  = 450mA,  $t_{BLANK}$  = 14ms, and  $t_{RETRY}$  = 98ms.


Attention must be given to the MAX4789, MAX4791, and MAX4793 where the latch-off condition must be manually reset by toggling ON from high to low. If the latch-off time duration is not sufficiently high, it is possible for the device to reach the thermal-shutdown threshold and never be able to turn the device on until it cools down.

#### **Chip Information**

TRANSISTOR COUNT: 1408

PROCESS: BiCMOS

# www.datasheet Pin Configurations (continued)



## \_\_Ordering Information (continued)

PART	TEMP RANGE	PIN-PACKAGE	TOP MARK
MAX4791EUS-T	-40°C to +85°C	4 SOT143-4	KAFG
MAX4791EUK-T	-40°C to +85°C	5 SOT23-5	AEAE
MAX4791ETT	-40°C to +85°C	6 TDFN-EP*	ABQ
MAX4792EUS-T	-40°C to +85°C	4 SOT143-4	KAFH
MAX4792ETT	-40°C to +85°C	6 TDFN-EP*	ABR
MAX4793EUS-T	-40°C to +85°C	4 SOT143-4	KAFI
MAX4793EUK-T	-40°C to +85°C	5 SOT23-5	AEAG
MAX4793ETT	-40°C to +85°C	6 TDFN-EP*	ABS
MAX4794EUS-T	-40°C to +85°C	4 SOT143-4	KAFJ
MAX4794ETT	-40°C to +85°C	6 TDFN-EP*	ABT

<sup>\*</sup>EP = Exposed pad.


## **Selector Guide**

PART	PIN- PACKAGE	CURRENT LIMIT (mA)	FLAG FUNCTION	AUTO- RETRY
MAX4789EUS	4 SOT143	200	No	No
MAX4789EUK	5 SOT23	200	Yes	No
MAX4789ETT	6 TDFN	200	Yes	No
MAX4790EUS	4 SOT143	200	No	Yes
MAX4790ETT	6 TDFN	200	No	Yes
MAX4791EUS	4 SOT143	250	No	No
MAX4791EUK	5 SOT23	250	Yes	No
MAX4791ETT	6 TDFN	250	Yes	No
MAX4792EUS	4 SOT143	250	No	Yes
MAX4792ETT	6 TDFN	250	No	Yes
MAX4793EUS	4 SOT143	300	No	No
MAX4793EUK	5 SOT23	300	Yes	No
MAX4793ETT	6 TDFN	300	Yes	No
MAX4794EUS	4 SOT143	300	No	Yes
MAX4794ETT	6 TDFN	300	No	Yes

www.datasheet4u.com

#### Package Information


(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to **www.maxim-ic.com/packages**.)

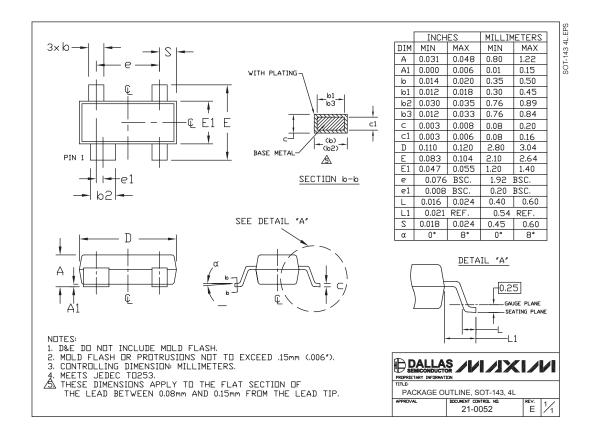

www.datasheet4u.com

## Package Information (continued)


(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to **www.maxim-ic.com/packages**.)

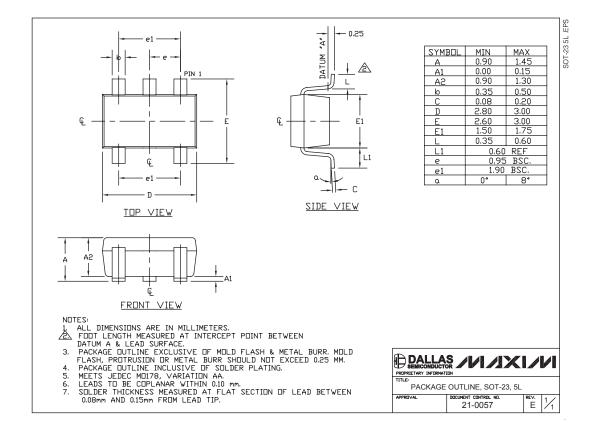

#### w.datasheet4u.com

## Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to **www.maxim-ic.com/packages**.)

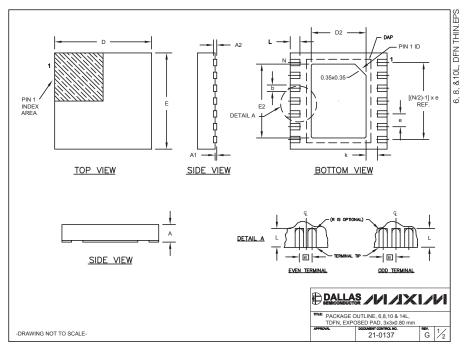

1 00	ON DIME	NSIONS								
SYMBOL	MIN.	MAX.	]							
A	0.70	0.80								
D	2.90	3.10								
E	2.90	3.10								
A1	0.00	0.05								
k k		0.40 25 MIN	ļ							
A2		20 RFF.	1							
			=							
PACKAGE VAR	RIATIONS	;							]	
PKG. CODE	N	D2	E2	е	JEDEC SPEC	b	[(N/2)-1] x e	DOWNBONDS ALLOWED	1	
T633-1	6	1.50±0.10	2.30±0.10	0.95 BSC	MO229 / WEEA	0.40±0.05	1.90 REF	NO		
T633-2	6	1.50±0.10	2.30±0.10	0.95 BSC	MO229 / WEEA	0.40±0.05	1.90 REF	NO	]	
T833-1	8	1.50±0.10	2.30±0.10	0.65 BSC	MO229 / WEEC	0.30±0.05	1.95 REF	NO		
T833-2	8	1.50±0.10	2.30±0.10	0.65 BSC	MO229 / WEEC	0.30±0.05	1.95 REF	NO	_	
T833-3	8	1.50±0.10	2.30±0.10	0.65 BSC	MO229 / WEEC	0.30±0.05	1.95 REF	YES	_	
T1033-1	10	1.50±0.10	2.30±0.10	0.50 BSC	MO229 / WEED-3	0.25±0.05	2.00 REF	NO	_	
T1433-1	14	1.70±0.10	2.30±0.10	0.40 BSC		0.20±0.05	2.40 REF	YES	_	
T1433-2	14	1.70±0.10	2.30±0.10	0.40 BSC		0.20±0.05	2.40 REF	NO	_	
NOTES:  1. ALL DIMENS 2. COPLANARI 3. WARPAGE S 4. PACKAGE L	Y SHALL HALL NO ENGTH/F HARACTE	NOT EXCI OT EXCEED PACKAGE W RISTIC(S).	ED 0.08 n 0.10 mm. DTH ARE C	onsidered	AS IENSIONS "D2" ANI	o "E2".	Φ.		/ <b>/</b> ///X	

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

\_Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600