74LVC08A-Q100

Quad 2-input AND gate Rev. 1 — 31 July 2012

Product data sheet

1. **General description**

The 74LVC08A-Q100 provides four 2-input AND gates.

Inputs can be driven from either 3.3 V or 5 V devices. This feature allows the use of these devices as translators in mixed 3.3 V and 5 V applications.

This product has been qualified to the Automotive Electronics Council (AEC) standard Q100 (Grade 1) and is suitable for use in automotive applications.

2. Features and benefits

- Automotive product qualification in accordance with AEC-Q100 (Grade 1)
 - ◆ Specified from -40 °C to +85 °C and from -40 °C to +125 °C
- 5 V tolerant inputs for interfacing with 5 V logic
- Wide supply voltage range from 1.2 V to 3.6 V
- CMOS low power consumption
- Direct interface with TTL levels
- Complies with JEDEC standard:
 - ◆ JESD8-7A (1.65 V to 1.95 V)
 - ◆ JESD8-5A (2.3 V to 2.7 V)
 - ◆ JESD8-C/JESD36 (2.7 V to 3.6 V)
- ESD protection:
 - ◆ MIL-STD-883, method 3015 exceeds 2000 V
 - ◆ HBM JESD22-A114F exceeds 2000 V
 - ♦ MM JESD22-A115-A exceeds 200 V (C = 200 pF, R = 0 Ω)
- Multiple package options




3. Ordering information

Table 1. Ordering information


| Type number | Package | | | | | | | | | | |
|-----------------|-------------------|----------|--|----------|--|--|--|--|--|--|--|
| | Temperature range | Name | Description | Version | | | | | | | |
| 74LVC08AD-Q100 | –40 °C to +125 °C | SO14 | plastic small outline package; 14 leads; body width 3.9 mm | SOT108-1 | | | | | | | |
| 74LVC08APW-Q100 | –40 °C to +125 °C | TSSOP14 | plastic thin shrink small outline package; 14 leads; body width 4.4 mm | SOT402-1 | | | | | | | |
| 74LVC08ABQ-Q100 | –40 °C to +125 °C | DHVQFN14 | plastic dual in-line compatible thermal enhanced very thin quad flat package; no leads; 14 terminals; body 2.5 \times 3 \times 0.85 mm | SOT762-1 | | | | | | | |

4. Functional diagram

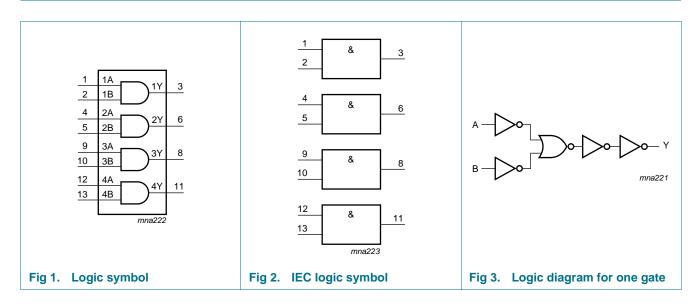

5. Pinning information

5.1 Pinning

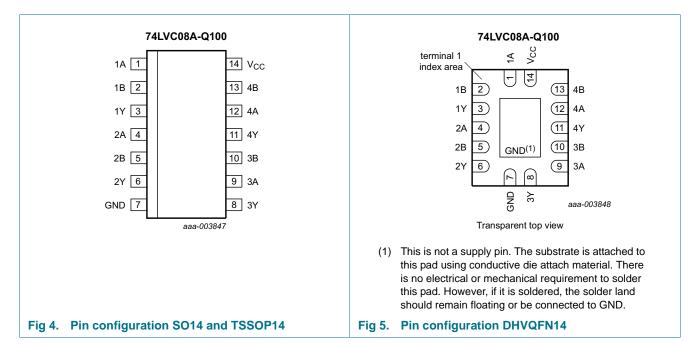

5.2 Pin description

Table 2. Pin description

| Symbol | Pin | Description |
|-----------------|--------------|----------------|
| 1A to 4A | 1, 4, 9, 12 | data output |
| 1B to 4B | 2, 5, 10, 13 | data input |
| 1Y to 4Y | 3, 6, 8,11 | data input |
| GND | 7 | ground (0 V) |
| V _{CC} | 14 | supply voltage |

6. Functional description

Table 3. Function selection[1]

| Input | | Output |
|-------|----|--------|
| nA | nB | nY |
| L | X | L |
| X | L | L |
| Н | Н | Н |

[1] H = HIGH voltage level; L = LOW voltage level; X = don't care

7. Limiting values

Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

| Symbol | Parameter | Conditions | Min | Max | Unit |
|------------------|-------------------------|--|-----------------|----------------|------|
| V_{CC} | supply voltage | | -0.5 | +6.5 | V |
| I _{IK} | input clamping current | V _I < 0 V | -50 | - | mA |
| VI | input voltage | | <u>[1]</u> –0.5 | +6.5 | V |
| I _{OK} | output clamping current | $V_O > V_{CC}$ or $V_O < 0 V$ | - | ±50 | mA |
| Vo | output voltage | output HIGH or LOW-state | <u>[2]</u> –0.5 | $V_{CC} + 0.5$ | V |
| I _O | output current | $V_O = 0 V \text{ to } V_{CC}$ | - | ±50 | mA |
| I _{CC} | supply current | | - | 100 | mA |
| I_{GND} | ground current | | -100 | - | mA |
| P _{tot} | total power dissipation | $T_{amb} = -40 ^{\circ}\text{C} \text{ to } +125 ^{\circ}\text{C}$ | <u>[3]</u> _ | 500 | mW |
| T _{stg} | storage temperature | | -65 | +150 | °C |

^[1] The minimum input voltage ratings may be exceeded if the input current ratings are observed.

8. Recommended operating conditions

Table 5. Recommended operating conditions

| Symbol | Parameter | Conditions | Min | Тур | Max | Unit |
|---------------------|-------------------------------------|--|------|-----|----------|------|
| V_{CC} | supply voltage | | 1.65 | - | 3.6 | V |
| | | functional | 1.2 | - | - | V |
| V_{I} | input voltage | | 0 | - | 5.5 | V |
| Vo | output voltage | output HIGH or LOW-state | 0 | - | V_{CC} | V |
| T _{amb} | ambient temperature | | -40 | - | +125 | °C |
| $\Delta t/\Delta V$ | input transition rise and fall rate | V _{CC} = 1.65 V to 2.7 V | 0 | - | 20 | ns/V |
| | | $V_{CC} = 2.7 \text{ V to } 3.6 \text{ V}$ | 0 | - | 10 | ns/V |

^[2] The output voltage ratings may be exceeded if the output current ratings are observed.

^[3] For SO14 packages: above 70 °C derate linearly with 8 mW/K.
For TSSOP14 packages: above 60 °C derate linearly with 5.5 mW/K.
For DHVQFN14 packages: above 60 °C derate linearly with 4.5 mW/K.

9. Static characteristics

Table 6. Static characteristics

At recommended operating conditions. Voltages are referenced to GND (ground = 0 V).

| Symbol | Parameter | Conditions | -40 | °C to +8 | 35 °C | -40 °C to | o +125 °C | Unit |
|------------------|---------------------------------|--|-----------------------|----------|----------------------|-----------------------|----------------------|------|
| | | | Min | Typ[1] | Max | Min | Max | |
| V _{IH} | HIGH-level | V _{CC} = 1.2 V | 1.08 | - | - | 1.08 | - | V |
| | input voltage | V _{CC} = 1.65 V to 1.95 V | $0.65 \times V_{CC}$ | - | - | $0.65 \times V_{CC}$ | - | V |
| | | V _{CC} = 2.3 V to 2.7 V | 1.7 | - | - | 1.7 | - | V |
| | | V _{CC} = 2.7 V to 3.6 V | 2.0 | - | - | 2.0 | - | V |
| V _{IL} | LOW-level | V _{CC} = 1.2 V | - | - | 0.12 | - | 0.12 | V |
| | input voltage | V _{CC} = 1.65 V to 1.95 V | - | - | $0.35 \times V_{CC}$ | - | $0.35 \times V_{CC}$ | V |
| | | V _{CC} = 2.3 V to 2.7 V | - | - | 0.7 | - | 0.7 | V |
| | | V _{CC} = 2.7 V to 3.6 V | - | - | 0.8 | - | 0.8 | V |
| V _{OH} | HIGH-level | $V_I = V_{IH}$ or V_{IL} | | | | | | |
| | output voltage | $I_O = -100 \mu A;$ $V_{CC} = 1.65 \text{ V to } 3.6 \text{ V}$ | V _{CC} - 0.2 | - | - | V _{CC} - 0.3 | - | V |
| | | $I_{O} = -4 \text{ mA}; V_{CC} = 1.65 \text{ V}$ | 1.2 | - | - | 1.05 | - | V |
| | | $I_{O} = -8 \text{ mA}; V_{CC} = 2.3 \text{ V}$ | 1.8 | - | - | 1.65 | - | V |
| | | $I_{O} = -12 \text{ mA}; V_{CC} = 2.7 \text{ V}$ | 2.2 | - | - | 2.05 | - | V |
| | | $I_{O} = -18 \text{ mA}; V_{CC} = 3.0 \text{ V}$ | 2.4 | - | - | 2.25 | - | V |
| | | $I_{O} = -24 \text{ mA}; V_{CC} = 3.0 \text{ V}$ | 2.2 | - | - | 2.0 | - | V |
| V _{OL} | LOW-level | $V_I = V_{IH}$ or V_{IL} | | | | | | |
| | output voltage | $I_O = 100 \mu A;$ $V_{CC} = 1.65 \text{ V to } 3.6 \text{ V}$ | - | - | 0.2 | - | 0.3 | V |
| | | $I_O = 4 \text{ mA}$; $V_{CC} = 1.65 \text{ V}$ | - | - | 0.45 | - | 0.65 | V |
| | | $I_O = 8 \text{ mA}; V_{CC} = 2.3 \text{ V}$ | - | - | 0.6 | - | 0.8 | V |
| | | $I_O = 12 \text{ mA}; V_{CC} = 2.7 \text{ V}$ | - | - | 0.4 | - | 0.6 | V |
| | | $I_O = 24 \text{ mA}; V_{CC} = 3.0 \text{ V}$ | - | - | 0.55 | - | 0.8 | V |
| lı | input leakage current | $V_{CC} = 3.6 \text{ V}; V_{I} = 5.5 \text{ V or GND}$ | - | ±0.1 | ±5 | - | ±20 | μА |
| cc | supply current | $V_{CC} = 3.6 \text{ V}; V_I = V_{CC} \text{ or GND};$ $I_O = 0 \text{ A}$ | - | 0.1 | 10 | - | 40 | μΑ |
| 7l ^{CC} | additional supply current | per input pin; $V_{CC} = 2.7 \text{ V to } 3.6 \text{ V};$ $V_I = V_{CC} - 0.6 \text{ V}; I_O = 0 \text{ A}$ | - | 5 | 500 | - | 5000 | μΑ |
| Cı | input capacitance | $V_{CC} = 0 \text{ V to } 3.6 \text{ V};$ $V_{I} = \text{GND to } V_{CC}$ | - | 4.0 | - | - | - | pF |

^[1] All typical values are measured at V_{CC} = 3.3 V (unless stated otherwise) and T_{amb} = 25 °C.

10. Dynamic characteristics

Table 7. Dynamic characteristics

Voltages are referenced to GND (ground = 0 V). For test circuit see Figure 7.

| Symbol | Parameter | Conditions | Conditions | | | | -40 °C to | o +125 °C | Unit |
|--------------------|-------------------|--|------------|-----|--------|-----|-----------|-----------|------|
| | | | | Min | Typ[1] | Max | Min | Max | |
| t_{pd} | propagation delay | nA, nB to nY; see Figure 6 | [2] | | | | | | |
| | | V _{CC} = 1.2 V | | - | 11.0 | - | - | - | ns |
| | | $V_{CC} = 1.65 \text{ V to } 1.95 \text{ V}$ | | 0.5 | 4.2 | 9.0 | 0.5 | 10.4 | ns |
| | | $V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$ | | 1.0 | 2.5 | 6.9 | 1.0 | 8.0 | ns |
| | | $V_{CC} = 2.7 \text{ V}$ | | 1.5 | 2.5 | 4.8 | 1.5 | 5.6 | ns |
| | | $V_{CC} = 3.0 \text{ V to } 3.6 \text{ V}$ | | 1.0 | 2.3 | 4.1 | 1.0 | 4.8 | ns |
| t _{sk(o)} | output skew time | $V_{CC} = 3.0 \text{ V to } 3.6 \text{ V}$ | [3] | - | - | 1.0 | - | 1.5 | ns |
| C_{PD} | power dissipation | per gate; $V_I = GND$ to V_{CC} | <u>[4]</u> | | | | | | |
| | capacitance | $V_{CC} = 1.65 \text{ V to } 1.95 \text{ V}$ | | - | 4.4 | - | | | pF |
| | | $V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$ | | - | 7.7 | - | - | - | pF |
| | | $V_{CC} = 3.0 \text{ V to } 3.6 \text{ V}$ | | - | 10.5 | - | - | - | pF |

^[1] Typical values are measured at T_{amb} = 25 °C and V_{CC} = 1.2 V, 1.8 V, 2.5 V, 2.7 V, and 3.3 V respectively.

$$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma (C_L \times V_{CC}^2 \times f_o) \text{ where:}$$

 f_i = input frequency in MHz, f_o = output frequency in MHz


C_L = output load capacitance in pF

V_{CC} = supply voltage in Volts

N = number of inputs switching

 $\Sigma(C_L \times V_{CC}^2 \times f_o)$ = sum of the outputs.

11. AC waveforms

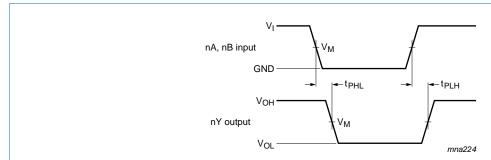

 V_M = 1.5 V at $V_{CC} \geq 2.7 \ V$

 $V_M = 0.5 \times V_{CC}$ at $V_{CC} < 2.7 \text{ V}$


 V_{OL} and V_{OH} are typical output voltage levels that occur with the output load.

Fig 6. The input nA, nB to output nY propagation delays

^[2] t_{pd} is the same as t_{PLH} and t_{PHL} .

^[3] Skew between any two outputs of the same package switching in the same direction. This parameter is guaranteed by design.

^[4] C_{PD} is used to determine the dynamic power dissipation (P_D in μW).

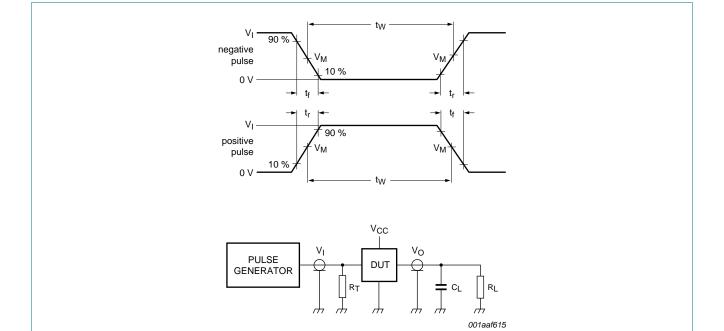

Test data is given in Table 8. Definitions for test circuit:

R_L = Load resistance

C_L = Load capacitance including jig and probe capacitance

 R_T = Termination resistance should be equal to output impedance Z_0 of the pulse generator

Fig 7. Test circuit for measuring switching times


Table 8. Test data

| Supply voltage | Input | | Load | |
|------------------|-----------------|---------------------------------|-------|----------------|
| | V _I | t _r , t _f | CL | R _L |
| 1.2 V | V _{CC} | ≤ 2 ns | 30 pF | 1 kΩ |
| 1.65 V to 1.95 V | V _{CC} | ≤ 2 ns | 30 pF | 1 kΩ |
| 2.3 V to 2.7 V | V _{CC} | ≤ 2 ns | 30 pF | 500 Ω |
| 2.7 V | 2.7 V | ≤ 2.5 ns | 50 pF | 500 Ω |
| 3.0 V to 3.6 V | 2.7 V | ≤ 2.5 ns | 50 pF | $500~\Omega$ |

12. Package outline

SO14: plastic small outline package; 14 leads; body width 3.9 mm

SOT108-1

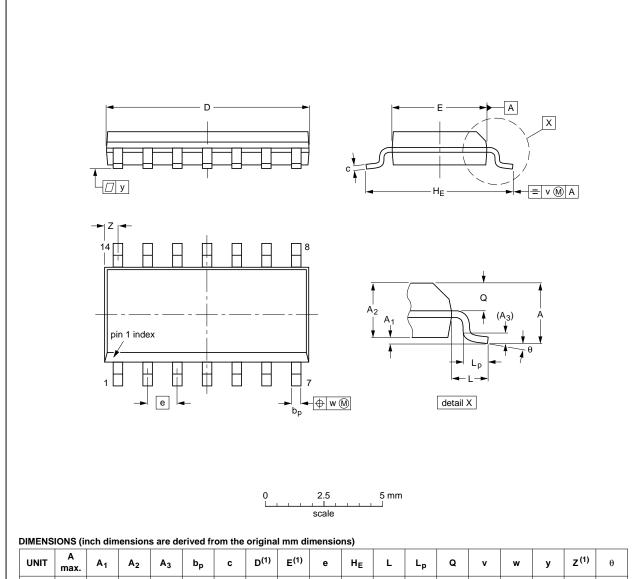

| UNIT | A max. | A ₁ | A ₂ | A ₃ | bp | С | D ⁽¹⁾ | E ⁽¹⁾ | е | HE | L | Lp | Q | v | w | у | z ⁽¹⁾ | θ |
|--------|-----------|----------------|----------------|----------------|--------------|------------------|------------------|------------------|------|----------------|-------|----------------|----------------|------|------|-------|------------------|----|
| mm | 1.75 | 0.25 0.10 | 1.45 1.25 | 0.25 | 0.49 0.36 | 0.25 0.19 | 8.75 8.55 | 4.0 3.8 | 1.27 | 6.2 5.8 | 1.05 | 1.0 0.4 | 0.7 0.6 | 0.25 | 0.25 | 0.1 | 0.7 0.3 | 8° |
| inches | 0.069 | 0.010 0.004 | 0.057 0.049 | 0.01 | | 0.0100 0.0075 | 0.35 0.34 | 0.16 0.15 | 0.05 | 0.244 0.228 | 0.041 | 0.039 0.016 | 0.028 0.024 | 0.01 | 0.01 | 0.004 | 0.028 0.012 | 0° |

Note


1. Plastic or metal protrusions of 0.15 mm (0.006 inch) maximum per side are not included.

| OUTLINE | | REFER | ENCES | EUROPEAN | ISSUE DATE |
|----------|--------|--------|-------|------------|---------------------------------|
| VERSION | IEC | JEDEC | JEITA | PROJECTION | ISSUE DATE |
| SOT108-1 | 076E06 | MS-012 | | | 99-12-27 03-02-19 |

Fig 8. Package outline SOT108-1 (SO14)

TSSOP14: plastic thin shrink small outline package; 14 leads; body width 4.4 mm

SOT402-1

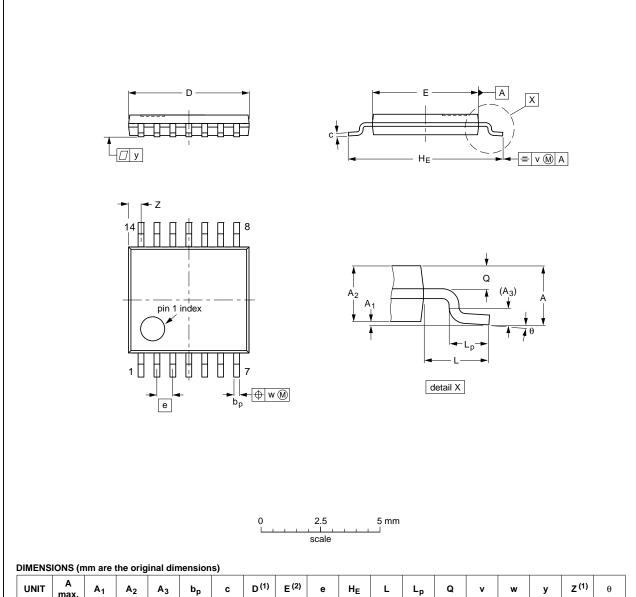

| UNIT | A max. | A ₁ | A ₂ | A ₃ | bp | C | D ⁽¹⁾ | E ⁽²⁾ | е | HE | ٦ | Lp | ø | v | w | у | Z ⁽¹⁾ | θ |
|------|-----------|----------------|----------------|----------------|--------------|------------|------------------|------------------|------|------------|---|--------------|------------|-----|------|-----|------------------|----------|
| mm | 1.1 | 0.15 0.05 | 0.95 0.80 | 0.25 | 0.30 0.19 | 0.2 0.1 | 5.1 4.9 | 4.5 4.3 | 0.65 | 6.6 6.2 | 1 | 0.75 0.50 | 0.4 0.3 | 0.2 | 0.13 | 0.1 | 0.72 0.38 | 8° 0° |

Notes

- 1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.
- 2. Plastic interlead protrusions of 0.25 mm maximum per side are not included.

| OUTLINE | | REFER | ENCES | EUROPEAN | ISSUE DATE |
|----------|-----|--------|-------|------------|---------------------------------|
| VERSION | IEC | JEDEC | JEITA | PROJECTION | ISSUE DATE |
| SOT402-1 | | MO-153 | | | 99-12-27 03-02-18 |

Fig 9. Package outline SOT402-1 (TSSOP14)

DHVQFN14: plastic dual in-line compatible thermal enhanced very thin quad flat package; no leads; 14 terminals; body 2.5 x 3 x 0.85 mm SOT762-1

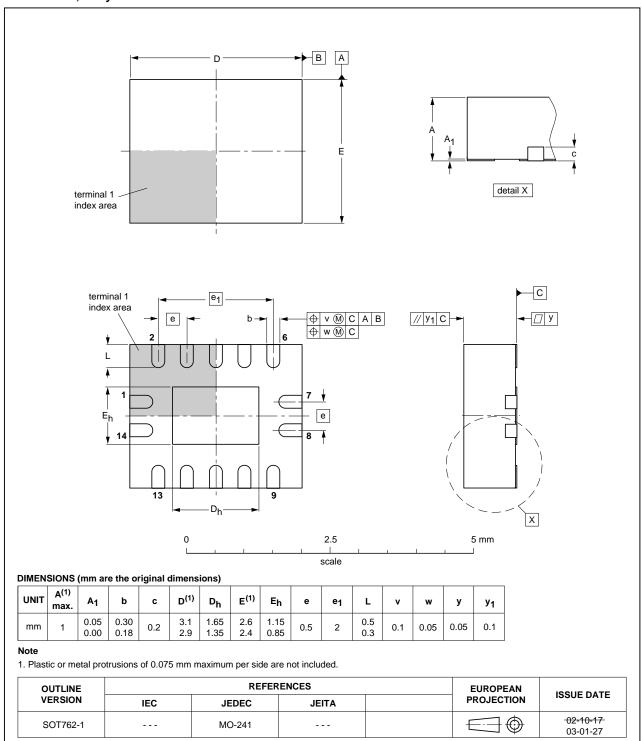


Fig 10. Package outline SOT762-1 (DHVQFN14)

74LVC08A_Q100 All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2012. All rights reserved.

13. Abbreviations

Table 9. Abbreviations

| Acronym | Description |
|---------|-----------------------------|
| CDM | Charged Device Model |
| DUT | Device Under Test |
| ESD | ElectroStatic Discharge |
| HBM | Human Body Model |
| MM | Machine Model |
| TTL | Transistor-Transistor Logic |
| MIL | Military |

14. Revision history

Table 10. Revision history

| Document ID | Release date | Data sheet status | Change notice | Supersedes |
|-------------------|--------------|--------------------|---------------|------------|
| 74LVC08A_Q100 v.1 | 20120731 | Product data sheet | - | - |

15. Legal information

15.1 Data sheet status

| Document status[1][2] | Product status[3] | Definition |
|--------------------------------|-------------------|---|
| Objective [short] data sheet | Development | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet | Qualification | This document contains data from the preliminary specification. |
| Product [short] data sheet | Production | This document contains the product specification. |

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions"
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nxp.com.

15.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

15.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use in automotive applications — This NXP Semiconductors product has been qualified for use in automotive applications. Unless otherwise agreed in writing, the product is not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for

inclusion and/or use of NXP Semiconductors products in such equipment or

applications and therefore such inclusion and/or use is at the customer's own

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nxp.com/profile/terms, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

74LVC08A-Q100

Quad 2-input AND gate

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Translations — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

15.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

16. Contact information

For more information, please visit: http://www.nxp.com

For sales office addresses, please send an email to: salesaddresses@nxp.com

17. Contents

| 1 | General description 1 |
|------|------------------------------------|
| 2 | Features and benefits |
| 3 | Ordering information 2 |
| 4 | Functional diagram 2 |
| 5 | Pinning information 3 |
| 5.1 | Pinning |
| 5.2 | Pin description |
| 6 | Functional description 3 |
| 7 | Limiting values 4 |
| 8 | Recommended operating conditions 4 |
| 9 | Static characteristics 5 |
| 10 | Dynamic characteristics 6 |
| 11 | AC waveforms 6 |
| 12 | Package outline 8 |
| 13 | Abbreviations |
| 14 | Revision history |
| 15 | Legal information |
| 15.1 | Data sheet status |
| 15.2 | Definitions |
| 15.3 | Disclaimers |
| 15.4 | Trademarks13 |
| 16 | Contact information |
| 17 | Contents |
| | |

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.