Dual NPN Bias Resistor Transistors

R1 = 10 k Ω , R2 = 10 k Ω

NPN Transistors with Monolithic Bias Resistor Network

This series of digital transistors is designed to replace a single device and its external resistor bias network. The Bias Resistor Transistor (BRT) contains a single transistor with a monolithic bias network consisting of two resistors; a series base resistor and a base-emitter resistor. The BRT eliminates these individual components by integrating them into a single device. The use of a BRT can reduce both system cost and board space.

Features

- Simplifies Circuit Design
- Reduces Board Space
- Reduces Component Count
- S and NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable*
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

MAXIMUM RATINGS

(T_A = 25°C, common for Q₁ and Q₂, unless otherwise noted)

Rating	Symbol	Max	Unit
Collector-Base Voltage	V _{CBO}	50	Vdc
Collector-Emitter Voltage	V _{CEO}	50	Vdc
Collector Current - Continuous	Ic	100	mAdc
Input Forward Voltage	V _{IN(fwd)}	40	Vdc
Input Reverse Voltage	V _{IN(rev)}	10	Vdc

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

ORDERING INFORMATION

Device	Package	Shipping [†]
MUN5211DW1T1G, SMUN5211DW1T1G*	SOT-363	3,000 / Tape & Reel
NSVMUN5211DW1T2G*	SOT-363	3,000 / Tape & Reel
NSVMUN5211DW1T3G*	SOT-363	10,000 / Tape & Reel
NSBC114EDXV6T1G, NSVBC114EDXV6T1G*	SOT-563	4,000 / Tape & Reel
NSBC114EDXV6T5G	SOT-563	8,000 / Tape & Reel
NSBC114EDP6T5G	SOT-963	8,000 / Tape & Reel


[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.



ON Semiconductor®

www.onsemi.com

PIN CONNECTIONS



MARKING DIAGRAMS



SOT-363 **CASE 419B**





SOT-563 CASE 463A





SOT-963 CASE 527AD



= Specific Device Code 7A/A

= Date Code* М = Pb-Free Package

(Note: Microdot may be in either location)

*Date Code orientation may vary depending upon manufacturing location.

THERMAL CHARACTERISTICS

	Characteristic	Symbol	Max	Unit
MUN5211DW1 (SOT-363) ON	E JUNCTION HEATED	•		
Total Device Dissipation T _A = 25°C (Note 1) (Note 2) Derate above 25°C (Note 2)	(Note 1)	P _D	187 256 1.5 2.0	mW mW/°C
Thermal Resistance, Junction to Ambient	(Note 1) (Note 2)	$R_{ hetaJA}$	670 490	°C/W
MUN5211DW1 (SOT-363) BC	TH JUNCTION HEATED (Note 3)			
Total Device Dissipation $T_A = 25^{\circ}C \qquad \text{(Note 1)}$ (Note 2) Derate above 25°C (Note 2)	(Note 1)	P _D	250 385 2.0 3.0	mW mW/°C
Thermal Resistance, Junction to Ambient (Note 2)	(Note 1)	$R_{ heta JA}$	493 325	°C/W
Thermal Resistance, Junction to Lead (Note 1) (Note 2)		$R_{ hetaJL}$	188 208	°C/W
Junction and Storage Temper	ature Range	T _J , T _{stg}	-55 to +150	°C
NSBC114EDXV6 (SOT-563)	ONE JUNCTION HEATED			
Total Device Dissipation $T_A = 25^{\circ}C$ (Note 1) Derate above $25^{\circ}C$	(Note 1)	P _D	357 2.9	mW mW/°C
Thermal Resistance, Junction to Ambient	(Note 1)	$R_{ heta JA}$	350	°C/W
NSBC114EDXV6 (SOT-563) I	BOTH JUNCTION HEATED (Note 3)			
Total Device Dissipation $T_A = 25^{\circ}C$ (Note 1) Derate above $25^{\circ}C$	(Note 1)	P _D	500 4.0	mW mW/°C
Thermal Resistance, Junction to Ambient	(Note 1)	$R_{ hetaJA}$	250	°C/W
Junction and Storage Temper	ature Range	T _J , T _{stg}	-55 to +150	°C
NSBC114EDP6 (SOT-963) O	NE JUNCTION HEATED			
$ \begin{aligned} & \text{Total Device Dissipation} \\ & T_{\text{A}} = 25^{\circ}\text{C} & (\text{Note 4}) \\ & (\text{Note 5}) \\ & \text{Derate above 25}^{\circ}\text{C} \\ & (\text{Note 5}) \end{aligned} $	(Note 4)	P _D	231 269 1.9 2.2	MW mW/°C
Thermal Resistance, Junction to Ambient (Note 5)	(Note 4)	$R_{ hetaJA}$	540 464	°C/W
NSBC114EDP6 (SOT-963) B	OTH JUNCTION HEATED (Note 3)			
Total Device Dissipation $T_A = 25^{\circ}C \qquad \text{(Note 4)}$ (Note 5) Derate above 25 $^{\circ}$ C (Note 5)	(Note 4)	P _D	339 408 2.7 3.3	MW mW/°C
Thermal Resistance, Junction to Ambient (Note 5)	(Note 4)	$R_{ heta JA}$	369 306	°C/W
Junction and Storage Temper	ature Range	T _J , T _{stg}	-55 to +150	°C


- FR-4 @ Minimum Pad.
 FR-4 @ 1.0 × 1.0 Inch Pad.
 Both junction heated values assume total power is sum of two equally powered channels.
 FR-4 @ 100 mm², 1 oz. copper traces, still air.
 FR-4 @ 500 mm², 1 oz. copper traces, still air.

ELECTRICAL CHARACTERISTICS ($T_A = 25$ °C, common for Q_1 and Q_2 , unless otherwise noted)

Characteristic	Symbol	Min	Тур	Max	Unit
OFF CHARACTERISTICS			•	1	•
Collector-Base Cutoff Current $(V_{CB} = 50 \text{ V}, I_E = 0)$	Ісво	-	-	100	nAdc
Collector-Emitter Cutoff Current (V _{CE} = 50 V, I _B = 0)	I _{CEO}	-	-	500	nAdc
Emitter-Base Cutoff Current $(V_{EB} = 6.0 \text{ V}, I_C = 0)$	I _{EBO}	-	-	0.5	mAdc
Collector-Base Breakdown Voltage (I _C = 10 μA, I _E = 0)	V _{(BR)CBO}	50	-	-	Vdc
Collector-Emitter Breakdown Voltage (Note 6) (I _C = 2.0 mA, I _B = 0)	V _{(BR)CEO}	50	-	-	Vdc
ON CHARACTERISTICS					
DC Current Gain (Note 6) (I _C = 5.0 mA, V _{CE} = 10 V)	h _{FE}	35	60	-	
Collector-Emitter Saturation Voltage (Note 6) $(I_C = 10 \text{ mA}, I_B = 0.3 \text{ mA})$	V _{CE(sat)}	-	-	0.25	V
Input Voltage (Off) ($V_{CE} = 5.0 \text{ V}, I_C = 100 \mu\text{A}$)	V _{i(off)}	-	1.2	-	Vdc
Input Voltage (On) (V _{CE} = 0.2 V, I _C = 10 mA)	V _{i(on)}	-	2.0	-	Vdc
Output Voltage (On) ($V_{CC} = 5.0 \text{ V}, V_B = 2.5 \text{ V}, R_L = 1.0 \text{ k}\Omega$)	V _{OL}	-	-	0.2	Vdc
Output Voltage (Off) (V _{CC} = 5.0 V, V _B = 0.5 V, R _L = 1.0 k Ω)	V _{OH}	4.9	-	-	Vdc
Input Resistor	R1	7.0	10	13	kΩ
Resistor Ratio	R ₁ /R ₂	0.8	1.0	1.2	

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

6. Pulsed Condition: Pulse Width = 300 ms, Duty Cycle ≤ 2%.



- (1) SOT-363; 1.0 × 1.0 Inch Pad
- (2) SOT-563; Minimum Pad
- (3) SOT-963; 100 mm², 1 oz. Copper Trace

Figure 1. Derating Curve

TYPICAL CHARACTERISTICS MUN5211DW1, NSBC114EDXV6

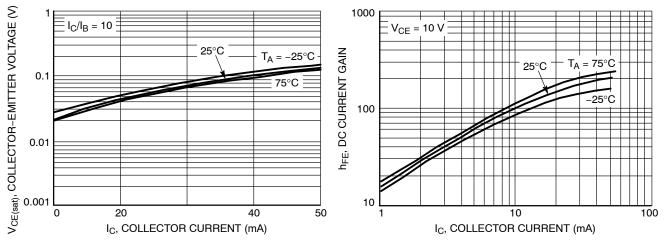


Figure 2. V_{CE(sat)} vs. I_C

Figure 3. DC Current Gain

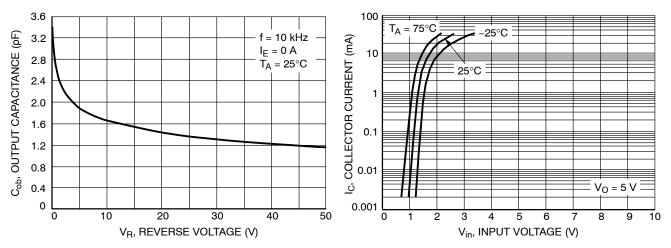


Figure 4. Output Capacitance

Figure 5. Output Current vs. Input Voltage





Figure 6. Input Voltage vs. Output Current

TYPICAL CHARACTERISTICS NSBC114EDP6

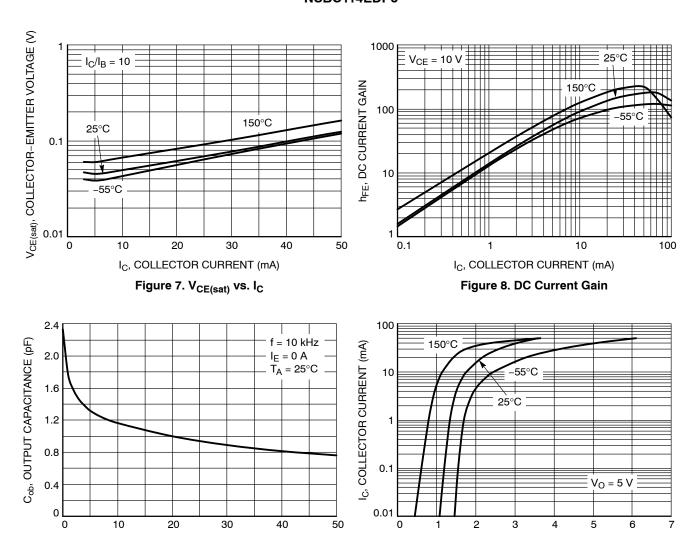

 V_R , REVERSE VOLTAGE (V) Figure 9. Output Capacitance

 $\label{eq:Vin} V_{in}\text{, INPUT VOLTAGE (V)}$ Figure 10. Output Current vs. Input Voltage






Figure 11. Input Voltage vs. Output Current

PACKAGE DIMENSIONS

SC-88/SC70-6/SOT-363

CASE 419B-02 **ISSUE Y**

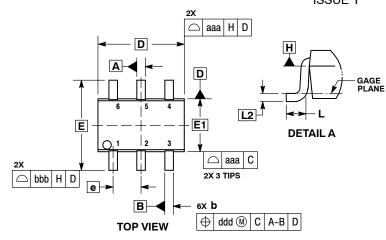

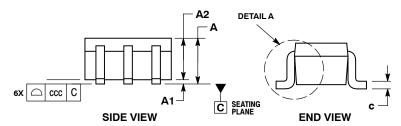

- DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
- DIMENSIONING AND TOLERANCING PER ASMEY 14.5M, 1994.
 CONTROLLING DIMENSION: MILLIMETERS.
 DIMENSIONS D AND E1 DO NOT INCLUDE MOLD FLASH,
 PROTRUSIONS, OR GATE BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.20 PER END.
 DIMENSIONS D AND E1 AT THE OUTERMOST EXTREMES OF
 THE PLASTIC BODY AND DATUM H.
- THE FLASTIC BOOT FIND DATOM IN.

 DATUMS A AND B ARE DETERMINED AT DATUM H.


 DIMENSIONS b AND c APPLY TO THE FLAT SECTION OF THE

 LEAD BETWEEN 0.08 AND 0.15 FROM THE TIP.

 DIMENSION b DOES NOT INCLUDE DAMBAR PROTRUSION.
- ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 TOTAL IN EXCESS OF DIMENSION b AT MAXIMUM MATERIAL CONDI-TION. THE DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OF THE FOOT.

	MILLIMETERS INCHES			3		
DIM	MIN	NOM	MAX	MIN	NOM	MAX
Α			1.10			0.043
A1	0.00		0.10	0.000		0.004
A2	0.70	0.90	1.00	0.027	0.035	0.039
b	0.15	0.20	0.25	0.006	0.008	0.010
С	0.08	0.15	0.22	0.003	0.006	0.009
D	1.80	2.00	2.20	0.070	0.078	0.086
E	2.00	2.10	2.20	0.078	0.082	0.086
E1	1.15	1.25	1.35	0.045	0.049	0.053
е	0.65 BSC		0.026 BSC			
L	0.26	0.36	0.46	0.010	0.014	0.018
L2	0.15 BSC			0.006 BSC		
aaa	0.15			0.006		
bbb	0.30				0.012	
ccc	0.10				0.004	
ddd	0.10				0.004	


RECOMMENDED SOLDERING FOOTPRINT*



*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

PACKAGE DIMENSIONS


SOT-563, 6 LEAD CASE 463A ISSUE G



- NOTES:
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: MILLIMETERS
 3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.

	MILLIMETERS			INCHES		
DIM	MIN	NOM	MAX	MIN	NOM	MAX
Α	0.50	0.55	0.60	0.020	0.021	0.023
b	0.17	0.22	0.27	0.007	0.009	0.011
C	0.08	0.12	0.18	0.003	0.005	0.007
D	1.50	1.60	1.70	0.059	0.062	0.066
Е	1.10	1.20	1.30	0.043	0.047	0.051
е		0.5 BSC		C	0.02 BS0	
L	0.10	0.20	0.30	0.004	0.008	0.012
He	1.50	1.60	1.70	0.059	0.062	0.066


SOLDERING FOOTPRINT*





*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

PACKAGE DIMENSIONS

SOT-963 CASE 527AD ISSUE E








NOTES:

- 1. DIMENSIONING AND TOLERANCING PER ASME Y14 5M 1994
- Y14.5M, 1994.
 2. CONTROLLING DIMENSION: MILLIMETERS
- MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
- DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.

	MILLIMETERS					
DIM	MIN	NOM	MAX			
Α	0.34	0.37	0.40			
b	0.10	0.15	0.20			
С	0.07	0.12	0.17			
D	0.95	1.00	1.05			
E	0.75	0.80	0.85			
е	0.35 BSC					
HE	0.95	1.00	1.05			
L	0.19 REF					
L2	0.05	0.10	0.15			

RECOMMENDED MOUNTING FOOTPRINT*



*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and image retrademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns me rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any product herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800-282-9855 Toll Free USA/Canada

Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910 Japan Customer Focus Center

Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative