
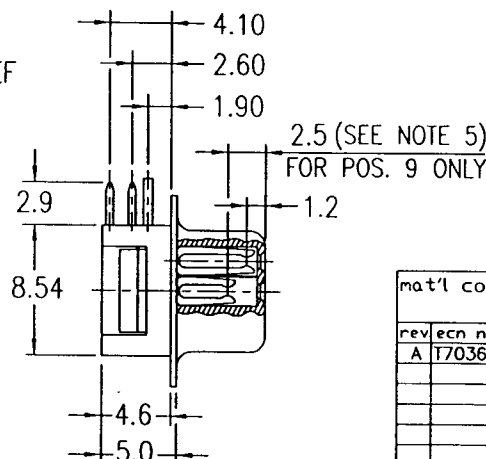
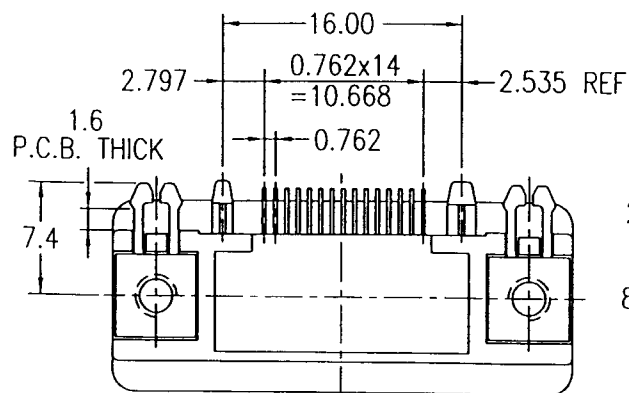
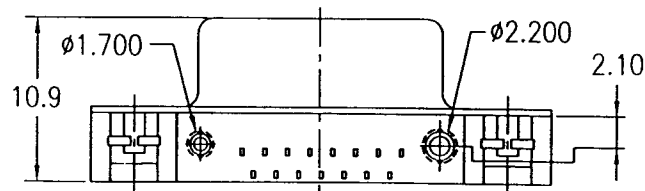


All rights strictly reserved. Reproduction or issue to third parties in any form or by any means, electronic or mechanical, including photocopying, recording, or by any information storage and retrieval system, is not permitted without written authority from the proprietor.
 Tous droits strictement réservés. Reproduction ou communication à des tiers en toute forme ou par quelque moyen que ce soit sans autorisation écrite du propriétaire.
 Property of c BERG ELECTRONICS. Copyright BERG ELECTRONICS by

PRODUCT NO.
74039-XXXXXX

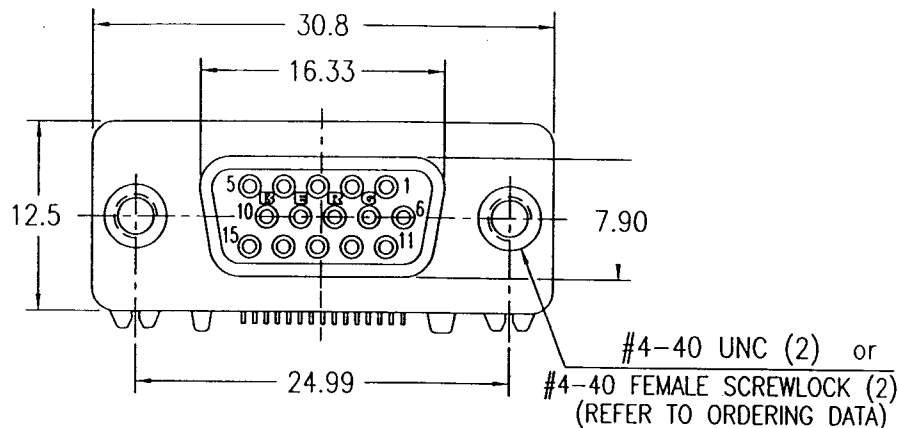


ORDERING DATA

74039-X X X X 15


- NO. OF CONTACT
- SHELL PLATING / PACKAGING
 - 0 - NICKEL PLATING / TRAY
 - 2 - NICKEL PLATING / TUBE
- INSULATOR
 - 0 - PBT MAT'L, BLACK
 - 1 - PBT MAT'L, BLUE
 - 5 - PCT MAT'L, BLACK
- FEMALE SCREWLOCK
 - 0 - WITHOUT SCREWLOCK
 - 1 - WITH #4-40 SCREWLOCKS (UNASSEMBLED)
 - 2 - WITH #4-40 SCREWLOCKS (ASSEMBLED)
- CONTACT PLATING
 - 1 - 3u"Au
 - 2 - 10u"Au
 - 4 - 30u"Au

mat'l code				tolerance unless otherwise specified		CUSTOMER COPY		BERG ELECTRONICS	
rev	ecn no.	dr	date	linear	0.0±0.3	projection	title	SUPER SLIM D-SUB HD15P R/A F/M SPECIAL	
A	T70362	JC	10/20/97	angles	0.00±0.2 0.000±0.1	MM	product family D-SUB		
				dr	J C LAI 10/9/97	unit	size	code	
				enqr	J C LAI 10/9/97	scale	dwg no.	TWN	
				chr	C L CHEN 10/9/97		74039	sheet	
				appd	C L CHEN 10/9/97			1 OF 2	
sheet rev.	A	A							
sheet index	1	2							

PRODUCT NO.
74039-XXXXXX

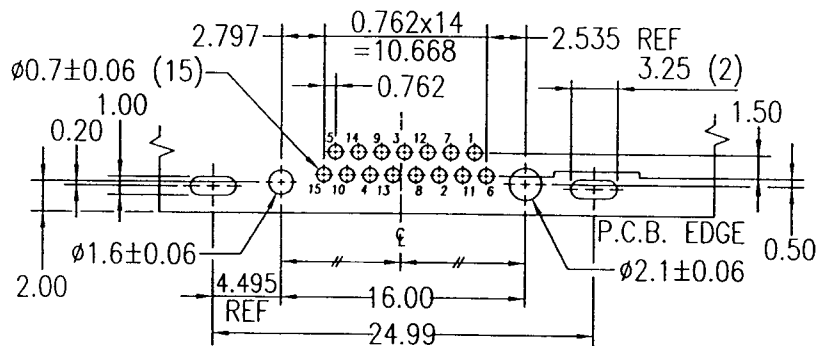

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

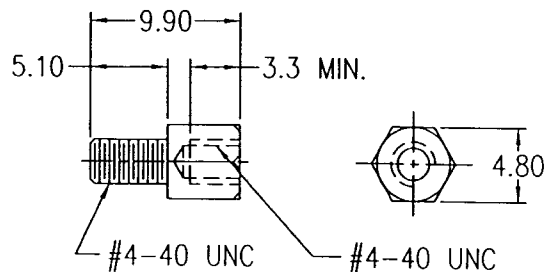

FEMALE SCREWLOCK
(SEE ORDERING DATA LEGEND)

NOTES :

1. MATERIAL :

- * INSULATORS- GLASS FIBER FILLED POLYESTER, UL 94V-0. (REFER TO ORDERING DATA)
- * CONTACTS- PHOSPHOR BRONZE.
- * METAL SHELL- LOW CARBON STEEL.
- * BOARDLOCKS- BRASS
- * THREADED INSERTS- BRASS
- * FEMALE SCREWLOCKS- BRASS

2. FINISH :

- * CONTACTS- SELECTIVE Au PLATING IN CONTACT AREA (SEE ORDERING DATA LEGEND) AND 100u" MIN. Sn/Pb ON SOLDER TAILS WITH AN OVERALL 50u" MIN. Ni UNDERPLATE.
- * METAL SHELL- NICKEL PLATING.
- * BOARDLOCKS- Sn/Pb OVER Ni UNDERPLATE.
- * THREADED INSERTS- NICKEL PLATING.
- * FEMALE SCREWLOCKS- NICKEL PLATING.

3. PRODUCT SPECIFICATION PER GES-12-019.

4. PACKAGING SPECIFICATION PER GES-14-399.

5. THE CONNECTOR IS DESIGNED TO PROVIDE TWO MATING LEVELS CONTACT FEATURE.

mat'l code				tolerance unless otherwise specified		CUSTOMER COPY		BERG ELECTRONICS	
rev	ecn no.	dr	date	linear	0.0±0.3	projection	title	product family	code
A	T70362	JC	10/20/97		0.00±0.2				
				angles	0.000±0.1				
					± 2°	MM	A3	74039	2 OF 2
		dr	J C LAI	10/9/97					
		enrg	J C LAI	10/9/97					
		chr	C L CHEN	10/9/97					
		appd	C L CHEN	10/9/97					
sheet	rev	SEE SHEET 1							
sheet	index	1	2						