


SAW Bandpass Filter 251917B



1. Features

- IF Bandpass Filter
- High Attenuation
- Single-Ended Operation
- DIP Package
- Maximum Storage Temperature Range : -40°C ~ 85°C
- Electrostatics Sensitive Device (ESD)


2. Package Dimension

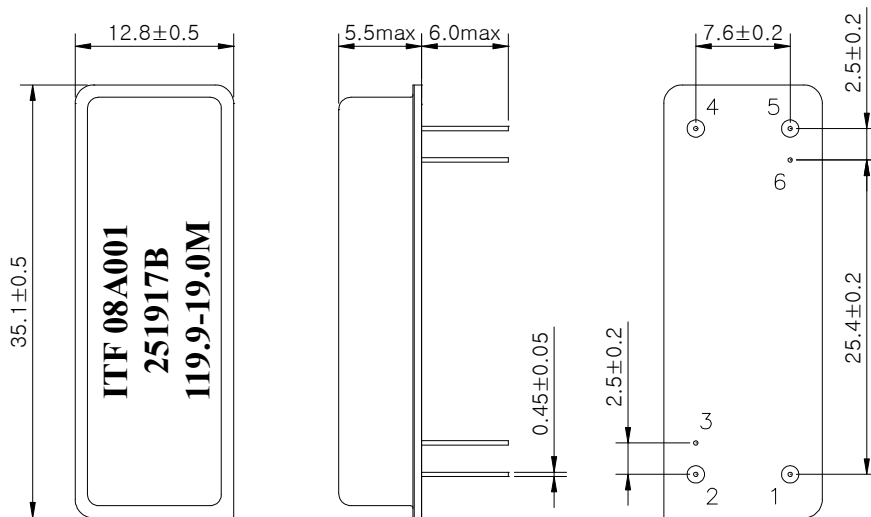

Package : D3512

Dimensions shown are nominal in millimeters
 Base : Fe(SPCC), Au plating over Ni plated
 Cap : Cu & Cr Alloy, Ni Plated
 Termination : Kovar, Au Plated

Pin Configuration	
1	Input
5	Output
2, 4	Ground
3, 6	Case ground

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	251917B	
		Rev. Date	2008-10-30	
		Rev.	NM8054-CS01	1/5

SAW Bandpass Filter 251917B



3. Specifications

Fo = 119.9 MHz


Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

		Minimum	Typical	Maximum
Center Frequency	MHz	-	119.9	-
Insertion Loss	dB	-	28.0	30.0
1dB Bandwidth	MHz	18.9	19.0	-
3dB Bandwidth	MHz	-	19.2	-
40dB Bandwidth	MHz	-	20.06	20.2
Amplitude Ripple (fo ± 9.42 MHz)	dB	-	0.7	2.0
Group Delay Variation (fo ± 9.42 MHz)	nsec	-	70	120
Absolute Delay	usec	-	4.68	-
Ultimate Rejection	dB	50	52	-
Relative Attenuation				
Fo ± 10.0MHz	dB	25	34	-
Temperature Coefficient of Frequency	ppm/°C	-	-18	-

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	251917B	
		Rev. Date	2008-10-30	
		Rev.	NM8054-CS01	2/5

SAW Bandpass Filter 251917B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

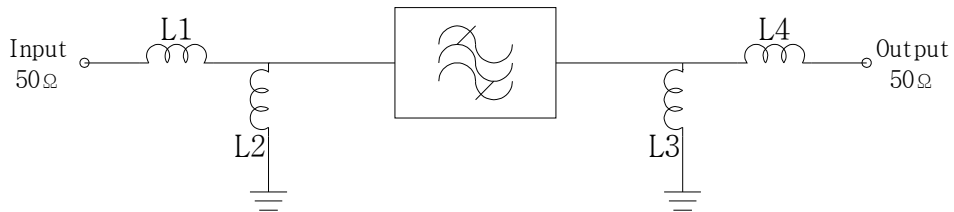

L1=82nH, L2=68nH

L3=68nH, L4=82nH

5. Marking Configuration

ITF¹⁾ 08A001²⁾
 251917B³⁾
 119.9⁴⁾-19.0M⁵⁾



- 1) Manufacturer name
- 2) Lot Number
- 3) Part Number
- 4) Center frequency
- 5) 1dB-Bandwidth

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	251917B	
		Rev. Date	2008-10-30	
		Rev.	NM8054-CS01	3/5

SAW Bandpass Filter 251917B







6. Typical Performance (at +25°C)

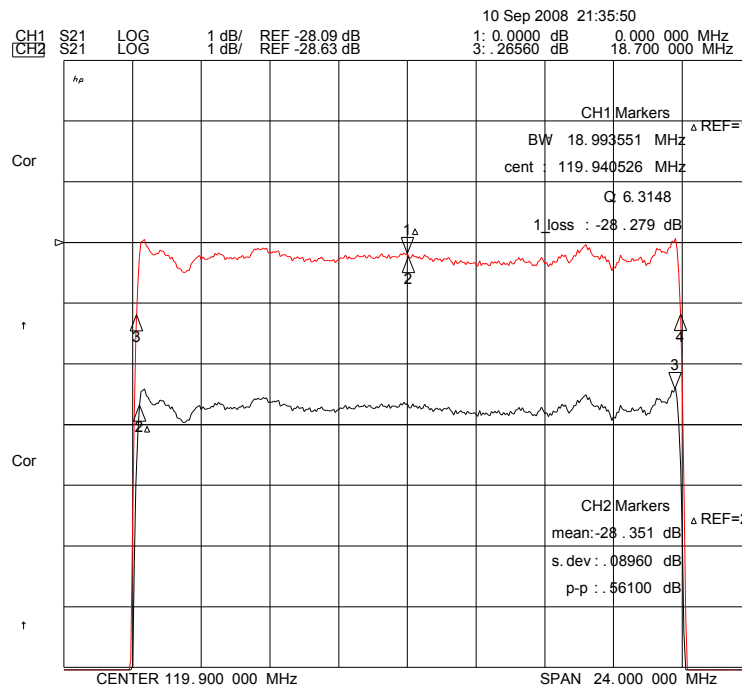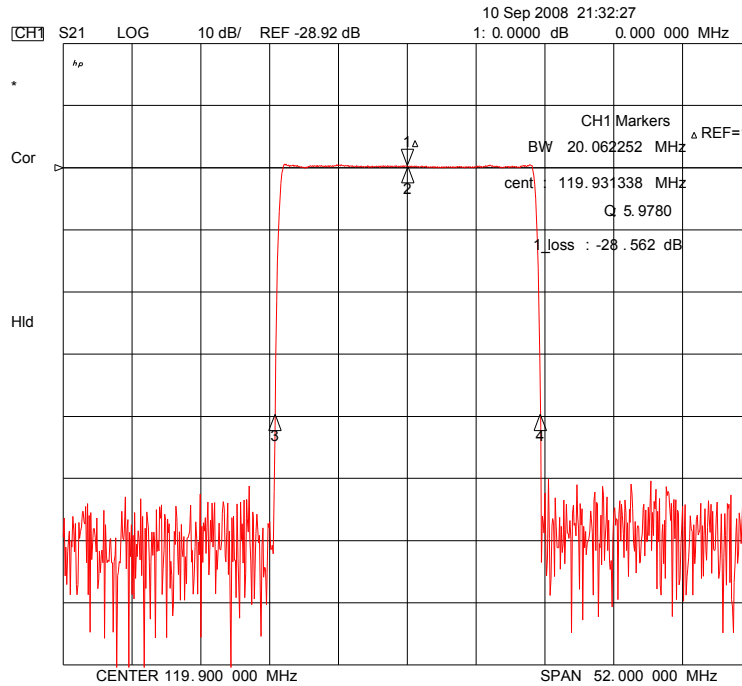

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No.	251917B	
Rev. Date	2008-10-30	
Rev.	NM8054-CS01	4/5

SAW Bandpass Filter 251917B

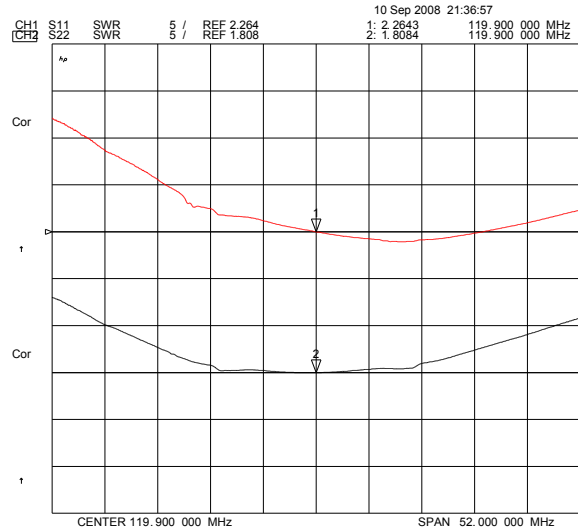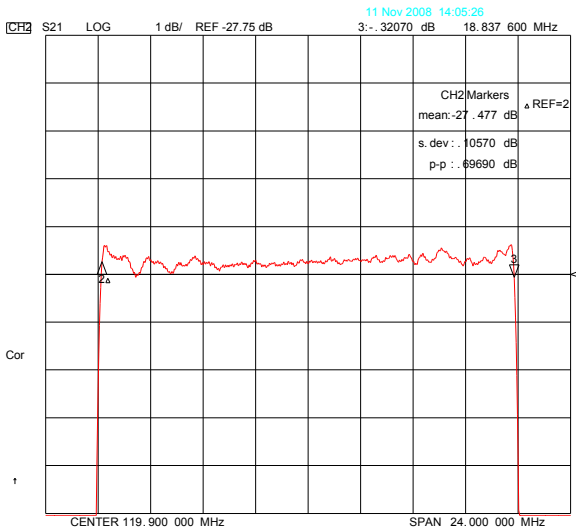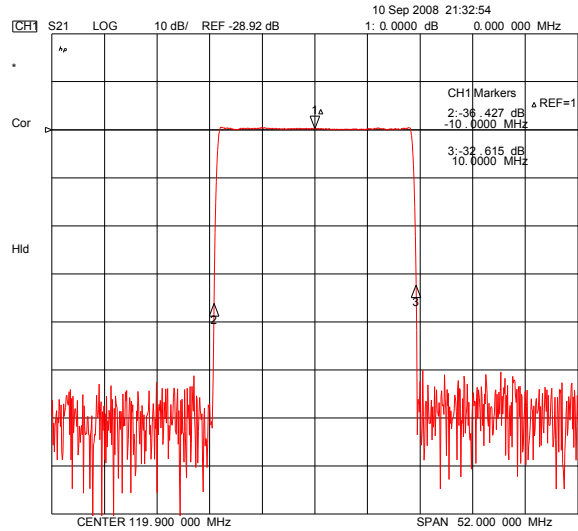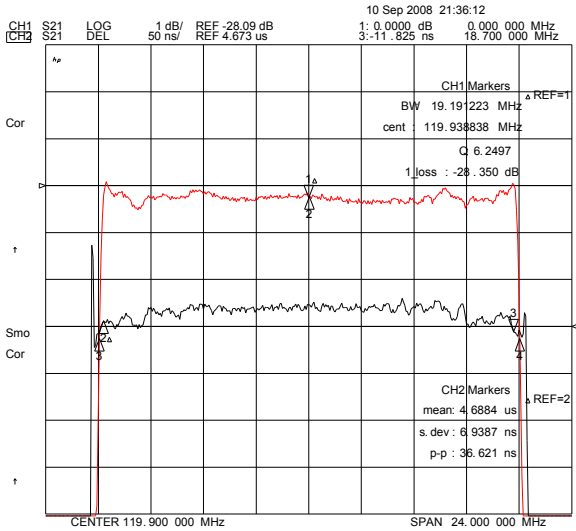

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No.	251917B	
Rev. Date	2008-10-30	
Rev.	NM8054-CS01	5/5