



DATA SHEET

CP600 ~ CP6010

SINGLE-PHASE SILICON BRIDGE-P.C. MTG 3A , HEAT-SINK MTG 6A

VOLTAGE 50 to 1000 Volts CURRENT - P.C. MTG 3A , HEAT-SINK MTG 6A

Recognized File # E111753

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O .
- Surge Overload Ratings to 125 Amperes.
- Low forward voltage, and reverse leakage.
- Small size , simple installation.
- Reliable low cost construction utilizing molded plastic technique.


MECHANICAL DATA

Mounting Position: Any

Weight: 0.2 ounce, 5.6 gram

Terminals: Lead solderable per MIL-STD-202 Method 208

Mounting Torque: 5 in. lb. max.

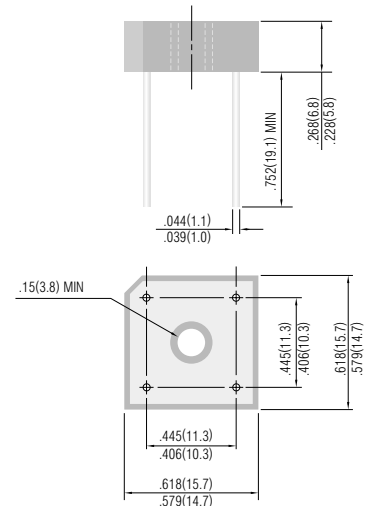

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase , half wave ,60Hz, resistive or inductive load.

For capacitive load , derate current by 20%.

	CP600	CP601	CP602	CP604	CP606	CP608	CP6010	UNITS
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V
Maximum RMS Bridge input Voltage	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	50	100	200	400	600	600	1000	V
Maximum Average Forward Current at $T_C=50^\circ\text{C}$ See Fig 2 at $T_A=25^\circ\text{C}$					6 3			A
Peak Forward Surge Current ,8.3ms single half sine-wave superimposed on rated load					125			A
Maximum Forward Voltage per Bridge Element Specified Current at 3.0A DC & 25°C. See Fig 3					1.1			V
Maximum Reverse Leakage at Rated DC Blocking Voltage per element. at 25°C See Fig 4 at 100°C					10.0 1.0			μA mA
I ² t Rating for fusing (t < 8.35 ms)					127			A ² S
Typical junction capacitance per leg (NOTE 4)C _J					186			pF
Typical Thermal resistance per leg (NOTE 3) R θ JA Typical Thermal resistance per leg (NOTE 2) R θ JC					22.0 7.3			°C/W
Operating Temperature Range T _J					-55 to +125			°C
Storage Temperature Range T _A					-55 to +150			°C

NOTES:

1. Bolt down on heat-sink with silicon thermal compound between bridge and mounting surface for maximum heat transfer with #6 screw.
2. Unit mounted on 5.0 X 6.0 X 0.11" thick (14 X 15 X 0.3 cm)AL.plate.
3. Unit mounted on P.C.B at 0.395"(9.5mm)lead length with 0.5 X 0.5" (12 X 12 mm)copper pads.
4. Measured at 1.0MHZ and applied reverse voltage of 4.0 volts.



RATING AND CHARACTERISTIC CURVES

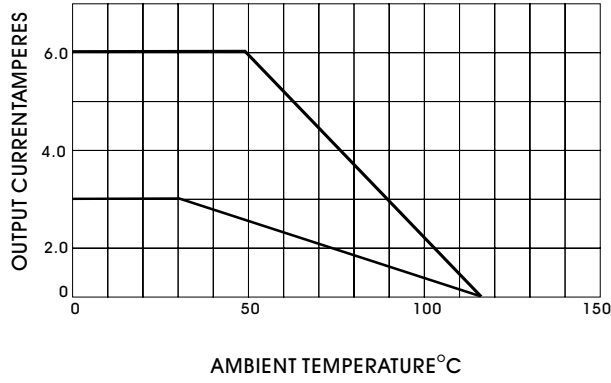


Fig. 1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

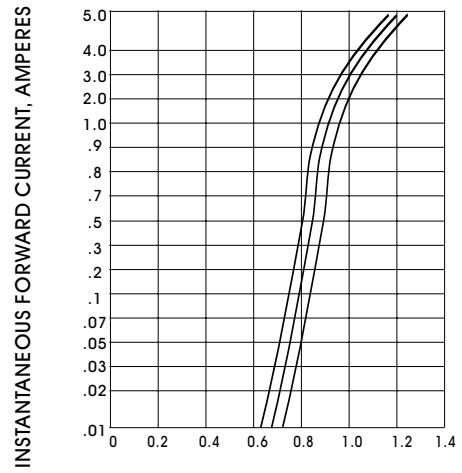


Fig. 2- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS (25°C)

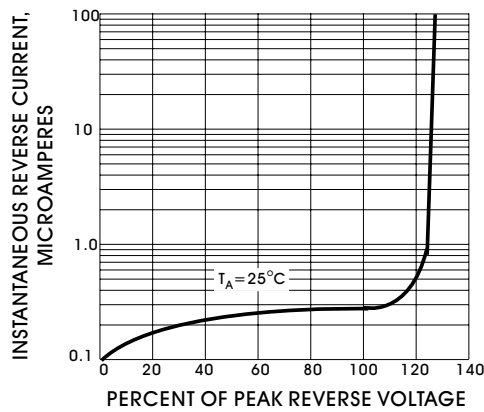


Fig. 3- TYPICAL PEAK REVERSE CHARACTERISTICS

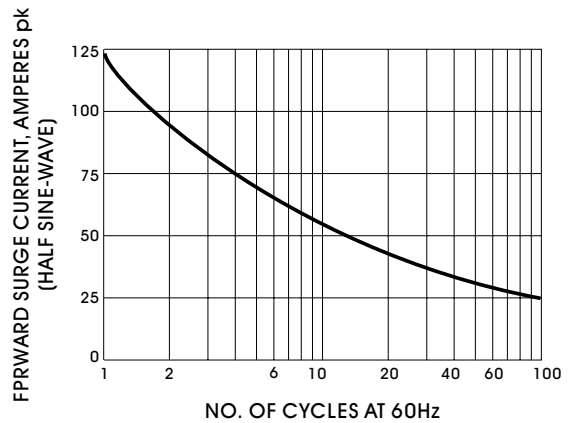


Fig. 4- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT