

High Ohmic/High Voltage Resistors



A metal glazed film is deposited on a high grade ceramic body. After a helical groove has been cut in the resistive layer, tinned electrolytic copper wires are welded to the end-caps. The resistors are coated with a light blue lacquer which provides

FEATURES

- High pulse loading capability
- Small size
- Lead (Pb)-free solder contacts
- Pure tin plating provides compatibility with lead (Pb)-free and lead containing soldering processes
- Compatible with "Restriction of the use of Hazardous Substances" (RoHS) directive 2002/95/EC (issue 2004)



APPLICATIONS

- Where high resistance, high stability and high reliability at high voltage are required
- High humidity environment
- White goods
- Power supplies

electrical, mechanical, and climatic protection.

The encapsulation is resistant to all cleaning solvents in accordance with "MIL-STD 202E, method 215" and "IEC 60068-2-45".

TECHNICAL SPECIFICATIONS	
DESCRIPTION	VALUE
Resistance range ¹⁾	100 kΩ to 22 MΩ
Resistance tolerance and series: 100 kΩ to 15 MΩ 15 MΩ to 22 MΩ	± 1 %: E24/E96 series; ± 5 %: E24 series ± 5 %: E24 series; ± 10 %: E12 series
Maximum dissipation at T _{amb} = 70 °C	0.25 W
Thermal resistance, R _{th}	140 K/W
Temperature coefficient	≤ ± 200 × 10 ⁻⁶ /K
Maximum permissible voltage: DC RMS	1600 V 1150 V
Dielectric withstanding voltage of the insulation for 1 minute	700 V
Basic specifications	IEC 60115-1B
Climatic category (IEC 60068)	55/155/56
Stability after: load (1000 hours) accelerated damp heat test (6 days) long term damp heat test (56 days)	ΔR/R max.: ± 1.5 % + 0.1 Ω ΔR/R max.: ± 1.5 % + 0.1 Ω ΔR/R max.: ± 1.5 % + 0.1 Ω
Noise	max. 5 μV/V

Note

1. Ohmic values (other than resistance range) are available on request.

12NC INFORMATION

- The resistors have a 12-digit numeric code starting with 2322 241
- The subsequent:
first digit for 1 % tolerance products (E24 and E96 series)
or 2 digits for 5 % (E24 series) and 10 % (E12 series)
indicate the resistor type and packing.
- The remaining digits indicate the resistance value:
 - The first 3 digits for 1 % or 2 digits for 5 and 10 % tolerance products indicate the resistance value.
 - The last digit indicates the resistance decade.

Last Digit of 12NC Indicating Resistance Decade

RESISTANCE DECADE	LAST DIGIT
100 to 976 kΩ	4
1 to 9.76 MΩ	5
≥ 10 MΩ	6

12NC Example

The 12NC for a VR25, resistor value 7.5 MΩ, 5 % tolerance, supplied on a bandolier of 1000 units in ammpack, is: 2322 241 13755.



12NC - resistor type and packing						
TYPE	TOL. (%)	ORDERING CODE 2322 241				
		BANDOLIER IN AMMOPACK				BANDOLIER ON REEL
		RADIAL TAPED	STRAIGHT LEADS			
			4000 units	52 mm	26 mm	52 mm
	1000 units	2000 units	5000 units	5000 units		
VR25	± 1	0...	8...	-	7...	6...
	± 5	36...	13...	43...	53...	23...
	± 10	-	12...	42...	52...	22...

PART NUMBER

PART NUMBER: VR2500001503JA100

V	R	2	5	0	0	0	0	0	1	5	0	3	J	A	1	0	0
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

MODEL/SIZE	SPECIAL CHARACTER	TC/MATERIAL	VALUE	TOLERANCE	PACKING ¹⁾	SPECIAL
VR25000	0 = neutral Z = value overflow (Special)	0 = standard	3 digit value 1 digit multiplier Multiplier: 3 = *10 ³ 4 = *10 ⁴ 5 = *10 ⁵	F = ± 1 % J = ± 5 % K = ± 10 %	A5 A2 A1 R5 N4	The 2 digits are used for all special parts. 00 = standard

PRODUCT DESCRIPTION: VR25 5 % A1 150K

VR25	5 %	A1	150K
MODEL/SIZE	TOLERANCE	PACKING ¹⁾	RESISTANCE VALUE
VR25	± 1 % ± 5 % ± 10 %	A1 A5	47K = 47 KΩ 50R1 = 50.1 Ω


¹⁾ Please refer to table PACKING.

Note

Products can be ordererd using either the 12NC or the PART NUMBER. The PART NUMBER is shown to facilitate the introduction of a unified part numbering system. Currently, this PART NUMBER is applicable in the Americas only.

PACKING			
CODE	PIECES	DESCRIPTION	MODEL/SIZE
A5	5000	Bandolier in ammpack straight leads 52 mm	VR25
A2	2000	Bandolier in ammpack straight leads 26 mm	
A1	1000	Bandolier in ammpack straight leads 52 mm	
R5	5000	Bandolier on reel straight leads 52 mm	
N4	4000	Bandolier in ammpack radial taped	

DIMENSIONS

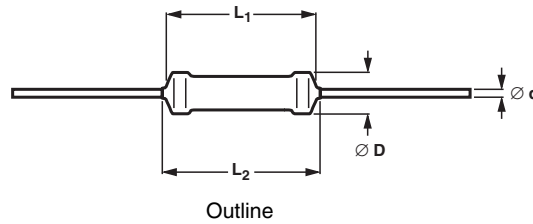

DIMENSIONS - resistor type and relevant physical dimensions				
TYPE	Ø D MAX.	L ₁ MAX.	L ₂ MAX.	Ø d
VR25	2.5	6.5	7.5	0.58 ± 0.05

MASS PER 100 UNITS	
TYPE	MASS (g)
VR25 52 mm	21.2
VR25 26 mm	14.8

Yellow and grey are used instead of gold and silver because metal particles in the lacquer could affect high-voltage properties.

OUTLINES

The length of the body (L₁) is measured by inserting the leads into holes of two identical gauge plates and moving these plates parallel to each other until the resistor body is clamped without deformation (*“IEC publication 60294”*).

MARKING

The nominal resistance and tolerance are marked on the resistor using four or five colored bands in accordance with IEC publication 60062 *“Color codes for fixed resistors”*.

FUNCTIONAL PERFORMANCE

PRODUCT CHARACTERIZATION

Standard values of nominal resistance are taken from the E96/E24/E12 series for resistors with a tolerance of ± 1 %, 5 % or 10 %. The values of the E96/E24/E12 series are in accordance with *“IEC publication 60063”*.


LIMITING VALUES			
TYPE	LIMITING VOLTAGE ¹⁾ (V)		LIMITING POWER (W)
	DC	RMS	
VR25	1600	1150	0.25

Note


1. The maximum voltage that may be continuously applied to the resistor element, see *“IEC publication 60115-1”*.

The maximum permissible hot-spot temperature is 155 °C.

The power that the resistor can dissipate depends on the operating temperature.

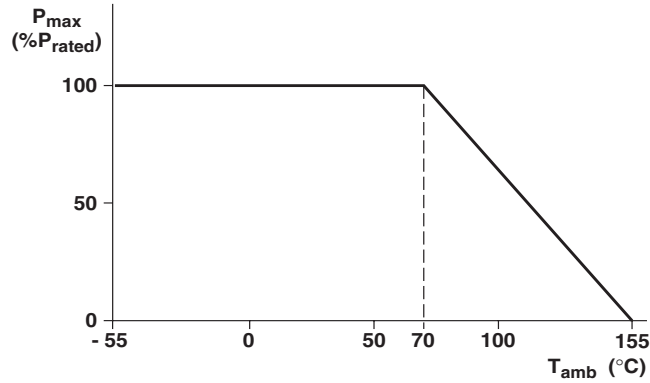


Maximum dissipation (P_{max}) in percentage of rated power as a function of the ambient temperature (T_{amb})

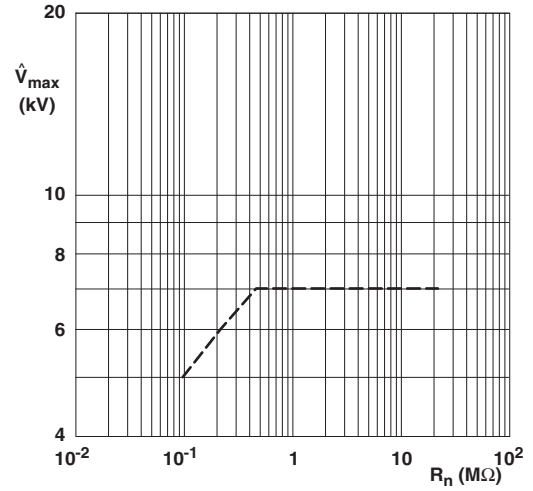


Maximum allowed peak pulse voltage in accordance with "IEC 60065 chapter 14.1"; 50 discharges from a 1 nF capacitor charged to \hat{V}_{max} ; 12 discharges/minute (drift $\Delta R/R \leq 2\%$)

Derating

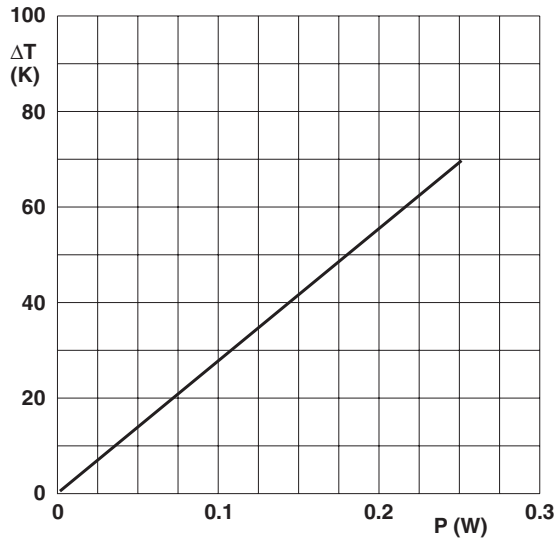

Hot-spot temperature rise (ΔT) as a function of dissipated power

Pulse Loading Capability

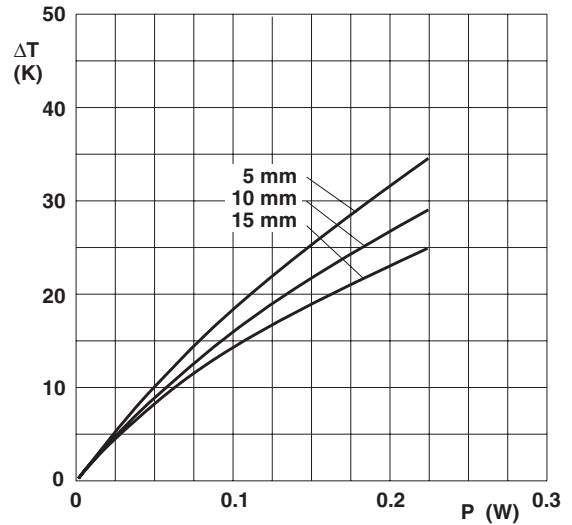

Temperature rise (ΔT) at the lead end (soldering point) as a function of dissipated power at various lead lengths after mounting

Application Information

TESTS AND REQUIREMENTS

Essentially all tests are carried out in accordance with the schedule of "IEC publication 60115-1", category LCT/UCT/56 (rated temperature range: Lower Category Temperature, Upper Category Temperature; damp heat, long term, 56 days). The testing also covers the requirements specified by EIA and EIAJ.

The tests are carried out in accordance with IEC publication 60068-2, "Recommended basic climatic and mechanical robustness testing procedure for electronic components" and under standard atmospheric conditions according to "IEC 60068-1", subclause 5.3.

In the Test Procedures and Requirements table the tests and requirements are listed with reference to the relevant clauses of "IEC publications 60115-1 and 60068-2"; a short description of the test procedure is also given. In some instances deviations from the IEC recommendations were necessary for our method of specifying.

All soldering tests are performed with mildly activated flux.

TEST PROCEDURES AND REQUIREMENTS				
IEC 60115-1 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.16	21 (U)	robustness of terminations:		
4.16.2	21 (Ua1)	tensile all samples	∅ 0.6 mm; load 10 N; 10 s	number of failures < 10×10^{-6}
4.16.3	21 (Ub)	bending half number of samples	∅ 0.6 mm; load 5 N; $4 \times 90^\circ$	number of failures < 10×10^{-6}
4.16.4	21 (Uc)	torsion other half of samples	$3 \times 360^\circ$ in opposite directions	no damage $\Delta R/R$ max.: $\pm 0.5 \% + 0.05 \Omega$
4.17	20 (Ta)	solderability	2 s; 235 °C	good tinning; no damage
4.18	20 (Tb)	resistance to soldering heat	thermal shock: 3 s; 350 °C; 3 mm from body	$\Delta R/R$ max.: $\pm 0.5 \% + 0.05 \Omega$
4.19	14 (Na)	rapid change of temperature	30 minutes at - 55 °C and 30 minutes at + 155 °C; 5 cycles	$\Delta R/R$ max.: $\pm 0.5 \% + 0.05 \Omega$
4.20	29 (Eb)	bump	3×1500 bumps in 3 directions; 40 g	no damage $\Delta R/R$ max.: $\pm 0.5 \% + 0.05 \Omega$
4.22	6 (Fc)	vibration	frequency 10 to 500 Hz; displacement 1.5 mm or acceleration 10 g; 3 directions; total 6 hours (3×2 hours)	no damage $\Delta R/R$ max.: $\pm 0.5 \% + 0.05 \Omega$



TEST PROCEDURES AND REQUIREMENTS				
IEC 60115-1 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.23		climatic sequence:		
4.23.2	2 (Ba)	dry heat	16 hours; 155 °C	
4.23.3	30 (Db)	damp heat (accelerated) 1 st cycle	24 hours; 55 °C; 90 to 100 % RH	
4.23.4	1 (Aa)	cold	2 hours; - 55 °C	
4.23.5	13 (M)	low air pressure	2 hours; 8.5 kPa; 15 to 35 °C	
4.23.6	30 (Db)	damp heat (accelerated) remaining cycles	5 days; 55 °C; 95 to 100 % RH	R _{ins} min.: 10 ³ MΩ ΔR/R max.: ± 1.5 % + 0.1 Ω
4.24.2	3 (Ca)	damp heat (steady state)	56 days; 40 °C; 90 to 95 % RH; dissipation 0.01 P _n ; limiting voltage 100 V (DC)	ΔR/R max.: ± 1.5 % + 0.1 Ω
4.25.1		endurance	1000 hours at 70 °C; P _n or V _{max}	ΔR/R max.: ± 1.5 % + 0.1 Ω
4.8.4		temperature coefficient	between - 55 °C and + 155 °C (TC × 10 ⁻⁶ /K)	≤ ± 200
4.7		voltage proof on insulation	700 V (RMS) during 1 minute; V-block method	no breakdown
4.12		noise	"IEC publication 60195"	max. 5 μV/V
4.6.1.1		insulation resistance	500 V (DC) during 1 minute; V-block method	R _{ins} min.: 10 ⁴ MΩ
4.13		short time overload	room temperature; dissipation 6.25 × P _n (voltage not more than 2 × limiting voltage); 10 cycles; 5 s on and 45 s off	ΔR/R max.: ± 2.0 % + 0.05 Ω
4.26		active flammability "Cheese-cloth test"	steps of: 5/10/16/25/40 × P _n (RMS) duration 5 minutes	no flaming of gauze cylinder
OTHER TEST IN ACCORDANCE WITH IEC 60695				
2.2		passive flammability "Needle-flame test"	application of test flame for 20 s	no ignition of product; no ignition of under-layer; burning time less than 30 s



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.